

SHRP-P-678

Mechanistic Evaluation and Calibration of the AASHTO Design Equations and Mechanistic Analysis of the SHRP Asphalt Surfaced Pavement Sections

Gilbert Y. Baladi and Francis X. McKelvey
Civil and Environmental Engineering
Michigan State University



Strategic Highway Research Program
National Research Council
Washington, DC 1994

SHRP-P-678
Contract P-020B

Program Manager: *Neil F. Hawks*
Project Manager: *A. Robert Raab*
Production Editor: *Marsha Barrett*
Program Area Secretary: *Cindy Baker*

February 1994

key words:
aashto equations
asphalt pavement
mechanistic analysis
pavement performance
stress analysis

Strategic Highway Research Program
National Academy of Sciences
2101 Constitution Avenue N.W.
Washington, DC 20418

(202) 334-3774

The publication of this report does not necessarily indicate approval or endorsement of the findings, opinions, conclusions, or recommendations either inferred or specifically expressed herein by the National Academy of Sciences, the United States Government, or the American Association of State Highway and Transportation Officials or its member states.

© 1994 National Academy of Sciences

Acknowledgments

The research described herein was supported by the Strategic Highway Research Program (SHRP). SHRP is a unit of the National Research Council that was authorized by section 128 of the Surface Transportation and Uniform Relocation Assistance Act of 1987.

Contents

ABSTRACT	1
EXECUTIVE SUMMARY	3
1.0 GENERAL	3
2.0 OBSERVATIONS OF THE AASHTO DESIGN PROCEDURE FOR FLEXIBLE PAVEMENTS	3
3.0 MECHANISTIC EVALUATION/CALIBRATION OF THE AASHTO DESIGN PROCEDURE	4
4.0 MECHANISTIC EVALUATION OF THE ASPHALT SURFACED GPS SECTIONS	6
CHAPTER 1 - INTRODUCTION AND BACKGROUND	7
1.1 GENERAL	7
1.1.1 Study Objectives	7
1.1.2 Technical Approach	7
1.1.3 Technical Task	8
1.2 BACKGROUND AND GENERAL OBSERVATIONS	8
1.3 MECHANISTIC BASED APPROACHES	10
1.4 MECHANISTIC ANALYSIS - MISSING DATA ELEMENTS	10
1.4.1 Load	11
1.4.2 Resilient Modulus	11
1.4.3 Poisson's Ratios	14
1.4.4 Layer Thicknesses	14
1.4.5 Environmental Data	14
1.4.6 Cumulative Number of 18-kips Equivalent Single Axle Load Applications	14

CHAPTER 2 - RESEARCH APPROACH	17
2.1 DATA ANALYSIS - THE ORIGINAL PLAN	17
2.2 MODIFIED WORK PLAN FOR THE MECHANISTIC EVALUATION OF THE AASHTO FLEXIBLE PAVEMENT DESIGN EQUATIONS	21
CHAPTER 3 - MECHANISTIC EVALUATION OF THE AASHTO FLEXIBLE PAVEMENT DESIGN EQUATION	25
3.1 PHASE 1 - THE 1986 AASHTO DESIGN PROCEDURE	25
3.1.1 Step 1 - Full Factorial Experiment Design Matrix	25
3.1.2 Step 2 - Secondary Variables	26
3.1.3 Step 3 - Insignificant Variables	26
3.1.4 Step 4 - AASHTO Design Parameters (Layer Coefficients)	27
3.1.5 Step 5 - Outputs of the AASHTO Thickness Design	27
3.1.6 Observations of the AASHTO outputs	29
3.2 PHASE 2 - MECHANISTIC ANALYSIS	34
3.3 PHASE 3 - MECHANISTIC EVALUATION OF THE AASHTO DESIGN EQUATIONS	34
3.3.1 Performance Period and Service Life of a Pavement Structure	34
3.3.2 Engineering Criteria for the Mechanistic Evaluation of the AASHTO Design Equations	46
3.3.3 Evaluation of the AASHTO Design Equations	49
3.4 Conclusions of the Mechanistic Evaluation of the AASHTO Design Equations	63
3.5 Important Features Relative to the Calibration of the AASHTO Flexible Design Equations	72
3.5.1 The Concept of the AASHTO Structural Number	72
3.5.2 The Concept of the AASHTO Main Design Equation	76
CHAPTER 4 - MECHANISTIC EVALUATION OF THE AASHTO DRAINAGE ... COEFFICIENTS	87
4.1 PHASE 4 - MECHANISTIC EVALUATION OF THE CONCEPT OF THE AASHTO DRAINAGE COEFFICIENT	87
4.1.1 The AASHTO Drainage Coefficients	87
4.1.2 Mechanistic Evaluation of the AASHTO Drainage Coefficients	89

4.1.2.1	Layer Thickness Modification Method	90
4.1.2.2	Layer Coefficient Modification Method	95
4.1.2.3	Mechanistic-Based Modification of the AASHTO Drainage Coefficient Procedure	106
4.1.2.4	Comparison of the Results of the Three Methods	108
4.1.3	Alternative Perspective of the AASHTO Drainage Coefficient	130
CHAPTER 5 -	EVALUATION OF THE AASHTO CONCEPT OF LOSS OF SERVICEABILITY DUE TO ENVIRONMENTAL FACTORS	137
5.1	PHASE 5 - THE AASHTO CONCEPT OF LOSS OF SERVICEABILITY DUE TO ENVIRONMENTAL FACTORS	137
5.1.1	Serviceability Loss	137
5.1.2	Roadbed Swelling	138
5.1.3	Frost and Heave	138
5.2	EVALUATION OF THE AASHTO CONCEPT OF LOSS OF SERVICEABILITY	140
CHAPTER 6 -	MECHANISTIC ANALYSIS OF THE ASPHALT SURFACED PAVEMENT SECTIONS	149
6.1	GENERAL	149
6.2	IMPORTANT ISSUES RELATIVE TO THE MODULUS COMPUTER PROGRAM AND THE BACKCALCULATED LAYER MODULUS VALUES	149
6.3	MECHANISTIC ANALYSIS OF THE SHRP ASPHALT SURFACED PAVEMENT SECTIONS	160
CHAPTER 7 -	SUMMARY AND CONCLUSIONS	163
7.1	SUMMARY	163
7.2	CONCLUSIONS	164
7.2.1	The AASHTO Design Procedure	164
7.2.1.1	Observations	164
7.2.1.2	Conclusions	164
7.2.2	The AASHTO Drainage Coefficient Concept	166

7.2.2.1	Observations	166
7.2.2.2	Conclusions	166
7.2.3	Loss of Serviceability Due to Environmental Factors	166
7.2.3.1	Observations	166
7.2.3.2	Conclusions	166
7.2.4	Backcalculation of Layer Moduli	167
7.2.4.1	Observations	167
7.2.4.2	Conclusions	167
7.2.5	Mechanistic Evaluation of the Asphalt Surface Pavement Sections	167
7.2.5.1	Observations	167
7.2.5.2	Conclusions	168
CHAPTER 8	- RECOMMENDATIONS	169
8.1	RECOMMENDATIONS	169
8.1.1	The AASHTO Design Equations	169
8.1.2	The AASHTO Concept for Drainage Coefficient	169
8.1.3	AASHTO Concept for Loss of Serviceability Due to Environmental Factors	170
8.1.4	Backcalculation of Layer Moduli	170
8.1.5	Future LTPP Data Analysis	171
REFERENCES	173
APPENDIX A	- RESULTS OF THE MECHANISTIC ANALYSIS OF THE ASPHALT SURFACED PAVEMENT SECTIONS	

List of Tables

Table 1.	Recommended values and ranges of resilient moduli for various materials.	12
Table 2.	Values of Poisson's ratios used in the mechanistic analysis.	15
Table 3.	Layer thicknesses and moduli of the pavement sections of cells 141, 114, and 87 of figure 1 (effective resilient modulus of the roadbed soil of 5 ksi, performance period of 20 years, and 20,000,000 18-kips ESAL).	48
Table 4.	Layer thicknesses and moduli of the pavement sections of cells 141, 150, and 159 of figure 1 (effective resilient modulus of the roadbed soil of 5 ksi, performance period of 20 years, and 20,000,000 18-kips ESAL).	50
Table 5.	Layer thicknesses and moduli of the pavement sections of cells 141, 60, and 222 of figure 1 (effective resilient modulus of the roadbed soil of 5 ksi, performance period of 20 years, and 20,000,000 18-kips ESAL).	51
Table 6.	Mechanistic responses of the pavement sections of cells 141, 114, and 87 of figure 1 due to an 18-kips ESAL.	53
Table 7.	Mechanistic responses of the pavement sections of cells 141, 150, and 159 of figure 1 due to an 18-kips ESAL.	54
Table 8.	Mechanistic responses of the pavement sections of cells 141, 60, and 222 of figure 1 due to an 18-kips ESAL.	55
Table 9.	The outputs of the AASHTO design method and the mechanistic responses of pavement sections 60, 87, 141, 114, 150, 159, and 222.	64

Table 10.	Layer thicknesses and moduli of the pavement sections of cells 156, 159, and 162 of figure 1 (performance period = 20 years, 18-kips ESAL = 20,000,000).	78
Table 11.	Mechanistic responses of the pavement sections of cells 156, 159, and 162 of figure 1.	79
Table 12.	The AASHTO Design Guide definitions of quality of drainage and the recommended drainage coefficients.	88
Table 13.	Layer thicknesses and moduli, structural number, and mechanistic responses for various drainage coefficients of pavement section 162 (AASHTO 1986, thickness modification method).	91
Table 14.	Layer thicknesses and moduli, structural number, and mechanistic responses for various layer coefficients of pavement section 162 (the 1986 AASHTO procedure - layer coefficient modification method). . . .	99
Table 15.	Layer thicknesses and moduli, structural number, and mechanistic responses for various layer coefficients of pavement section (mechanistic-based modification of the 1986 AASHTO procedure).	109
Table 16.	The required pavement structural numbers for various values of loss of serviceability due to swelling and frost heave conditions.	142
Table 17.	Material properties and design parameters of pavement sections 160 and 162.	143
Table 18.	Pavement cross-sections (data supplied by the SHRP office).	151
Table 19.	The average deflection basins and loads (data supplied by the SHRP office).	152
Table 20.	Comparison of layer moduli of ten analytical pavement sections backcalculated by using MODULUS and MICHBACK computer programs (after correcting the CHEVRON program in MICHBACK).	153

List of Figures

Figure 1. Full factorial experiment design matrix, material properties, and levels of traffic volume in terms of 18-kip equivalent single axle load.	23
Figure 2. The AASHTO produced structural number for the 243 pavement sections of figure 1.	28
Figure 3. The total thicknesses of the 243 pavement sections of figure 1.	30
Figure 4. The AASHTO produced thicknesses of the asphalt layer for the 243 pavement sections of figure 1.	31
Figure 5. The AASHTO produced thicknesses of the base layer for the 243 pavement sections of figure 1.	32
Figure 6. The AASHTO produced thicknesses of the subbase layer for the 243 pavement sections of figure 1.	33
Figure 7. The compressive vertical stresses at the top of the base layer for the 243 pavement sections of figure 1.	35
Figure 8. The compressive vertical stresses at the top of the subbase layers of the 243 pavement sections of figure 1.	36
Figure 9. The compressive vertical stresses at the top of the roadbed soil for the 243 pavement sections of figure 1.	37
Figure 10. The tensile stresses at the bottom of the AC layers for the 243 pavement sections of figure 1.	38
Figure 11. The vertical deflections at the top of the AC layers of the 243 pavement sections of figure 1.	39

Figure 12. The vertical deflection at the top of the base layers of the 243 pavement sections of figure 1.	40
Figure 13. The vertical deflections at the top of the subbase layers of the 243 pavement sections of figure 1.	41
Figure 14. The vertical deflections at the top of the roadbed soils of the 243 pavement sections of figure 1.	42
Figure 15. The initial and terminal PSI values and the performance period used in the AASHTO design of all 243 pavement sections of figure 1.	44
Figure 16. Comparison of service life and performance period of a pavement structure.	45
Figure 17. The remaining service life of a pavement structure calculated by using the distress data and the rate of deterioration of that pavement.	47
Figure 18. Peak deflections at the top of each pavement layer of sections 141, 114, and 87.	57
Figure 19. Vertical compressive strains at the top of each pavement layer and at the top of the roadbed soil for Sections 60, 87, 114, 141, 150, 159, and 222.	58
Figure 20. Peak deflections at the top of each pavement layer of sections 141, 150, and 159.	60
Figure 21. Peak deflections at the top of each pavement layer of sections 60, 141, and 222.	61
Figure 22. Peak pavement surface deflections of the seven indicated pavement sections.	65
Figure 23. The amount of compression in the AC layer of the seven indicated pavement sections.	66
Figure 24. The amount of compression in the base layer of the seven indicated pavement sections.	67
Figure 25. The amount of compression in the subbase layer of the seven indicated pavement sections.	68

Figure 26. The amount of compression in the roadbed soil of the seven indicated pavement sections.	69
Figure 27. The vertical strains induced at the top of each pavement layer for the indicated pavement sections.	70
Figure 28. The vertical strain induced at the bottom of each pavement layer for the indicated pavement sections.	71
Figure 29. Tensile stress at the bottom of the AC layer of the seven indicated pavement sections.	73
Figure 30. The ratio of the tensile stress at the bottom of the AC layer to its resilient modulus for the seven indicated pavement sections.	74
Figure 31. The AASHTO chart for estimating the structural layer coefficient of dense-graded asphalt concrete based on the elastic (resilient) modulus.	77
Figure 32. Peak deflection at the top of each pavement layer and roadbed soil for the indicated pavement sections.	80
Figure 33. The amount of compression in each pavement layer and in the roadbed soil of the indicated pavement sections.	82
Figure 34. The vertical strains at the top of the layers of the indicated pavement sections.	83
Figure 35. The vertical strains at the bottom of the layers of the indicated pavement sections.	84
Figure 36. Structural number versus drainage coefficient (AASHTO 1986, thickness modification method).	92
Figure 37. Layer thicknesses versus drainage coefficient (AASHTO 1986, thickness modification method).	93
Figure 38. Peak deflection at top of layers versus drainage coefficient (AASHTO 1986, thickness modification method).	94
Figure 39. The amount of compression in each layer versus drainage coefficient (AASHTO 1986, thickness modification method).	96
Figure 40. The vertical strain at the top of each layer versus drainage coefficient (AASHTO 1986, thickness modification method).	97

Figure 41. The tensile stress at the bottom of the AC layer versus drainage coefficient (AASHTO 1986, thickness modification method).	98
Figure 42. Structural number versus drainage coefficient (AASHTO 1986, layer coefficient modification method).	101
Figure 43. Layer thicknesses versus drainage coefficient (AASHTO 1986, layer coefficient modification method).	102
Figure 44. Peak deflection at top of layers versus drainage coefficient (AASHTO 1986, layer coefficient modification method).	103
Figure 45. The amount of compression in each layer versus drainage coefficient (AASHTO 1986, layer coefficient modification method).	104
Figure 46. The vertical strain at the top of each layer versus drainage coefficient (AASHTO 1986, layer coefficient modification method).	105
Figure 47. The tensile stress at the bottom of the AC layer versus drainage coefficient (AASHTO 1986, layer coefficient modification method).	107
Figure 48. Structural number versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).	110
Figure 49. Layer thicknesses versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).	111
Figure 50. Peak deflection at top of layers versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).	112
Figure 51. The amount of compression in each layer versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).	113
Figure 52. The vertical strain at the top of each layer versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).	114
Figure 53. The tensile stress at the bottom of the AC layer versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).	115
Figure 54. Comparison of the structural number versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	117

Figure 55. Comparison of the thicknesses of the AC layer thicknesses versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	118
Figure 56. Comparison of the thicknesses of the base layer thicknesses versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	119
Figure 57. Comparison of the thicknesses of the subbase layer thicknesses versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	121
Figure 58. Comparison of the amount of compression in the AC layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	122
Figure 59. Comparison of the amount of compression in the base layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	123
Figure 60. Comparison of the amount of compression in the subbase layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	124
Figure 61. Comparison of the vertical strain at the top of the AC layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	126
Figure 62. Comparison of the vertical strain at the top of the base layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	127
Figure 63. Comparison of the vertical strain at the top of the subbase layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	128
Figure 64. Comparison of the vertical strain at the top of the roadbed soil versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	129
Figure 65. Comparison of the vertical stress at the bottom of the AC layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.	131

Figure 66. Effective structural number versus the permissible number of 18-kip ESAL.	132
Figure 67. Percent gain and loss in pavement service life versus drainage coefficient.	133
Figure 68. A conceptual example of the environmental serviceability loss versus time graph that may be developed for specific location ⁽⁸⁾	139
Figure 69. The required pavement structural number versus the serviceability loss due to environmental conditions.	144
Figure 70. The incremental increase in the structural number versus the serviceability loss due to environmental conditions.	145
Figure 71. Equivalent roadbed resilient modulus that produces the same increases in the required pavement structural number as those required for environmental serviceability loss.	147
Figure 72. Absolute percent error in the AC modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.	155
Figure 73. Absolute percent error in the base modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.	156
Figure 74. Absolute percent error in the subbase modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.	157
Figure 75. Absolute percent error in the roadbed modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.	158
Figure 76. Cumulative absolute percent errors in all layer moduli for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.	159
Figure 77. Cumulative absolute percent errors in all layer moduli for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program and the MICHBACK computer program.	161

MECHANISTIC EVALUATION OF THE AASHTO FLEXIBLE DESIGN EQUATIONS

ABSTRACT

Mechanistic evaluation of the AASHTO flexible design equations was conducted by using 243 artificial pavement sections with various layer properties, roadbed soil modulus, and traffic volumes. Throughout the analyses it is assumed that the mechanistic responses (stresses, strains, and deflections) of the pavement sections due to an applied 9000-pound of load are indicative of the level of damage delivered to these sections. Results of the analyses indicated that while the AASHTO design method produces pavement sections with an almost equal level of protection, the damage delivered to the various layers vary from one section to another.

It is also shown that the AASHTO method does not consistently accounts for the effects of the drainage quality (drainage coefficient) on the layer thicknesses and/or on the pavement responses. A mechanistic-based modification procedure of the effects of the AASHTO drainage coefficient is presented. It is shown that the mechanistic-based method produces more consistent pavement sections and that the variations of their mechanistic responses are much less than those produced by the AASHTO method. Further, a nomograph for estimating the effects of drainage coefficients on the expected life of the pavement structures is also presented and discussed.

Finally, the results of the backcalculated layer moduli of some of the SHRP asphalt surfaced GPS sections are presented and the accuracy of the backcalculated modulus values is briefly discussed.

MECHANISTIC EVALUATION OF THE AASHTO FLEXIBLE DESIGN EQUATIONS

EXECUTIVE SUMMARY

1.0 GENERAL

Michigan State university has proposed an innovative and unique approach for the mechanistic evaluation, calibration and revision of the AASHTO design equations. The study is based on mechanistic evaluations of the AASHTO design procedures using the data from the SHRP database relative to the SHRP asphalt surfaced GPS sections. Because of the gaps in the database and missing data elements (e.g., layer moduli or layer coefficients) that are required for the mechanistic analysis, the research plan was modified as follows:

1. Establish a full factorial experiment design matrix that consists of 243 artificial flexible pavement sections. For each section, assign material properties and traffic volumes (in terms of 18-kips ESAL), within the typical ranges used by various State Highway Agencies (SHAs). Design each pavement section (determine the required layer thicknesses) by using the AASHTO design procedure. Use the layer thicknesses and the material properties to calculate the mechanistic responses (stresses, strains, and deflections) of each pavement sections.
2. Analyze the sensitivity of the mechanistic responses to the layer thicknesses determined by the AASHTO procedure. Evaluate and revise as possible the AASHTO design equations and the concept of drainage coefficients.

In addition, when some values of the layer moduli that were backcalculated by using deflection data and the MODULUS backcalculation computer program for some of the SHRP GPS sections became available, they were examined. During the process, the consistency of the MODULUS program was examined. The study has been completed on March 28, 1993. Based on the results, several observations and conclusions were made and are summarized below.

2.0 OBSERVATIONS OF THE AASHTO DESIGN PROCEDURE FOR FLEXIBLE PAVEMENTS

Analyses of the 243 pavement sections and of the AASHTO flexible pavement design equations have confirmed the present knowledge regarding the AASHTO design procedure. This knowledge and findings are enumerated below.

1. The dependent variable of the AASHTO main design equation is the structural number (SN) of the pavement. The SN is a function of the traffic volume (18-kips ESAL), the design reliability, the overall standard deviation, the total serviceability loss during the performance period, and the resilient modulus of the roadbed soil. The structural number is computed so that the pavement will have the required structural capacity to carry the

anticipated traffic load and volume and it will experience the specified loss of serviceability during the performance period. Hence, for any pavement structure, the AASHTO required SN is independent of the quality and properties of the asphalt, base, and subbase layers. The properties (e.g., layer coefficients) of these layers play a major role in determining the thickness of each layer but not the required SN.

2. After determining the required SN of a pavement section, the layer thicknesses are computed by using the AASHTO recommended layer analysis method. In this regard, the AASHTO assumes that the required SN of a pavement is the sum of the structural number of each of its layers. Further, the structural number of any pavement layer is the product of its layer and drainage coefficients and its thickness. That is the SN of a relatively weak pavement layer can be enhanced by increasing its thickness.
3. Although the AASHTO design guide advocates the use of good quality materials with reasonable costs, the AASHTO design procedure assumes that the effects of drainage on the pavement performance can be eliminated by adjusting the thickness (by using a drainage coefficient) of the affected layer. That is a base layer with an excellent drainage quality would perform exactly the same as that with poor drainage quality if the thickness of the latter is increased by the ratio of the values of their drainage coefficients.
4. The effects of serviceability loss due to environmental conditions (freeze-thaw and swelling soils) can be eliminated by increasing the required SN of the pavement. Higher environmental loss of serviceability requires higher SN.

3.0 MECHANISTIC EVALUATION/CALIBRATION OF THE AASHTO DESIGN PROCEDURE

An experiment design matrix consists of 243 pavement sections was designed and, for each section, the thicknesses of its layers were determined by using the AASHTO design procedure. The mechanistic responses (stresses, strains, and deflections) of each pavement section were then computed and their sensitivity to the AASHTO determined layer thicknesses was analyzed. Results of the sensitivity analysis indicates:

1. For pavement sections with various layer properties that have been designed by using the AASHTO procedure to be supported on the same roadbed soil, to carry the same traffic volume, and to have the same serviceability loss during an equal performance period, the mechanistic analyses indicate that:
 - a) The peak pavement surface deflection (a mechanistic response) is almost the same for all sections. This implies that the AASHTO design procedure produces consistent pavement sections relative to the deflection delivered to the pavements. Hence, the results of the mechanistic analyses tend to support the structure and validity of the SN concept in the main AASHTO design equation.

- b) The induced stresses and strains experienced by any one pavement layer vary from one pavement section to another. This implies that the AASHTO design method produces inconsistent results relative to these mechanistic responses. Hence, the results of the mechanistic analyses do not support the AASHTO layer coefficient nor the AASHTO concept that the SN of the pavement is the sum of the SN of its layers.
 - c) The tensile stress and the ratio of the tensile stress to the asphalt layer modulus induced at the bottom of the AC layer vary from one pavement section to another and they are dependent on the properties and thicknesses of all pavement layers. This implies that the AASHTO design procedure produces inconsistent pavement sections relative to fatigue damage. Once again, the results of the mechanistic analyses do not support the AASHTO layer coefficient nor the AASHTO concept that the SN of the pavement is the sum of the SN of its layers.
2. For pavement sections with the same layer properties that have been designed by using the AASHTO procedure to be supported on various roadbed soils, to carry the same traffic volume, and to have the same serviceability loss during an equal performance period, the mechanistic analyses indicate that the stresses, strains, and deflections induced in the pavements are not the same. This implies that the role of the resilient modulus of the roadbed soil in the AASHTO main design equation is not accurate.
3. For pavement sections with the same layer properties but different drainage coefficients that have been designed by using the AASHTO procedure to be supported on the same roadbed soils, to carry the same traffic volume, and to have the same serviceability loss during an equal performance period, the results of the mechanistic evaluations indicate that:
- a) The magnitudes of the deflections, stresses, and strains induced in the various pavement sections due to a 9000-pounds load vary from one pavement section to another. That is the AASHTO design method does not produce consistent results relative to the mechanistic responses. Hence, the results of the mechanistic analyses do not support the role of the drainage coefficient (in adjusting the layer thicknesses) in the AASHTO design procedure.
 - b) Mechanistic calibration of this role was undertaken. After several trials, the following mechanistic-based modifications of the role of the AASHTO drainage coefficients are recommended:

$$a_{ei} = (a_i)(m_i)^{0.5}; \text{ and } MR_{RBd} = (MR_{EFF})(m_3)^{0.5}$$

where a_{ei} = the effective layer coefficient of layer "i";
 a_i = the layer coefficient of layer "i"; and
 m_i = the drainage coefficient of layer "i".

MR_{DSN} = the design value of the resilient modulus of the roadbed soil;
 MR_{EFF} = the effective resilient modulus of the roadbed soil; and
 m_3 = the drainage coefficient of the subbase material or of the layer immediately above the roadbed soil.

The mechanistic-based modification of the effects of the AASHTO drainage coefficients produces consistent pavement sections where the mechanistic responses due to traffic loads are almost the same.

4. The effects of drainage coefficient on the pavement performance was also analyzed from different perspective. Rather than using the drainage coefficient to decrease or increase the layer thicknesses, the impact of the quality of drainage on the service life of the pavement was assessed and presented in an easy to read nomograph. The method allows the pavement design engineer to analyze the cost and benefits of improving the drainage quality. This makes the effects of drainage quality on the pavement performance compatible with that for loss of serviceability due to environmental factors.
5. Results of the mechanistic evaluation of the AASHTO concept of loss of serviceability due to environmental factors indicated that:
 - a) The AASHTO loss of serviceability concept is a linear one (the total loss of pavement serviceability is the sum of the loss of serviceability due to traffic and the losses due to swelling and frost heave potentials). The concept does not account for the interaction between the various serviceability losses. Although, from the mechanistic viewpoint, the AASHTO concept seems to be reasonable.
 - b) The loss of serviceability due to environmental conditions can also be expressed in term of the effective roadbed resilient modulus.

4.0 MECHANISTIC EVALUATION OF THE ASPHALT SURFACED GPS SECTIONS

Mechanistic evaluation of the asphalt surfaced pavement sections was conducted on the basis of the values of the layer moduli backcalculated by using the MODULUS program and the layer thicknesses found in the NPPD. The evaluation was limited to those pavement sections and deflection test locations where the backcalculated layer modulus values have passed the SHRP quality control check. Results of the analysis indicates that:

1. The values of the layer moduli backcalculated by using the SHRP modified version of MODULUS program are neither accurate nor reasonable.
2. The degree of confidence in the backcalculated layer modulus values is poor at best.
3. The MODULUS program needs further evaluation and calibration prior to its use in future backcalculation of layer moduli.

CHAPTER 1

INTRODUCTION AND BACKGROUND

1.1 GENERAL

This report presents the procedures used for the mechanistic evaluation and calibration of the AASHTO flexible pavement design equations and the mechanistic evaluation of the SHRP's GPS asphalt surfaced pavement sections. These procedures were proposed to be used in contract P-020b "Data Analysis" of the Long Term Pavement Performance (LTPP) studies of the Strategic Highway Research Program (SHRP).

The goal of the LTPP studies established by the "Strategic Transportation Research Study" and adopted by the Advisory Committee on Pavement Performance is:

"TO INCREASE PAVEMENT LIFE BY INVESTIGATION OF THE VARIOUS DESIGNS OF PAVEMENT STRUCTURES AND REHABILITATED PAVEMENT STRUCTURES, USING DIFFERENT MATERIALS AND UNDER DIFFERENT LOADS, ENVIRONMENTS, SUBGRADE SOIL, AND MAINTENANCE PRACTICES."

The objectives of contract P-020b "Data Analysis" of the SHRP's LTPP program and the technical approach and tasks to accomplish these objectives are presented in the next subsections.

1.1.1 Study Objectives

The objectives of this study are:

1. Develop a strategic approach to the analysis of the LTPP database.
2. Implement the analytical approach.
3. Develop plans for future data analysis.

1.1.2 Technical Approach

Use a mechanistic-based analysis procedure and the LTPP database (to the extent pertinent data is available when needed) to evaluate the AASHTO design equations.

Conduct mechanistic analyses of asphalt-surfaced General Pavement Sections (GPS) using the layer thicknesses found in the LTPP database and backcalculated layer moduli determined by the SHRP-specified procedure.

1.1.3 Technical Tasks

Task 1 - Review BRE/ERES research plan and other P-020 proposals. Attend DAWG Meeting (Washington, D.C., July 1990). Prepare and present a research plan at SHRP midcourse meeting (Denver, Colorado, August 1990). Prepare and submit a revised research plan.

Task 2 - Evaluate AASHTO design equations using a mechanistic-based design procedure. Assess the concepts of (a) layer coefficient, (b) loss of serviceability, and (c) drainage coefficient.

Task 3 - Conduct mechanistic analyses of asphalt-surfaced GPS sections using backcalculated layer moduli and layer thicknesses found in the LTPP database. Tabulate all results (stresses, strains, and deflections).

Task 4 - Develop future research recommendations and prepare a final report.

To this end, the materials in this report are divided according to its topics and they are organized into 8 chapters and 1 appendix as follows:

Chapter 1 - Introduction and background.

Chapter 2 - Research approach.

Chapter 3 - Mechanistic evaluation of the AASHTO flexible pavement design equation.

Chapter 4 - Mechanistic evaluation of the AASHTO drainage coefficients.

Chapter 5 - Mechanistic evaluation of the AASHTO loss of serviceability due to environmental conditions.

Chapter 6 - Mechanistic analysis of the asphalt surfaced pavement sections.

Chapter 7 - Conclusions.

Chapter 8 - Recommendations.

Appendix A contains the results (mechanistic responses) of the mechanistic analysis of the asphalt surfaced General Pavement Sections (GPS).

1.2 BACKGROUND AND GENERAL OBSERVATIONS

Empirical pavement design procedures are derived from experience or observation alone, often without detailed consideration of system behavior or pavement theory.

Empirically derived relationships defining the interaction between performance, load, and pavement thickness for a given geographical location and climatic condition are the basis for many existing design methods. These methods or models are generally used to determine the required pavement layer thicknesses, the number of load applications required to cause failure or the occurrence of distress due to pavement material properties, subgrade type, environmental, and traffic conditions ^(1 through 6).

One advantage in using empirical models is that they tend to be simple and easy to use. Unfortunately, they are usually only accurate for the exact range of conditions for which they have been developed. They may be invalid outside the range of variables used in the development of the method. In addition, the engineering interpretations of most purely empirical equations are meaningless and/or misleading. The AASHTO, Corps of Engineers, Louisiana, and Utah design methods are among a large family of empirical pavement design methods that were primarily developed on the basis of observed field performance ⁽¹⁾.

The AASHTO pavement design methods for flexible pavements are based on results obtained from the AASHO Road Test conducted in the late 1950's and early 1960's in northern Illinois. The methods are empirical and relate pavement performance measurements and the loss of serviceability directly to the traffic volume and loading characteristics, the modulus of subgrade reaction, layer coefficients, and environmental factors that were present at the road test. The methods (design equations) have been generalized to make them applicable to broader sets of design variables ^(1, 5).

Recently, the AASHTO design equations were enhanced to include design reliability, the resilient modulus of the roadbed soil, material variability and drainability, and construction quality. Further, the pavement performance period can be adjusted for environmentally-induced losses of serviceability such as frost heave.

The present AASHTO model contains several deficiencies and limitations because of the nature of the AASHO Road Test experiment. For example, the model is directly applicable only to the northern Illinois climate and the specific subgrade and materials used for the pavement/ subgrade structure at the Road Test. Further, the model is based on an accelerated procedure for accumulating traffic, which includes only two years of environmental effects in conjunction with several years of traffic load. These deficiencies have been reduced to some extent by the incorporation of the experience of several State Highway Agencies (SHA) with pavements located in different climatic conditions and with different materials and traffic.

For overlays, the AASHTO method requires the estimation of remaining life factor of the existing pavement. This factor can be estimated using various procedures presented in the 1986 AASHTO design guide. The experience of many State Highway Agencies has indicated the inadequacy of the overlay procedure due to the lack of sufficient guidance to estimate the remaining life factor ^(1, 5, 8).

Since the AASHO Road Test, many other pavement performance and distress prediction models have been developed for both flexible and rigid pavements and have been incorporated into various design models. Each model was developed by using a specific pavement database and model development techniques and is, therefore, subject to limitations and is generally applicable only for specific conditions. None of these models were developed on the basis of mechanistic response of the various pavement layers to the applied traffic load. Hence, a new and innovative approach needs to be developed whereby observed pavement distresses are directly related to the mechanistic responses of the various pavement layers due to a passing wheel load ^(1 through 16).

1.3 MECHANISTIC BASED APPROACHES

A proper pavement performance prediction model that yields reasonable engineering interpretations should be based on the mechanistic responses (stresses, strains, and deflections) of the pavement structure due to a passing wheel load. The performance models can be obtained using two approaches, statistical and theoretical. The statistical approach consists of relating the calculated pavement mechanistic responses to the observed pavement distresses (this is called mechanistic-empirical models) ⁽¹⁾. The theoretical approach, on the other hand, models the pavement structure and its boundary values, and the load related distresses (e.g., rutting and alligator cracking) using various available theories ^(1, 5). The main disadvantage of the theoretical approach is that it tends to be complicated and it requires substantial material and boundary value inputs that are not available or are not measured by most State Highway Agencies (SHA). The main advantage of the mechanistic-empirical models, on the other hand, is that the required inputs are readily available in most SHA. Hence, such models can be developed using data from the National Pavement Performance Database and/or any other pavement management system database that contains pavement distress data and the mechanistic responses of the pavement structures in question.

For any pavement section, the mechanistic response due to an applied load cannot be obtained unless data elements relative to the pavement section in question, the engineering properties of the paving materials, the environment, and loads are known. Unfortunately, some of these data elements are not available in the National Pavement Performance Database (NPPD). Consequently, a procedure needs to be established to assign values to the necessary but missing data elements based upon the descriptive terms found in the database. Such a procedure is presented in the next section.

After developing the performance models, the AASHTO design equations can then be evaluated, calibrated and revised. To optimize the benefits of such evaluation and revision, the procedure(s) must be capable of properly investigating the validity of the various concepts and assumptions embedded in the AASHTO procedures.

1.4 MECHANISTIC ANALYSIS - MISSING DATA ELEMENTS

As stated earlier, some of the data elements that are required for mechanistic analysis of the asphalt surfaced pavement sections are currently missing from the National Pavement

Performance Database (NPPD). In the following subsections, procedures to establish the values of the missing data elements for mechanistic analysis of the asphalt surfaced GPS pavement sections are presented.

1.4.1 Load

It is suggested herein that a 9,000-pound wheel load (half of the standard 18-kips Equivalent Single Axle Load "ESAL") be used in the analysis of all pavement sections. The advantage of this is that the mechanistic responses (stress and strain) can be directly compared and/or related to the AASHTO design equations without the need to use equivalent single axle load factors. In addition, it is recommended that a tire pressure of 82 psi be used throughout the mechanistic analysis. This represents a typical tire pressure value for a semi and it produces a tire-pavement contact radius of 5.91-inch which is compatible to that of the Falling Weight Deflectometer (FWD).

1.4.2 Resilient Modulus

Since the resilient modulus of any road element is not available, efforts is being expanded to obtain such data from the appropriate State Highway Agency. If such efforts are fruitless, then the descriptive terms found in the SHRP database regarding that road element should be used to estimate its resilient modulus. Values of the resilient modulus can also be obtained by using the nondestructive deflection data of the pavement section in question. However, since one of the major objectives of this study is to calibrate the AASHTO design equations, it is highly recommended that, if available, the laboratory values of the resilient modulus be used rather than those obtained by using backcalculation routines. The reason for this is that, during the design process of new or reconstructed pavements, the only values of the resilient moduli available at the time are those obtained from laboratory tests. Hence, these values are to be used as input to the AASHTO design equations. If these values are not available, then layer moduli backcalculated by using nondestructive deflection testing data can be used.

For each pavement layer, the descriptive terms in the database can be directly or indirectly used to estimate the types of roadbed material and other layers, aggregate angularity, material drainability, and, perhaps, classification of the various materials. Using these characteristics, one can assign a resilient modulus value for each layer by using either:

1. The AASHTO layer coefficient and the equivalent resilient modulus (charts are provided in the AASHO design guide); or
2. The data listed in Table 1.

For each pavement layer, the assigned value of the resilient modulus depends on several factors including:

Table 1. Recommended values and ranges of resilient moduli for various materials.

Soil/aggregate type	Resilient modulus (psi)			
	Mean	Upper	Lower	Saturated
Silty sands	8,000	12,000	6,000	4,000
Sand & gravel	12,000	20,000	8,000	6,000
Sand/aggregate blends	20,000	26,000	10,000	7,000
Crushed stone	25,000	40,000	15,000	12,000
Limerock	40,000	60,000	30,000	25,000
Slag	55,000	70,000	45,000	40,000
Asphalt stabilized	120,000	200,000	90,000	70,000
Cement stabilized	500,000	700,000	400,000	300,000
Lime stabilized	Depends on type (increase modulus by 20%)			

1. The thickness of the materials above the layer in question, since the value of the resilient modulus is stress dependent.
2. The gradation of the aggregates.
3. The time period that the degree of saturation of the material exceeds 80 percent.
4. The angularity of the aggregates.
5. The type and amount of stabilizing agent.

For the asphalt course, the resilient modulus of the asphalt mix depends upon the penetration of the asphalt binder, the percent air voids in the asphalt, the percent and type of mineral filler, the angularity and type of the aggregate in the mix, aggregate gradation, and the range of air temperature. It is recommended that the original penetration data of the asphalt binder be used to estimate the resilient modulus of the asphalt mix. The modulus can be estimated either by using the Asphalt Institute equation or by using the following equation developed by Baladi for the FHWA ^(1, and 15 through 20).

$$\ln(M_R) = 16.1 - 0.0366(T) - 0.140(AV) - 0.000341(CL) - 0.0435(ANG) + 0.000979(KV) \quad (\text{Eq. 1.1})$$

$$R^2 = 0.997 \quad \text{S.E.} = 0.033$$

where:

- \ln = Natural logarithm;
- M_R = resilient modulus (psi);
- T = average yearly temperature (°F)
- AV = air voids in the asphalt mix (%);
- ANG = aggregate angularity (1 rounded, 2 river gravel, 4 crushed, and 3 a combination by weight of 50% crushed and 50 percent river gravel);
- KV = kinematic viscosity of the asphalt mix (centistoke);
- R^2 = ; and
- S.E. = standard error.

If data concerning the indirect tensile or indirect compressive strength is available, then the following equations can be used to estimate the resilient modulus ⁽¹⁷⁾:

$$\ln(M_R) = 6.1776 + 1.08108[\ln(\text{INCS})] + 0.14(AV) - .00034(L) \quad (\text{Eq. 1.2})$$

$$R^2 = 0.996 \quad \text{S.E.} = 0.085$$

$$\ln(M_R) = 7.3667 + 1.08335[\ln(\text{INTS})] + 0.14(AV) - .00034(L) \quad (\text{Eq. 1.3})$$

$$R^2 = 0.996 \qquad S.E. = 0.083$$

where: INTS = indirect tensile strength (psi);
 INCS = indirect compressive strength; and
 L = load (pounds).

1.4.3 Poisson's Ratios

The value of Poisson's ratio has a minimum impact on the mechanistic responses of a pavement section. Hence it is recommended herein that (unless Poisson's ratio data is available in the data bank) the values listed in table 2 be used for all pavement sections.

1.4.4 Layer Thicknesses

Layer thickness data is one of the most important element relative to mechanistic analysis. The effects of layer thicknesses on the mechanistic response of any pavement section are very high. For most asphalt surfaced pavement sections, data elements relative to layer thicknesses are available in the SHRP data bank. Some of these data have been, or are in the process of being, verified by coring the pavement sections in question. In addition, regardless of the accuracy of the thickness data, the actual layer thickness will vary. It is recommended herein that the data in the data bank relative to layer thicknesses be used and that only a small number of sites be analyzed by using the thickness data as well as the standard deviation of each layer thickness if available.

1.4.5 Environmental Data

The performance of asphalt surfaced pavements is also dependent on the environmental factors such as temperature, freezing index, number of freeze-thaw cycles, and intensity and duration of rainfall. In general, temperature has substantial effects on the asphalt course and lesser effects on the other layers. On the other hand, moisture has substantial effects on all layers under the asphalt course and much lesser effects on the asphalt course itself (assuming that the AC mix is not moisture susceptible). That is, the effects of moisture on the asphalt course relative to rutting and alligator cracking are derived from the effects of moisture on the other pavement layers. For the mechanistic analysis, it is suggested herein that the average annual air temperature be used to determine the resilient modulus of the asphalt course and that the moduli of the other pavement layers be estimated at or near saturation point (spring condition), if applicable. However, in the event that detailed data regarding the effects of moisture and temperature on the resilient characteristics of the pavement layers becomes available, then this data should be used.

1.4.6 Cumulative Number of 18-kips Equivalent Single Axle Load Applications

For a roadway segment, a SHA typically estimates the number of 18-kips equivalent single axle load (ESAL) applications by multiplying the average daily traffic (ADT) data by the percent commercial (or percent trucks) and by an ESAL factor. Although, the ADT and

Table 2. Values of Poisson's ratios used in the mechanistic analysis.

Pavement Material	Poisson's Ratio
Asphalt concrete	0.30
Base layer	
Unbound granular material	0.35
Stabilized granular material	0.30
Subbase layer	
Unbound subbase layer	0.40
Stabilized granular subbase layer	0.35
Subgrade soil	
Clay	0.45
Silt	0.42
Sand	0.40
Expansive soils	0.50

the percent commercial data elements are relatively accurate, the ESAL factor being used needs to be verified. Some highway agencies have used weigh in motion data to verify or to establish a new ESAL factor. In some cases, the ESAL factor was increased by as much as 50 percent.

For this study, it is recommended that the number of 18-kips ESAL data (when available) be examined to determine the source of the estimation. If the data are based on an unverified ESAL factor, then weigh in motion data should be requested when possible. Otherwise, engineering judgement should be used to determine the possible variation in the data. If the number of ESAL is not available in the data base, then the number can be estimated from weigh in motion and ADT data.

For studying rut and fatigue cracking, using the ESAL data alone implies that all other types of traffic (e.g., automobiles, pickups) are assumed to have a little to no contribution to rutting and/or fatigue cracking (the values of the AASHTO Load Equivalency Factors (LEF) for these vehicles are very small). While this assumption may be correct for sound pavements with thick asphalt course (thicker than 2 to 4 inches), it may not be correct for thin pavements. Hence, the ADT data should also be included in conjunction with the ESAL data to analyze rut and fatigue cracking.

CHAPTER 2

RESEARCH APPROACH

2.1 DATA ANALYSIS - THE ORIGINAL PLAN

In this study, an original plan consisting of several steps was developed to accomplish the data analysis. These steps are:

1. Establish a databank for mechanistic analysis and assign values to the missing data elements from the NPPD. The procedures to be used in assigning the values of the missing data elements are outlined in chapter 4 of this report.
2. Conduct mechanistic analysis of each pavement section and tabulate the mechanistic responses (stresses, strains, and surface deflection) at various locations in a data base (file). The data file will include the following data and mechanistic responses and their corresponding locations:
 - a) The SHRP ID number.
 - b) The number of layers.
 - c) The layer number.
 - d) Layer type (AC, base, subbase, and roadbed), layer modulus (psi), and the layer poisson's ratio.
 - e) The depth in inches under the center of the loaded area at which the mechanistic responses are tabulated.
 - f) The deflection; radial, vertical, and shear stresses; and the vertical and radial strains at the top and bottom of the AC, base, and subbase layers, and at the top of the subgrade.
 - g) The radial distances in inches from the center of the loaded area at which the mechanistic responses are tabulated.
 - h) The surface deflection, vertical and radial stresses, and radial strains at the center of the loaded area and at radial distances of 8, 12, 18, 24, 36, and 60 inches from the center of the loaded area.
3. Use the same databank and the AASHTO design procedure to estimate the structural number of each pavement section and the number of design ESAL.
4. Statistically correlate the mechanistic responses to the distress data (rut depth and alligator cracks) to develop mechanistic-based pavement performance models.
5. Analyze the sensitivity of the mechanistically-based performance models and the AASHTO design equations to the various input variables including layer moduli and layer coefficients to investigate the validity of the concepts of layer coefficient and the loss of serviceability due to environmental factors. In this regard, two basic questions need to be addressed:

- a) Are the existing AASHTO nomographs relating material properties (e.g., modulus) and layer coefficients valid and accurate?
 - b) What are the engineering interpretations of such correlations? For example, for similar pavement performance, the AASHTO design equations assume that (for the same input parameters) if the value of a layer coefficient is increased by a factor of 2 then the thickness of that layer can be halved. That is, the problem of a weak material can be solved by increasing its thickness. From the engineering point of view, decreasing strength yields higher strains (higher damage) and hence, higher rut potential. Hence, using weaker material (for economic reasons) may not be economical after all. In addition, the AASHTO design guide indicates that loss of serviceability due to environmental factors (i.e., swelling soil and frost heave) is additive to that due to traffic. In this regard, can the problems of swelling soil and frost heave be overcome by providing a thicker AC surface?
6. The validity of the overall statistical correlation of each equation (that is, the engineering interpretations of the equations) needs to be fully explained so that a proper diagnosis of the pavement problems can be obtained.
7. Examine the concept of the AASHTO drainage coefficients and their effects on the pavement design outcome. In this regard, the 1986 AASHTO design guide allows the use of thicker layers to solve drainage problems. That is, bad drainage implies lower drainage coefficient and hence, a thicker pavement layer. This concept/problem needs to be investigated along with the values of the drainage coefficients. Only after obtaining an accurate solution of the problem, the highway engineer can make a correct decision regarding the cost (a thin drainable layer versus a thick and nondrainable one) of the pavement structure and its expected performance.
8. Examine the concept of the Load Equivalency Factor (LEF). In this regard, two issues must be considered:
 - a) For a given pavement section, is the value of LEF constant with time?. That is, since pavement deteriorates with time and its effective structural number, thickness, or structural capacity decreases with increasing traffic, should the value of LEF increase? Or, is the value of the LEF representative of the average value during the life of the pavement? If this is so, what is the validity of the AASHTO LEF since it was developed based on only two years of environmental damage? That is, should the LEF of two similar pavement sections located in different environmental regions be the same?
 - b) For a given pavement section and a given truck type and load, is the value of LEF relative to roughness the same as that relative to fatigue? Stated differently, is the relative roughness damage delivered by a given truck equal to the relative fatigue damage delivered by the same truck? If not, then what values of LEF should be used for the various distress prediction models?

9. The concept of Present Serviceability Index (PSI) and roughness - The AASHTO equations are based on the PSI which is highly correlated to pavement roughness in terms of the average slope variance in the wheel paths. Patching, cracking, and rutting have minor effects on the PSI. In addition, most State Highway Agencies use roughometers that measure pavement roughness in terms of inch/mile ^(1, 8 and 21 through 38). Some agencies have already calibrated their devices to the 1/4 car International Roughness Index (IRI) while others are in the process of calibrating their devices. Hence, the present PSI equations cannot be used by most SHA. A correlation between the IRI and the PSI must be developed prior to the evaluation of the AASHTO equations. Such correlation will have countless benefits to all SHA as well as to their pavement management systems. Nevertheless, two preliminary statistical equations relating the PSI and the IRI have been developed and are being used by the State of Maine DOT and the State of South Carolina DOT as follows:

State of Maine DOT

$$PSI = 9.577 - \{4.394[\log(IRI/5.9597)]\}; \quad 5 > PSI > 0.0 \quad (\text{Eq. 1.5})$$

State of South Carolina DOT

$$PSI = 5\{\exp[-0.0286(IRI)]\} \quad (\text{Eq. 1.6})$$

where: IRI = the International Roughness Index (in/mile);
 PSI = pavement serviceability index;
 log = log to base 10; and
 exp = exponential.

Although the South Carolina's equation seems to be better (it has the standard PSI range) than the Maine's (maximum possible PSI is 5), the accuracy and sensitivity of both equations need to be examined prior to their use in this research.

The implication of the original plan for data analysis is that the AASHTO equations must be evaluated using several techniques. Each technique should be capable of providing the proper engineering interpretations of the resulting equation. The specific technique to be used will depend on the data availability. For example, the inventory data (layer thicknesses and properties) from the National Database can be used to conduct a mechanistic analysis of the various pavement sections for the purposes of calculating the stresses and strains induced in the pavement due to a wheel load and the resulting pavement surface deflections. The mechanistic analysis can be conducted using several available computer programs such as ILLI-PAVE, MICHPAVE, VESYS, CHEVRON and others (MICHPAVE will be used in this study)^(1, 25, 34). Statistical analysis can then be used to correlate the load related distress data (e.g., rutting, fatigue cracking) to the calculated stresses, strains, deflections, and layer thicknesses and properties. If such correlations can be found then the effects of the various material properties (e.g., resilient modulus) on pavement distresses can be found. Since selected material properties

are correlated to layer coefficient in the AASHTO procedure, then the validity of such correlations can be investigated and, perhaps, calibrated. Such an investigation can be accomplished by studying the sensitivity of the AASHTO loss of serviceability to variations in the values of the layer coefficients. It is the opinion of the authors that mechanistic-based pavement prediction models can be found for most pavement distresses and that this technique will lead to the proper evaluation of the AASHTO equations and will optimize the benefits of the study.

Using the mechanistic evaluation procedure, another type of verification may be appropriate to determine whether specific material parameters/properties can be ignored from consideration in the pavement performance model (it possesses a little to no effect on the results). The following discussion is for illustrative purposes only, insofar as reference to statistical correlations between material properties and their mechanistic responses (stresses, strains, and deflections) to load and pavement performance is concerned. Several results (again, using LTPP data and material properties) are possible including:

1. Certain material properties (e.g., resilient modulus) appear to have specific effects on pavement performance which can be related to certain identifiable patterns of those properties using the inventory data of the various pavement sections.
2. Certain material properties (e.g., Poisson's ratio) appear to have no effect on pavement performance. That is, regardless of the range of the property and its variation, the pavement performance is more or less constant for the range of that property.
3. Variations in the values of the pavement performance appear to be related to variations in the material properties.

The results of such evaluations will have potential impacts on this study as well as on other SHRP projects such as A-005 and A-003A. Hence, preliminary and final findings obtained by other SHRP contractors and by SHA will be consulted and the findings of this study must be communicated to them.

One additional and very important point should be addressed relative to the overall objectives of the LTPP studies. The findings of the studies must address the concerns of the State Highway Agencies. Hence, they should be delivered in an implementable form without causing additional burden on the agencies.

The original plan for data analysis was designed with the end results in mind. It was thought that implementation of the end results of the original plan will benefit all State Highway Agencies, in particular, and the highway community, in general. These benefits include:

1. Calibrated and revised AASHTO design equations based on the mechanistic response of the various pavement layers.

2. Quantified understanding of the effects of loading, environment, material properties and variability, construction quality, and maintenance levels on pavement distress and performance.
3. Mechanistic-based pavement distress prediction models that include most load related distresses.
4. Development of a strategic approach for the analysis of future LTPP data that supports the overall goals of SHRP and LTPP and reflects the priority needs of the State Highway Agencies through the appraisal of the potential of the data to effectively meet those needs.
5. An equation for the calculation of PSI and loss of serviceability based on the IRI.
6. Modification or recommendations for modifications of the equivalent load factors (LEF) to be used in the design of pavement structures as well as in the prediction of pavement distresses.
7. A better understanding of the factors that affect pavement design and performance.
8. Improvement to existing pavement management systems
9. Improved method for calculating the remaining life of the pavement structure and hence, improved overlay design procedure.
10. Implementation of the analysis approach so that final products are delivered by September of 1992.

As stated above, the original plan calls for the conduct of the mechanistic evaluation of the AASHTO design equations by using the data elements (resilient moduli or layer coefficients) of the SHRP GPS sections. However, such data elements were not available throughout the duration of this study. Consequently, a new plan for the mechanistic-based evaluation of the AASHTO design equations was established. This plan is presented in the next section.

2.2 MODIFIED WORK PLAN FOR THE MECHANISTIC EVALUATION OF THE AASHTO FLEXIBLE DESIGN EQUATIONS

As stated earlier, originally, it was planned to conduct the mechanistic evaluation of the AASHTO design equations by using the appropriate data elements (resilient moduli or layer coefficients and layer thicknesses) of the NPPD data base for the SHRP GPS sections. However, such data elements were not available during this study. Hence, the exercise to assign values to the missing data elements according to an approved research plan (see section 1.4) was not performed. After consultation with the SHRP office and the members of the Expert Technical Group (ETG) of this study, a modified work plan for the mechanistic evaluation of

the AASHTO design equation was established and approved. The modified work plan consists of five phases as follows:

PHASE 1 - Establish a full factorial experiment design matrix that consists of 243 cells (each cell represents a pavement section). Design each pavement section by using the 1986 AASHTO design procedure and establish the layer thicknesses. The full factorial experiment design matrix is shown in figure 1.

PHASE 2 - Conduct mechanistic analysis of each pavement section of step 1 by using MICHPAVE computer program and determine its mechanistic responses due to an 18-kip single axle load.

PHASE 3 - Compare the resulting mechanistic responses to determine whether or not the outputs of the AASHTO design procedure are reasonable.

Phase 4 - Select pavement sections from figure 1. Redesign (by using the AASHTO design procedure) the layer thicknesses based on four additional values of the drainage coefficients of the base layer and two values of the drainage coefficients of the subbase layer. Conduct mechanistic analysis of each redesigned section and then mechanistically evaluate the concept of drainage coefficients.

Phase 5 - Select pavement sections from figure 1. Redesign (by using the AASHTO design procedure) the layer thicknesses based on two additional values of loss of serviceability due to environmental factors. Conduct mechanistic analysis of each redesigned section and then mechanistically evaluate the concept of loss of serviceability.

Each of the three phases were accomplished in several steps. Details for each phase and the corresponding steps are presented in the next chapter of this report.

				100						300						500					
				10			25			40			10			25			40		
Roadbed (ksi)	ESAL (10 ⁶)	Subbase (ksi)	Base (ksi)	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
				10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
1	5	10	20	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
				19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
				37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54
5	10	20	5	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72
				73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90
				91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108
10	20	5	10	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126
				127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144
				145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162
20	5	10	20	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180
				181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198
				199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216
5	10	20	5	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234
				229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246
				247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264

Figure 1. Full factorial experiment design matrix, material properties, and levels of traffic volume in terms of 18-kip equivalent single axle load.

CHAPTER 3

MECHANISTIC EVALUATION OF THE AASHTO FLEXIBLE PAVEMENT DESIGN EQUATION

3.1 PHASE 1 - THE 1986 AASHTO DESIGN PROCEDURE

The outputs (thickness design) of the AASHTO design equations are affected by numerous variables. While some of these variables are very important to this study, others have no significant impacts. Therefore, the variables affecting the AASHTO design procedure were separated into three categories as follows:

1. Variables that have immediate impacts on this study and they should be included as primary variables. These include material properties (resilient modulus and/or layer coefficient), the resilient modulus of the roadbed soil, and the traffic volume in terms of 18-kips single axle load ^(1, 4, 8, and 39 through 58).
2. Variables that have some impact on this study but they can be considered as secondary variables. Hence, their effects on the AASHTO design outputs can be addressed after analyzing the effects of the primary variables. The secondary variables are the drainage coefficients and loss of serviceability due to environmental factors ^(1, 8, and 51 through 58).
3. Variables that have no impact on the objectives of this study (insignificant variables) and hence they can be ignored by assuming a constant value for each one. These variables include reliability level of the design, the overall standard deviation, performance period, analysis period, economic factors (e.g., material costs, salvage value, discount rate, inflation rate), initial serviceability index, and terminal serviceability index ⁽¹⁾.

Because of the lack of the appropriate data elements in the National Pavement Performance Database (NPPD) and based on the three categories of variables listed above, the analysis of the AASHTO design equations was accomplished in several steps as presented below.

3.1.1 Step 1 - Full Factorial Experiment Design Matrix

Based on the three categories of variables presented in the previous section and in order to address the variability of the AASHTO design outputs due to changes in the value of each of the primary variables, a full factorial experiment design matrix was constructed. During the construction process, each of the five primary variables (resilient modulus of the AC, base, and subbase layers, resilient modulus of the roadbed soil, and cumulative traffic volume in terms of 18-kips ESAL) was given three values that fall within a typical range of values of each variable. These values are:

1. Resilient modulus of the AC materials of 100, 300, and 500 ksi.
2. Resilient modulus of the base materials of 10, 25, and 40 ksi.
3. Resilient modulus of the subbase material of 10, 15, and 25 ksi.
4. Effective resilient modulus of the roadbed soils of 1, 5, and 10 ksi.
5. Cumulative 18-kips ESAL of 5,000,000, 10,000,000, and 20,000,000.

Hence, the total number of cells (pavement sections) in the full factorial experiment design matrix is 243 (three levels for each of the five variables, $3^5 = 243$ cells). Figure 1 depicts the full factorial experiment design matrix. The matrix consists of 243 cells (for convenience and easy reference, the cells are numbered from 1 to 243). Each cell represents one artificial pavement section. For each cell (pavement section) the material properties (resilient modulus) assigned to the asphalt surface, base and subbase layers, and roadbed soil, and the traffic volume in terms of 18-kips equivalent single axle load are shown in the figure.

3.1.2 Step 2 - Secondary Variables

The following values of the secondary variables (variables that have some impacts on this study but they can be considered as secondary variables) were used in the AASHTO design of a flexible pavement section for each cell of figure 1 are:

1. Loss of Serviceability Due to Environmental Factors - It is assumed that the pavement material experiences no loss of serviceability due to frost heave or swelling soil. The evaluation of the concept of loss of serviceability due to frost and heave is presented in a later section of this report.
2. Drainage Coefficient - A value of the drainage coefficients of the base and subbase materials of 1.0 was assumed. The evaluation of the concept of drainage coefficient is presented in a later section of this report.

3.1.3 Step 3 Insignificant Variables

The following constant values of the insignificant variables (variables that have no impact on this study) were assumed and are used as inputs to the AASHTO design procedure for the design of a flexible pavement section for each cell of figure 1.

1. Analysis period of 20 years.
2. Performance period of 20 years.
3. Desired level of reliability of 95 percent.
4. An overall standard deviation of 0.45.
5. Serviceability index after initial construction of 4.2.
6. Design terminal serviceability index of 2.5
7. A discount rate of zero.
8. A salvage value of \$0.0.

9. For each layer, the material cost is zero.
10. No maintenance and/or rehabilitation cost is allowed.

3.1.4 Step 4 - AASHTO Design Parameters (Layer Coefficients)

In this step, the **1986 AASHTO Guide for Design of Pavement Structure** was used to convert the resilient modulus of each pavement layer to an equivalent layer coefficient. To be specific, the following figures and equations were used:

1. Figure 2.5 of the 1986 AASHTO Guide for the Design of Pavement Structures was used to convert the resilient modulus of the AC layer to an equivalent layer coefficient (a_1).
2. The layer coefficient of the base material (a_2) was calculated by using the following AASHTO equation (see page II-18 of the **1986 AASHTO Guide for Design of Pavement Structure**):

$$a_2 = 0.249[\text{LOG}_{10}(E_{\text{base}})] - 0.977 \quad (\text{Eq. 1.7})$$

where E_{base} = resilient modulus of the base material.

3. The layer coefficient of the subbase material (a_3) was calculated by using the following AASHTO equation (see page II-21 of the **1986 AASHTO Guide for Design of Pavement Structure**):

$$a_3 = 0.227[\log_{10}(E_{\text{subbase}}) - 0.839] \quad (\text{Eq. 1.8})$$

where E_{subbase} = resilient modulus of the subbase material.

In addition, for the thickness design of all pavement sections of figure 1, the layered design analysis found on pages II-37 and II-38 of the **1986 AASHTO Guide for Design of Pavement Structures** was used. Hence, unique layer thicknesses were obtained for each of the 243 pavement sections of figure 1. Stated differently, no subjective solution (arbitrary selection of layer thicknesses) of the AASHTO structural number equation was allowed.

3.1.5 Step 5 - Outputs of the AASHTO Thickness Design

In this step, the 1986 AASHTO design procedure (DNPS86 computer program) was used for the design of each of the 243 pavement sections of figure 1. Figure 2 shows the experiment design matrix of figure 1 except that the value listed in each cell of the matrix represents the structural number of the pavement section in question. It should be noted that the structural number for each pavement was calculated by using the following AASHTO equation:

		100										300										500									
		10					25					40					10					25					40				
		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
AC (ksi)		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
Base (ksi)		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
Subbase (ksi)		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
ESAL (10 ⁶)		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
Roadbed (ksi)		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
5		8.71																													8.71
1	10	9.47																													9.47
20		10.30																													10.30
5		5.41																													5.41
5	10	5.94																													5.94
20		6.51																													6.51
5		4.29																													4.29
10	10	4.75																													4.75
20		5.25																													5.25

Figure 2. The AASHTO produced structural number for the 243 pavement sections of figure 1.

$$SN = a_1 D_1 + a_2 D_2 m_2 + a_3 D_3 m_3 \quad (\text{Eq. 1.9})$$

- a_1, a_2, a_3 = the layer coefficient of the AC surface, base, and subbase, respectively;
- D_1, D_2, D_3 = the thicknesses of the AC, base, and subbase layers in inches, respectively; and
- m_2, m_3 = 1.0, the drainage coefficient of the base and subbase layers, respectively.

Figures 3, 4, 5, and 6 depict the total thickness, and the thicknesses of the AC, base, and subbase layers for all of the 243 pavement sections. It should be noted that these thicknesses were the direct outputs of the AASHTO DNPS 86 computer program. The software calculates the thickness of each layer by using the layered design analysis found on pages II-37 and II-38 of the 1986 AASHTO Guide for Design of Pavement Structures.

3.1.6 Observations of the AASHTO outputs

Examination of the AASHTO produced structural number (SN) of the 243 pavement sections (see figure 2) indicates that for constant values of traffic volume, design reliability, standard deviation, serviceability loss, and resilient modulus of the roadbed soil (any one row in figure 2), the SN is constant. That is, for any pavement section, the AASHTO design SN is dependent on only one material variable, the resilient modulus of the roadbed soil. The structural number is independent of the type and properties of the AC, base, and subbase materials. This observation was expected and it is well known to most of the AASHTO users. Recall that the initial and terminal serviceability index of all the 243 pavement sections are constant and are equal to 4.2 and 2.5, respectively, it implies that, during the 20 years performance period, all pavement sections located in any one row of figure 2 will carry the same amount of traffic and will receive an equal amount of damage due to traffic loading. Once again, the important point of this observation is that:

The AASHTO structural number is a function of only one material variable, the resilient modulus of the roadbed soil. It is independent of the type and quality of the AC, base, and subbase layers.

Examination of the thicknesses of the AC, base, and subbase layers depicted in figures 4, 5, and 6 indicates that:

1. The thickness of the AC layer is independent of the quality (resilient moduli) of the subbase material and roadbed soil.
2. The thickness of the base material is independent of the resilient moduli of the AC layer and roadbed soil.
3. The thickness of the subbase material is independent of the resilient moduli of the AC

	Roadbed (ksi)	ESAL (10 ⁶)	100												300												500												
			10				25				40				10				25				40				10				25				40				
			10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25				
			87.02	64.02	51.52	90.50	67.97	52.34	87.61	66.53	52.51	74.50	51.51	38.94	81.60	59.07	43.44	80.19	59.11	45.09	72.54	49.55	36.98	80.21	57.68	42.05	79.03	57.95	43.93	47.36	62.27	90.87	84.74	50.99	23.31	25.34	27.43	16.27	17.90
1	10	20	5		93.71	69.21	55.91	97.48	73.47	56.81	94.37	71.90	56.99	79.84	55.35	41.97	87.50	63.49	46.83	86.04	63.57	48.66	77.67	53.18	39.80	85.94	61.93	45.27	84.74	62.27	47.36	50.99	23.31	25.34	27.43	16.27	17.90	19.56	
5	10	20	5		39.92	34.02	30.86	43.37	37.97	31.72	40.48	36.53	31.89	27.37	21.52	18.32	34.47	29.07	22.82	33.06	29.11	24.47	25.41	19.56	16.36	33.08	27.68	21.43	31.90	27.95	23.31	25.34	27.43	16.27	17.90	19.56			
5	10	20	5		43.41	37.21	33.85	47.16	41.45	34.79	44.05	39.88	34.97	29.52	23.33	19.95	37.18	31.47	24.81	35.72	31.55	26.64	27.35	21.16	17.78	35.62	29.91	23.25	34.42	30.25	25.34	27.43	16.27	17.90	19.56				
5	10	20	5		47.16	40.66	37.03	51.14	45.10	38.03	47.84	43.43	38.24	31.81	25.26	21.68	39.98	33.94	26.87	38.50	34.09	28.90	29.41	22.86	19.28	38.24	32.20	25.13	37.03	32.62	27.43	16.27	17.90	19.56					
10	10	20	5		23.82	23.82	23.82	27.78	27.73	24.68	24.39	26.29	24.85	11.28	11.28	11.28	18.38	18.83	15.78	16.97	18.87	17.43	9.32	9.32	9.32	16.99	11.99	14.39	15.81	17.41	19.43	17.90	19.56	19.56	19.56	19.56	19.56		
10	10	20	5		26.41	26.41	26.41	30.15	30.63	27.35	27.04	29.06	27.53	12.51	12.51	12.51	20.17	20.65	17.37	18.71	20.73	19.20	10.34	10.34	10.34	18.61	13.14	15.81	17.41	19.43	17.90	19.56	19.56	19.56	19.56	19.56	19.56	19.56	
10	10	20	5		29.16	29.16	29.16	33.04	33.64	30.16	29.84	31.97	30.37	13.81	13.81	13.81	21.98	22.48	19.00	20.50	22.63	21.03	11.41	11.41	11.41	20.24	14.34	17.26	19.03	21.16	19.56	19.56	19.56	19.56	19.56	19.56	19.56	19.56	19.56

Figure 3. The total thicknesses of the 243 pavement sections of figure 1.

				100						300						500					
				10			25			40			10			25			40		
Roadbed (ksi)	ESAL (10 ⁶)	Subbase (ksi)	Base (ksi)	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
				23.82	23.82	23.82	26.41	26.41	26.41	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16
1	5			23.82	23.82	23.82	26.41	26.41	26.41	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16
	10			26.41	26.41	26.41	29.16	29.16	29.16	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81
	20			29.16	29.16	29.16	31.81	31.81	31.81	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46
5	5			23.82	23.82	23.82	26.41	26.41	26.41	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16
	10			26.41	26.41	26.41	29.16	29.16	29.16	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81
	20			29.16	29.16	29.16	31.81	31.81	31.81	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46
10	5			23.82	23.82	23.82	26.41	26.41	26.41	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16	29.16
	10			26.41	26.41	26.41	29.16	29.16	29.16	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81	31.81
	20			29.16	29.16	29.16	31.81	31.81	31.81	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46	34.46

Figure 4. The AASHTO produced thicknesses of the asphalt layer for the 243 pavement sections of figure 1.

and base layers. It is dependent on the resilient modulus of the roadbed soil. That is low values of the resilient modulus of the roadbed soil give thicker subbase layer but they do not affect the thicknesses of the other pavement layers.

3.2 PHASE 2 - MECHANISTIC ANALYSIS

Given the material properties listed in figure 1 and the layer thicknesses obtained from the AASHTO design procedure for the 243 pavement sections (see figures 4, 5, and 6), a mechanistic analysis of each section was conducted by using the linear option of the MICHPAVE computer program. Some of the results of the mechanistic analysis were also verified by using the CHEVRON5 computer program. It should be noted that for all mechanistic analysis, the following values of Poisson's ratios were assumed:

1. A value of Poisson's ratio of 0.3 was assumed for all AC layers regardless of their resilient moduli values.
2. A value of Poisson's ratio of 0.35 was assumed for all base material regardless of their resilient moduli values.
3. A value of Poisson's ratio of 0.4 was assumed for all subbase materials regardless of their resilient moduli values.
4. A value of Poisson's ratio of 0.45 was assumed for all roadbed soils regardless of their types or resilient moduli values.

Results of the mechanistic analysis (the mechanistic responses) of all 243 pavement sections are provided in the matrices shown in figures 7 through 14. These figures provide, respectively, the calculated compressive vertical stresses at the top of the base and subbase layers and at the top of the roadbed soil, the tensile stress at the bottom of the AC layer, and the peak deflections at the top of the AC surface, base and subbase layers as well as at the top of the roadbed soil.

3.3 PHASE 3 - MECHANISTIC EVALUATION OF THE AASHTO DESIGN EQUATIONS

3.3.1 Performance Period and Service Life of a Pavement Structure

Recall that the 243 pavement sections were assumed to have an initial (after construction) serviceability index of 4.2 and a terminal serviceability index of 2.5 as shown in figure 15. This implies that the minimum allowable serviceability index is 2.5. A pavement with a serviceability index of less than 2.5 is considered to be a substandard pavement (not a failed pavement). Further, in the AASHTO design process of all 243 pavement sections, a pavement design life (period) equal to its performance period of 20 years was used. Once again, any pavement designed for a 20 years performance period (also

AC (ksi)	100						300						500					
	10			25			40			10			25			40		
	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
Base (ksi)	1.25	1.25	1.46	1.71	1.53	1.81	2.15	2.38	2.91	1.69	2.18	2.58	1.94	1.47	1.80	1.84	2.38	2.91
Subbase (ksi)	4.11	4.11	5.03	6.84	4.37	4.96	6.71	4.58	5.18	5.07	5.84	7.83	11.63	9.03	9.37	9.37	11.63	11.22
ESAL (10 ⁶)	4.11	4.11	4.60	6.30	4.11	4.66	6.31	4.45	5.07	5.84	7.83	11.63	11.22	9.03	9.37	9.37	11.63	11.22
Roadbed (ksi)	12.5	12.5	14.6	17.1	15.3	18.1	21.5	23.8	29.1	16.9	21.8	25.8	19.4	14.7	18.0	18.4	23.8	29.1
1	16.45	18.44	19.58	21.08	18.99	23.12	16.84	19.43	23.62	17.65	20.36	24.71	16.45	18.44	19.58	21.08	18.99	23.12
	14.38	16.94	17.96	21.78	18.28	21.95	14.71	18.71	22.44	15.34	19.63	23.54	14.38	16.94	17.96	21.78	18.28	21.95
	10.39	12.72	13.66	16.04	10.18	11.16	13.69	16.08	12.74	10.63	12.89	15.20	10.39	12.72	13.66	16.04	10.18	11.16
5	5.90	5.90	6.90	8.92	5.51	6.46	7.91	9.23	11.41	5.90	6.90	8.92	5.90	5.90	6.90	8.92	5.51	6.46
	5.90	5.90	6.90	8.92	5.51	6.46	7.91	9.23	11.41	5.90	6.90	8.92	5.90	5.90	6.90	8.92	5.51	6.46
	5.90	5.90	6.90	8.92	5.51	6.46	7.91	9.23	11.41	5.90	6.90	8.92	5.90	5.90	6.90	8.92	5.51	6.46
10	9.18	12.42	12.42	13.22	11.16	13.57	15.64	17.30	20.23	9.18	12.42	12.42	13.22	11.16	13.57	15.64	17.30	20.23
	9.18	12.42	12.42	13.22	11.16	13.57	15.64	17.30	20.23	9.18	12.42	12.42	13.22	11.16	13.57	15.64	17.30	20.23
	9.18	12.42	12.42	13.22	11.16	13.57	15.64	17.30	20.23	9.18	12.42	12.42	13.22	11.16	13.57	15.64	17.30	20.23
20	12.42	15.28	15.28	17.52	12.30	15.12	17.30	20.23	23.74	12.42	15.28	15.28	17.52	12.30	15.12	17.30	20.23	23.74
	12.42	15.28	15.28	17.52	12.30	15.12	17.30	20.23	23.74	12.42	15.28	15.28	17.52	12.30	15.12	17.30	20.23	23.74
	12.42	15.28	15.28	17.52	12.30	15.12	17.30	20.23	23.74	12.42	15.28	15.28	17.52	12.30	15.12	17.30	20.23	23.74
50	19.43	21.18	22.60	24.45	19.43	23.62	28.81	34.00	40.19	19.43	21.18	22.60	24.45	19.43	23.62	28.81	34.00	40.19
	19.43	21.18	22.60	24.45	19.43	23.62	28.81	34.00	40.19	19.43	21.18	22.60	24.45	19.43	23.62	28.81	34.00	40.19
	19.43	21.18	22.60	24.45	19.43	23.62	28.81	34.00	40.19	19.43	21.18	22.60	24.45	19.43	23.62	28.81	34.00	40.19
100	23.12	24.35	26.45	28.81	23.12	28.81	34.00	40.19	48.28	23.12	24.35	26.45	28.81	23.12	28.81	34.00	40.19	48.28
	23.12	24.35	26.45	28.81	23.12	28.81	34.00	40.19	48.28	23.12	24.35	26.45	28.81	23.12	28.81	34.00	40.19	48.28
	23.12	24.35	26.45	28.81	23.12	28.81	34.00	40.19	48.28	23.12	24.35	26.45	28.81	23.12	28.81	34.00	40.19	48.28

Figure 7. The compressive vertical stresses at the top of the base layer for the 243 pavement sections of figure 1.

		100						300						500					
		10		25		40		10		25		40		10		25		40	
Roadbed (ksi)	ESAL (10 ⁶)	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25
AC (ksi)	Base (ksi)	Subbase (ksi)	5	7.00	8.85	11.15	14.25	9.27	11.93	7.13	8.19	6.42	5.59	11.15	11.15	7.12	9.06	11.51	8.47
				7.00	8.85	11.15	14.11	9.41	11.77	5.65	7.08	9.30	5.84	7.39	8.47	10.71	11.51	10.42	9.07
				7.00	8.85	11.15	14.01	9.42	11.48	50.10	59.76	45.18	50.84	60.42	44.28	50.10	52.04	63.38	44.28
1	10	20	5	9.86	12.73	15.27	9.27	11.95	14.35	8.34	10.59	12.66	14.46	9.41	11.77	5.65	7.08	9.30	5.84
				9.85	12.73	15.28	9.72	12.52	15.07	9.41	11.77	14.11	14.46	9.41	11.77	5.65	7.08	9.30	5.84
				8.85	10.76	13.12	9.47	11.64	14.38	9.25	11.32	13.87	14.01	9.42	11.48	50.10	59.76	45.18	50.10
5	10	20	5	10.43	12.84	15.93	10.01	12.29	15.21	9.42	11.48	14.01	14.01	9.42	11.48	50.10	59.76	45.18	50.10
				10.43	12.84	15.93	10.01	12.29	15.21	9.42	11.48	14.01	14.01	9.42	11.48	50.10	59.76	45.18	50.10
				45.18	50.84	60.42	44.29	50.14	60.05	40.89	46.02	54.59	46.77	39.69	46.02	50.10	52.04	63.38	44.28
5	10	20	5	58.20	68.11	79.92	64.54	68.70	80.82	57.84	67.73	79.46	80.39	62.46	66.98	76.32	79.15	88.58	96.19
				58.20	68.11	79.92	64.54	68.70	80.82	57.84	67.73	79.46	80.39	62.46	66.98	76.32	79.15	88.58	96.19
				60.69	71.24	83.88	60.22	70.75	83.40	58.54	68.54	80.39	80.39	62.46	66.98	76.32	79.15	88.58	96.19
10	10	20	5	60.78	71.30	83.87	58.61	68.73	80.79	53.53	62.46	72.93	72.93	60.36	69.26	79.15	88.58	96.19	104.30
				60.78	71.30	83.87	58.61	68.73	80.79	53.53	62.46	72.93	72.93	60.36	69.26	79.15	88.58	96.19	104.30
				62.16	71.50	81.99	66.58	70.91	81.33	60.36	69.26	79.15	79.15	60.36	69.26	79.15	88.58	96.19	104.30
106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60
				106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60
				106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60	106.03	122.32	138.43	103.60

Figure 10. The tensile stresses at the bottom of the AC layers for the 243 pavement sections of figure 1.

					100												300												500																																
					10				25				40				10				25				40				10				25				40																								
					10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25																					
					76.31	74.7	73.8	77.5	76.1	74.9	77.6	76.4	75.4	75.0	74.4	73.3	74.5	72.5	71.5	70.2	75.8	76.9	75.4	73.6	77.3	76.0	74.7	73.9	72.0	70.9	75.6	74.4	72.7	76.8	75.3	74.0	72.7	75.6	74.2																						
					ESAL (10 ⁶)																																																								
					Roadbed (ksi)																																																								
					5																																																								
					1																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								
					20																																																								
					5																																																								
					10																																																								

		100												300												500											
		10				25				40				10				25				40				10				25				40			
		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25			
		69.9	68.2	67.3	70.4	71.7	69.2	72.3	71.1	70.3	69.4	71.8	69.8	71.1	70.1	75.8	74.3	72.5	76.3	75.1	73.7	73.1	71.2	70.7	75.5	73.8	72.2	70.7	71.8	74.8	73.5	75.2	73.8				
Roadbed (ksi)		5				10				20				40				80				160				320				640				1280			
		1	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20			
		8.80	8.80	8.80	10.3	10.3	10.3	10.7	11.0	11.1	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4			
Subbase (ksi)		5				10				20				40				80				160				320				640				1280			
		1	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20			
		8.80	8.80	8.80	10.3	10.3	10.3	10.7	11.0	11.1	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4			
Base (ksi)		5				10				20				40				80				160				320				640				1280			
		1	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20	5	10	20			
		8.80	8.80	8.80	10.3	10.3	10.3	10.7	11.0	11.1	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4			
AC (ksi)		5				10				20				40				80				160				320				640				1280			

Figure 12. The vertical deflection at the top of the base layers of the 243 pavement sections of figure 1.

Roadbed (ksi)	ESAL (10 ⁶)	100												300												500																						
		10				25				40				10				25				40				10				25				40														
		10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25	10	15	25								
		AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)	AC (ksi)	Base (ksi)	Subbase (ksi)	ESAL (10 ⁶)							
1	10	69.9	68.2	67.3	69.7	69.1	68.6	69.2	70.3	68.9	68.6	68.6	69.2	73.1	69.8	68.6	70.1	72.2	71.4	71.0	71.5	72.0	72.5	72.9	72.4	71.2	70.8	70.7	71.8	71.4	71.2	73.2	70.8	71.6	71.8	71.4	71.6	72.2	72.9	72.5	72.4	70.8	71.0	72.5	72.4			
1	10	69.4	67.8	66.9	69.5	68.6	68.6	68.6	69.9	68.9	68.6	67.8	67.8	71.4	69.5	68.4	70.1	69.5	71.0	69.9	71.5	72.0	72.5	72.9	72.4	71.2	70.8	70.7	71.8	71.4	71.2	73.2	70.8	71.6	71.8	71.4	71.6	72.2	72.9	72.5	72.4	70.8	71.0	72.5	72.4			
20	20	66.7	64.9	63.4	66.7	65.6	67.8	67.8	69.3	68.3	67.8	67.8	67.8	71.4	69.5	68.4	70.1	69.5	71.0	69.9	71.5	72.0	72.5	72.9	72.4	71.2	70.8	70.7	71.8	71.4	71.2	73.2	70.8	71.6	71.8	71.4	71.6	72.2	72.9	72.5	72.4	70.8	71.0	72.5	72.4			
5	5	16.9	16.7	16.6	17.0	17.6	18.7	17.6	17.7	18.3	19.0	19.6	20.7	20.4	19.9	18.6	19.9	21.4	23.4	20.6	21.8	23.0	21.1	20.8	20.6	20.2	21.7	20.1	20.2	23.6	20.9	21.6	20.7	21.8	20.5	21.9	20.5	21.1	20.8	20.6	20.2	21.6	20.5	22.1	23.3			
5	10	16.0	15.9	15.8	16.2	16.6	17.6	16.6	16.8	17.1	17.8	19.6	19.3	19.1	18.6	18.6	19.9	21.7	19.2	20.2	21.4	19.7	19.5	19.3	18.9	18.9	20.1	18.9	18.2	21.9	19.5	20.5	20.1	21.7	20.4	21.9	20.5	21.1	20.8	20.6	20.2	21.6	20.5	22.1	23.3			
20	20	15.3	15.2	15.2	15.3	15.6	16.6	16.6	13.58	16.3	16.8	18.03	18.2	18.1	16.54	18.6	18.6	20.2	17.1	18.22	19.43	18.6	18.3	18.2	17.8	18.9	18.9	18.9	20.5	17.51	19.2	18.9	20.1	21.7	20.4	21.9	20.5	21.1	20.8	20.6	20.2	21.6	20.5	22.1	23.3			
5	5	10.0	10.0	10.0	10.0	11.0	12.2	10.7	10.7	11.7	12.5	13.5	13.5	13.5	16.2	16.2	14.5	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7		
10	10	9.30	9.30	9.30	9.30	10.1	11.2	9.90	9.90	10.6	11.4	12.3	12.3	12.3	16.2	16.2	14.5	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	
20	20	8.80	8.80	8.80	8.80	9.40	10.3	9.20	9.20	9.80	10.5	11.4	12.3	12.3	12.3	16.2	16.2	14.5	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7

Figure 13. The vertical deflections at the top of the subbase layers of the 243 pavement sections of figure 1.

called the Design Life "DL") is expected to serve the traveling public for a period of 20 years during which the serviceability index of the pavement is higher than the minimum allowable standard of 2.5. In general, some pavements may perform more than the assumed 20 year performance period, others less than the 20 year period, and still others, may have an actual performance period equal to the assumed one.

In order to better differentiate between the assumed performance period (assumed during the design process) and the actual performance period, the term "Service Life (SL)" is introduced herein. Hence, the service life of a pavement structure relative to its pavement serviceability index (PSI) can be defined as follows:

The Service Life of a pavement structure relative to its PSI is the actual time period in years between construction and/or rehabilitation and the present time.

Given the definition of the service life of the pavement, a second term "the Remaining Service Life (RSL)" can be defined as follows:

The Remaining Service Life (RSL) of a pavement structure relative to its PSI is the number of years between any time "t" where PSI data is collected and the expected time (based on the pavement rate of deterioration) at which the PSI reaches its terminal value (e.g., 2.5).

Given the above definitions, the SL of any pavement structure may be lower than, higher than, or equal to its assumed performance period (DL) as shown in figure 16.

Using the service life and the remaining service life as defined above, two aspects that are very important to State Highway Agencies are noted below:

1. Comparison of the SL of a pavement structure with the DL assumed during the design process will determine whether or not the design process and perhaps the construction practices need to be modified. That is the SL of a pavement can be used as feedback data to assess the design process and the construction practices used by the State Highway Agency.
2. Using the distress data (data collected periodically as a part of the pavement management process), the remaining service life (RSL) of each pavement section in question or the weighted average remaining service life of a part or the entire pavement network can be calculated as shown in figure 17. The RSL data can be used by various people within and outside the State Highway Agencies including:

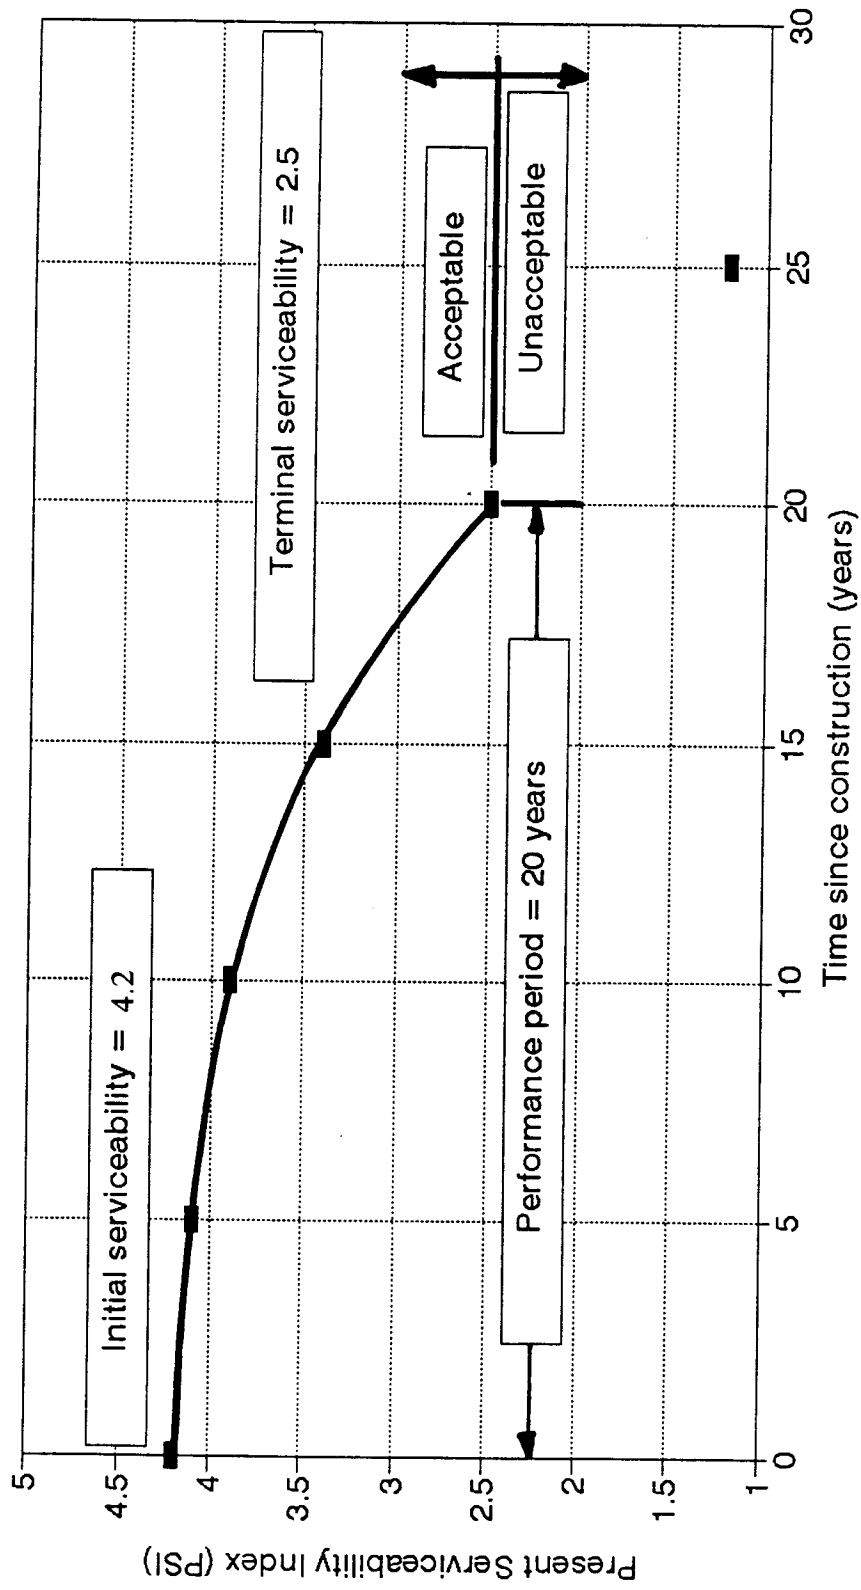


Figure 15. The initial and terminal PSI values and the performance period used in the AASHTO design of all 243 pavement sections of figure 1.

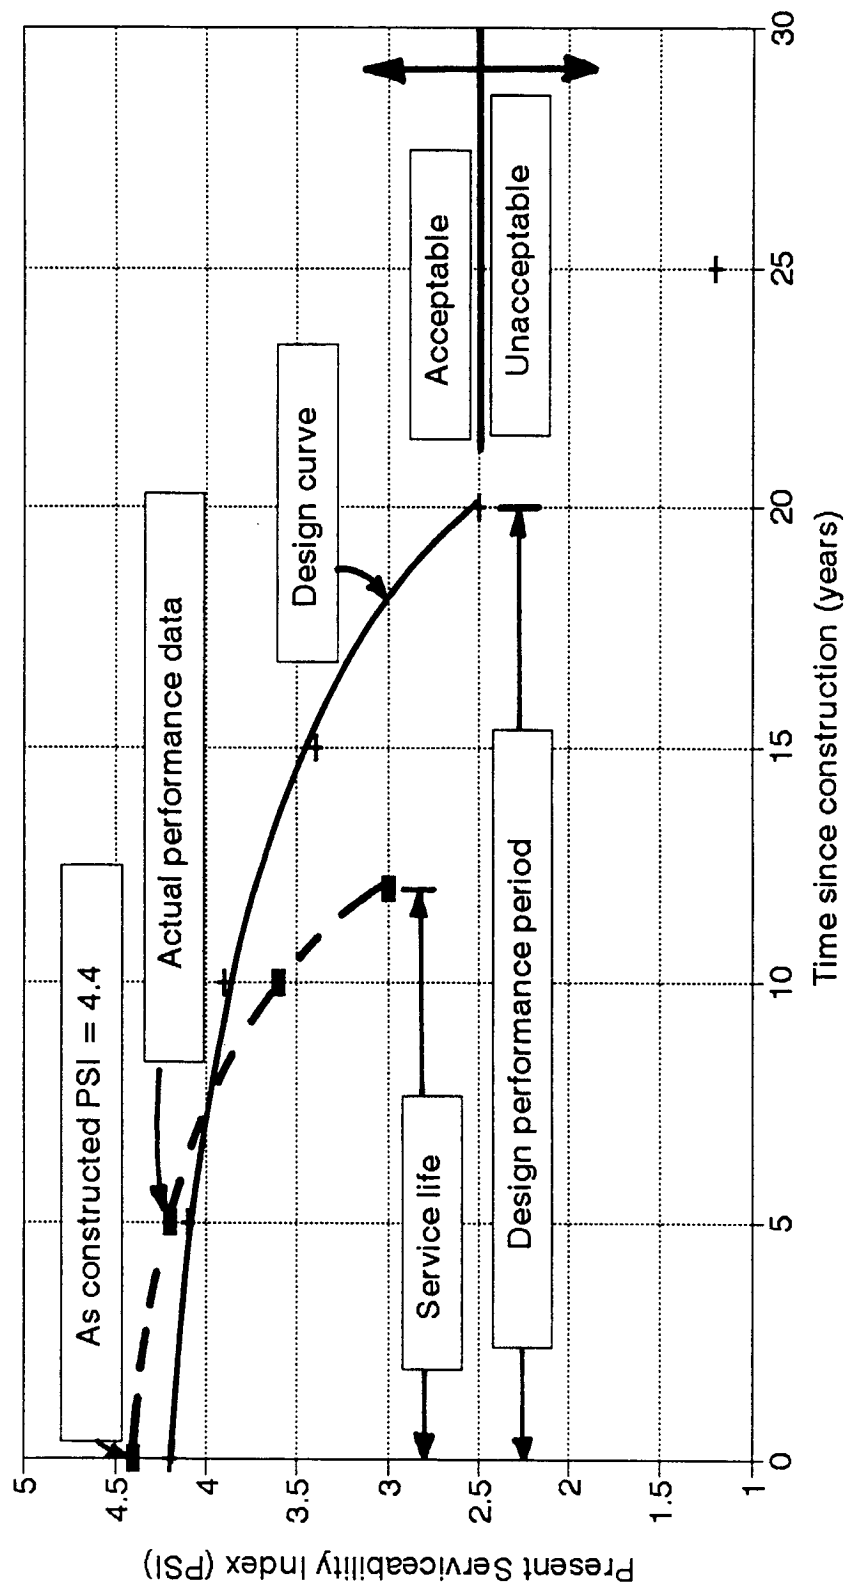


Figure 16. Comparison of service life and performance period of a pavement structure.

- a) Engineers to determine the optimum rehabilitation time of the pavement in question, to assess the impacts of various rehabilitation strategies on the health of the pavement network, and the optimum strategy that will produce an even pavement distribution in the various values of the RSL which produces a constant yearly work load for the State highway Agency.
- b) Managers to assess the state of the pavement network (the percentages of the network with 2, 5, 10, and 20 years of RSL), the percent of the users that are traveling on substandard roads, and future budgetary needs to maintain and/or improve the health of the system.
- c) Legislators to assess the impacts of the budget appropriation and future budgetary needs.
- d) Planners to determine present and future planning needs.

3.3.2 Engineering Criteria for the Mechanistic Evaluation of the AASHTO Design Equations

Recall that all 243 pavement sections were designed by using the AASHTO design procedure and that the total loss of serviceability during the performance period is 1.7 PSI (an initial PSI of 4.2 was assumed and a terminal PSI of 2.5 was used). Further, the results of the AASHTO design procedure (see figures 1 through 6) indicated that:

For a given value of the resilient modulus of the roadbed soil and for a constant traffic volume, the AASHTO design procedure produces pavement sections with a constant SN which provides an equal level of protection against traffic loading to all pavement layers regardless of the type and quality of the AC, base, and subbase layers.

For example, the three pavement sections of cells 141, 114, and 87 of figure 1 were designed by the AASHTO design procedure to have 20 years of service life (performance period) and to carry 20,000,000 ESAL during its service life. All three sections were made of the same materials except that the resilient modulus of the base layer varies from 40 to 25 and to 10 ksi for sections 141, 114, and 87, respectively. The AASHTO produced layer thicknesses and the layers resilient moduli of the three pavement-sections are listed in table 3. Since all three pavements were designed to serve the same number of 18-kips ESAL during the 20 years performance period, the amount of damage received by all three sections at the end of their design performance period is the same. This implies that the three pavement sections are designed to have the same level of protection against damage due to traffic load.

Similarly, the pavement-sections of cells 141, 150 and 159 (the only difference is the resilient modulus of the subbase layer, it varies from 10 to 15 and to 25 ksi) and of cells 141, 60, and 222 (the only difference is the resilient modulus of the AC layer, it varies from

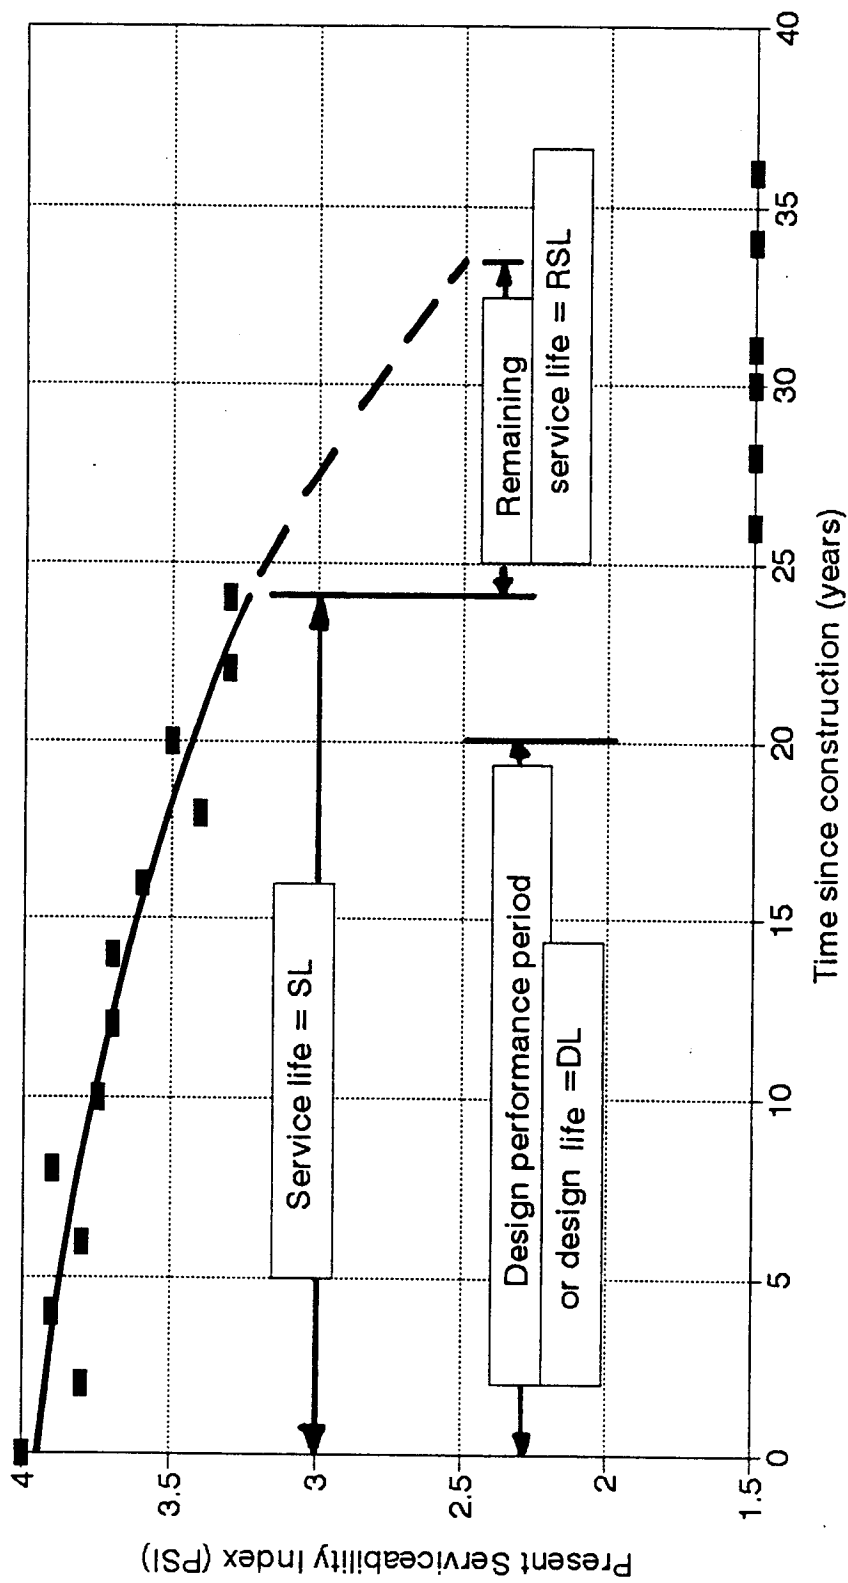


Figure 17. The remaining service life of a pavement structure calculated by using the distress data and the rate of deterioration of that pavement.

Table 3. Layer thicknesses and moduli of the pavement sections of cells 141, 114, and 87 of figure 1 (effective resilient modulus of the roadbed soil of 5 ksi, performance period of 20 years, and 20,000,000 18-kips ESAL).

Cell Number	Structural Number	Total Thickness (inch)	Layer Thicknesses (inches)			Layer Modulus (ksi)		
			AC	Base	Subbase	AC	Base	Subbase
141	6.51	38.5	8.41	12.09	18.0	300	40	10
114	6.51	39.98	10.04	11.94	18.0	300	25	10
87	6.51	31.80	13.80	0.0	18.0	300	10	10

300, to 100, to 500 ksi, respectively) are shown in tables 4 and 5. According to the AASHTO design procedure, all these seven pavements-sections are suppose to carry the same amount of traffic of 20,000,000 18-kips ESAL, all supported by the same roadbed soil, and all should have a performance period of 20 years. Hence, the amount of damage delivered to each pavement-section during the performance period is the same and the three pavements receive the same level of protection.

Based upon the above observation, an engineering evaluation criterion was formulated. The criterion can be summarized as follows:

Since for the same roadbed soil and traffic volume, the AASHTO design procedure produces pavement sections that receive the same level of protection against damage due to traffic, then the magnitudes of the deflections, stresses, and strains induced in these pavement-sections due to an 18-kips ESAL must be the same. Otherwise, the level of protection is different and the three pavements will not have an equal performance period of 20 years.

The above criterion assumes that the induced levels of deflection, stresses, and strains induced in a pavement section due to traffic load are indicators of the damage received by that pavement. This assumption is reasonable because of several reasons including:

1. The shape of the pavement deflection basin is a function of the pavement peak deflection and the ability of the pavement section to spread the load to the lower layers. Higher peak deflections and steeper deflection basins imply that the delivered energy is concentrated under the wheel load and thus, more damage is delivered to that area.
2. For a given modulus value, higher stresses and strains induced in a pavement section cause higher damage. This should not be interpreted as the modulus of a material is a measure of its strength. Rather, it simply means that higher stress cause higher total strains. If the strain is totally recoverable (elastic), then no strain energy will be available to do the damage. Unfortunately, for most pavement materials, higher total strain causes higher plastic (permanent strain) which manifest itself as rutting and/or fatigue cracking.

3.3.3 Evaluation of the AASHTO Design Equations

As stated in chapter 2 of this report, the 243 pavement sections were analyzed by using the linear option of the MICHPAVE computer program. It should be noted that, although the MICHPAVE program is a finite element-based program, the accuracy of the outputs (stresses, strains, and deflections) of its linear option is better than 99.5 percent when

Table 4. Layer thicknesses and moduli of the pavement sections of cells 141, 150, and 159 of figure 1 (effective resilient modulus of the roadbed soil of 5 ksi, performance period of 20 years, and 20,000,000 18-kips ESAL).

Cell Number	Structural Number	Total Thickness (inch)	Layer Thicknesses (inches)			Layer Modulus (ksi)		
			AC	Base	Subbase	AC	Base	Subbase
141	6.51	38.5	8.41	12.09	18.0	300	40	10
150	6.51	34.09	8.41	8.18	17.50	300	40	15
159	6.51	28.87	8.41	3.66	16.80	300	40	25

Table 5. Layer thicknesses and moduli of the pavement sections of cells 141, 60, and 222 of figure 1 (effective resilient modulus of the roadbed soil of 5 ksi, performance period of 20 years, and 20,000,000 18-kips ESAL).

Cell Number	Structural Number	Total Thickness (inch)	Layer Thicknesses (inches)			Layer Modulus (ksi)		
			AC	Base	Subbase	AC	Base	Subbase
141	6.51	38.5	8.41	12.09	18.0	300	40	10
60	6.51	47.84	17.75	12.09	18.0	100	40	10
222	6.51	37.03	6.94	12.09	18.0	500	40	10

compared with the outputs of a closed form solution. Nevertheless, the mechanistic responses of the 243 pavement sections are provided in the matrices of figures 7 through 14. Tables 6, 7, and 8 summarize the mechanistic responses of the pavement sections of cells 141, 114, 87, 150, 159, 60 and 222 due to an 18-kip ESAL. These pavement sections are the same as those of tables 3, 4, and 5. Examination of these mechanical responses indicate that the magnitudes of deflections, stresses, and strains (amount of damage) delivered to each pavement section due to one 18-kip ESAL are different. Hence, the service lives of these sections are not the same. The implication of this is that the results of the mechanistic analysis do not support the AASHTO design premises that the three pavements are designed to receive an equal amount of damage during their service lives.

In reference to pavement sections 141, 114, and 87, examination of the values of layer moduli and thicknesses (see table 3) indicates that:

1. The only difference in the material properties between the three sections is the resilient modulus of the base material, it decreases from 40 to 25 and to 10 ksi for sections 141, 114, and 87, respectively.
2. The AASHTO produced structural number for the three pavement sections is the same and is equal to 6.51.
3. The AASHTO produced subbase thickness for the three pavement sections is the same and is equal to 18 inches.
4. The thickness of the AC layer increases from 8.41 to 10.04 and to 13.80 inches as the modulus of the base material decreases from 40 to 25 and to 10 ksi.
5. The thickness of the base decreases from 12.09 to 11.94 and to 0.0 inches as the modulus of the base decreases from 40 to 25 and to 10 ksi. Note that, for the case of 10 ksi base material where its modulus is the same as the subbase material, the AASHTO design procedure eliminates the base layer and provides much thicker AC course which is reasonable.

Examination of the mechanistic responses of the same three pavement sections (see table 6) and the AASHTO produced layer thicknesses (see table 3) indicates that decreasing the modulus value of the base material causes an increase in the thickness of the AC layer and a decrease in the thickness of the base material. These AASHTO resulting changes in the layer thicknesses precipitate the following changes in the mechanistic responses:

1. As the modulus of the base material increases from 10 to 25 and to 40 psi, the pavement peak surface deflection (see figure 18) increases. This implies that the total damage delivered to the three pavement sections due to an 18-kip ESAL is not the same or their levels of protection are different.

Table 6. Mechanistic responses of the pavement sections of cells 141, 114, and 87 of figure 1 due to an 18-kips ESAL.

Cell Number	Deflection at the Top of (mills)				Vertical Compressive Stress at the Top of (psi)				Vertical strain at top/bottom of layers (10^{-4} inch/inch)				Tensile Stress at the Bottom of the AC layer (psi)
	AC	Base	Subbase	Roadbed	Base	Subbase	Roadbed		AC	Base	Subbase	Roadbed	
141	21.26	20.13	17.10	13.25	15.91	2.88	1.01		0.30/0.81	4.26/1.98	3.24/1.67	2.01	64.10
114	20.87	19.57	16.54	13.02	9.39	2.52	0.97		0.42/1.60	4.06/1.95	2.82/1.59	1.91	64.54
87	19.64	N/A	18.03	14.30	N/A	3.20	1.12		0.68/1.15	N/A	3.15/1.68	2.01	52.04

N/A = Not applicable, the AASHTO design produced zero thickness for this layer.

Table 7. Mechanistic responses of the pavement sections of cells 141, 150, and 159 of figure 1 due to an 18-kips ESAL.

Cell Number	Deflection at the Top of (mills)				Vertical Compressive Stress at the Top of (psi)				Vertical strain at top/bottom of layers (10^{-4} inch/inch)				Tensile Stress at the Bottom of the AC layer (psi)
	AC	Base	Subbase	Roadbed	Base	Subbase	Roadbed		AC	Base	Subbase	Roadbed	
141	21.26	20.13	17.10	13.25	15.91	2.88	1.02		0.30/1.81	4.26/1.98	3.24/1.67	2.01	64.10
150	21.70	20.58	18.22	14.37	15.25	4.58	1.21		0.26/1.84	4.21/2.38	3.48/1.81	2.40	66.58
159	21.83	20.71	19.43	15.66	14.84	8.59	1.46		0.25/1.86	4.17/3.09	3.77/1.95	2.83	68.47

Table 8. Mechanistic responses of the pavement sections of cells 141, 60, and 222 of figure 1 due to an 18-kips ESAL.

Cell Number	Deflection at the Top of (mills)				Vertical Compressive Stress at the Top of (psi)			Vertical strain at top/bottom of layers (10^{-4} inch/inch)				Tensile Stress at the Bottom of the AC layer (psi)
	AC	Base	Subbase	Roadbed	Base	Subbase	Roadbed	AC	Base	Subbase	Roadbed	
141	21.26	20.13	17.10	13.25	15.91	2.88	1.01	0.30/1.81	4.26/1.98	3.24/1.67	2.01	64.10
60	21.14	15.31	13.58	11.05	7.24	1.71	0.70	3.63/1.34	2.14/1.23	1.99/1.15	1.38	10.30
222	21.14	20.60	17.51	13.50	16.27	3.02	1.05	0.28/1.59	4.23/2.06	3.37/1.75	2.09	105.50

2. The peak deflections (see figure 18) and the vertical compressive stress at the top of the base, subbase, and roadbed soil vary from one pavement section to another. These variations are, for some pavement sections, favorable (provide better protection of the layer in question) and unfavorable for other sections.
3. The tensile stress (see the last column of table 6) at the bottom of the AC decreases from 64.10 to 52.04 psi which implies (since the modulus of the AC is constant) the tensile strain decreases and the level of protection against fatigue cracking of the AC increases.
4. The vertical compressive strain at the top of each pavement layer and at the top of the subgrade varies from one pavement section to another (see figure 19). Again, this implies that the three pavement sections have various levels of protection against traffic load.

In reference to pavement sections 141, 150, and 159, examination of the values of layer moduli and thicknesses (see table 4) indicates that:

1. The only difference in the material properties between the three sections is the resilient modulus of the subbase material, it increases from 10 to 15 and to 25 ksi for sections 141, 150, and 159, respectively.
2. The AASHTO design procedure produced structural number for the three pavement sections is the same and is equal to 6.51.
3. The AASHTO design method produced AC thickness for the three pavement sections is the same and is equal to 8.41 inches.
4. The thickness of the base layer decreases from 12.09 to 8.18 and to 3.66 inches as the modulus of the subbase material increases from 10 to 15 and to 25 ksi, respectively.
5. The thickness of the subbase layer decreases from 18.0 to 17.5 and to 16.8 inches as the modulus of the subbase layer increases from 10 to 15 and to 25 ksi, respectively.

Examination of the mechanistic responses of the same three pavement sections (see table 7) and the AASHTO design method produced layer thicknesses (see table 3) indicates that decreasing the modulus value of the subbase material causes a decrease in the thickness of the base and subbase layers. These AASHTO design method resulting changes in the layer thicknesses precipitate the following changes in the mechanistic responses:

1. The pavement peak surface deflection is almost constant which imply that the level of the overall damage delivered to the three pavements is almost the same. However, the amount of compression in the base (the difference between the peak deflections at the top of the base and subbase layers of figure 20) vary from one pavement section to another. These variations, for some pavement sections, are favorable (provide a better protection of the layer in question from damages such as rutting) and unfavorable for other sections.

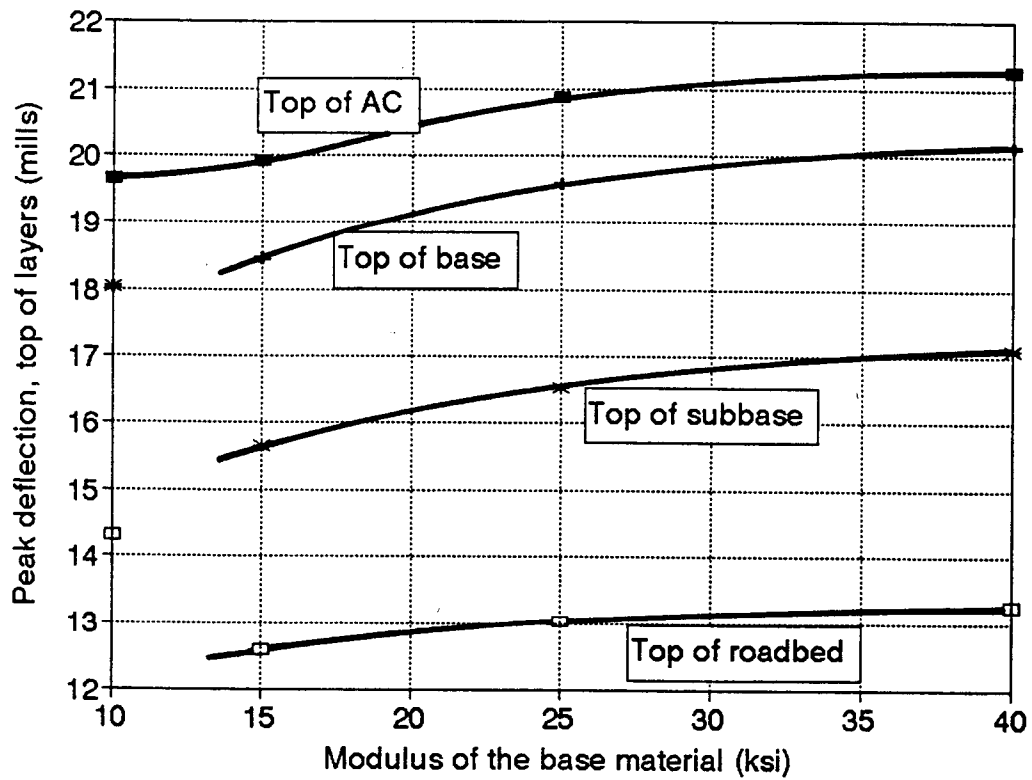


Figure 18. Peak deflections at the top of each pavement layer of sections 141, 114, and 87.

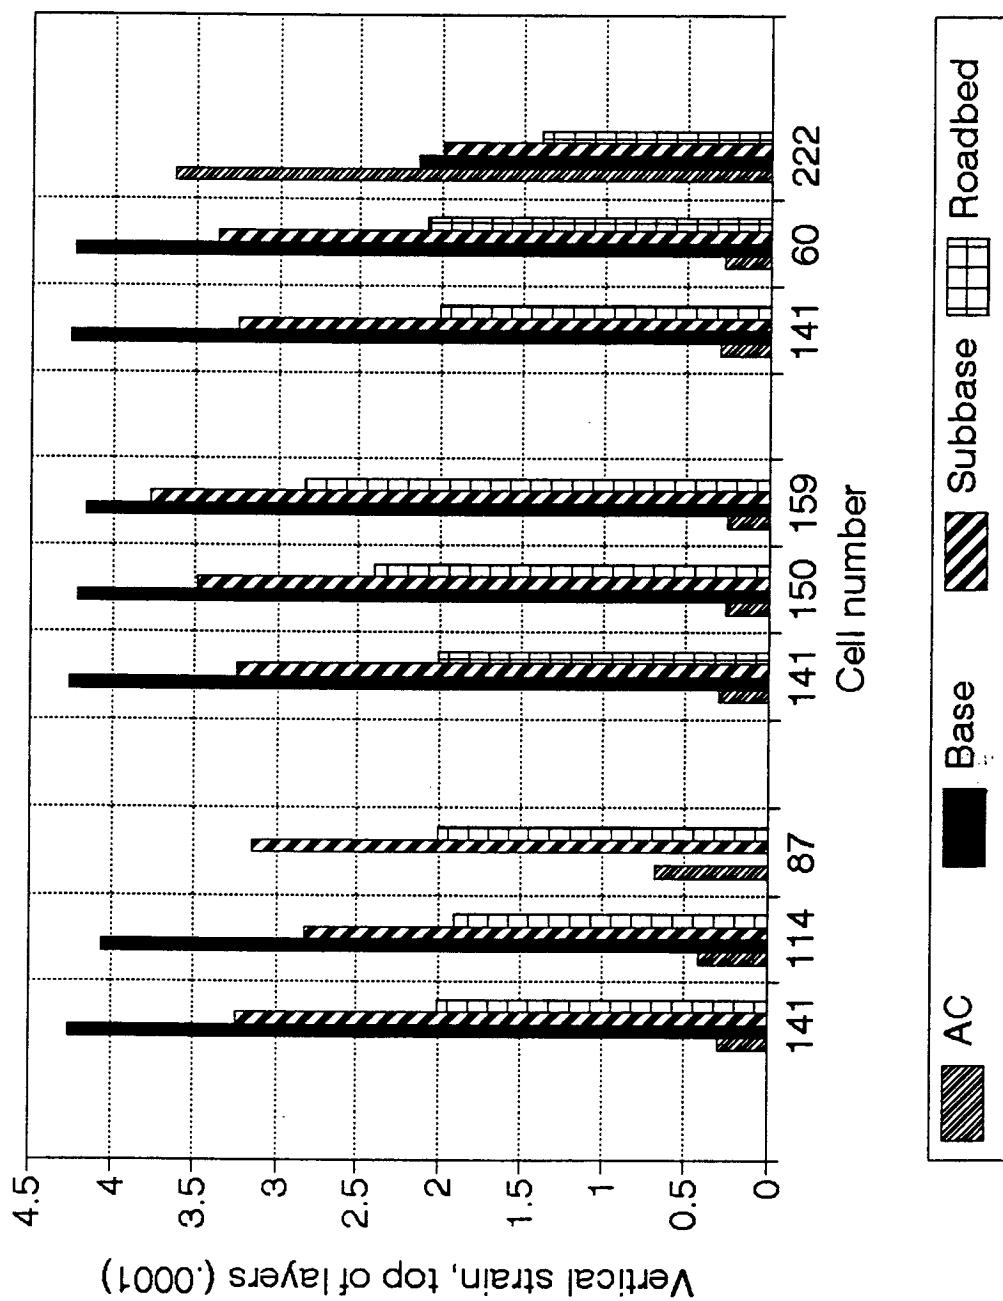


Figure 19. Vertical compressive strains at the top of each pavement layer and at the top of the roadbed soil for sections 60, 87, 114, 141, 150, 159, and 222.

2. As shown in figure 20, the peak deflections at the top of the base, subbase, and roadbed soil increase as the subbase modulus increases from 10 to 25 ksi.
3. The tensile stress (see the last column of table 7) at the bottom of the AC increases from 64.10 to 68.47 psi which implies that (since the modulus of the AC is constant) the level of protection against fatigue cracking of the AC decreases. That is the AC surface of pavement section 159 is more prone to fatigue cracking than that of section 141.
4. The vertical compressive strain at the top of each pavement layer and at the top of the subgrade varies from one pavement section to another (see figure 18). Again, this implies that the three pavement sections have various levels of protection against traffic load.

Similarly, table 4 summarizes the values of the moduli, the AASHTO design method produced layer thicknesses, the total thickness, and the structural numbers of pavement sections 141, 60, and 222. Examination of these values indicates that:

1. The only difference in the material properties between the three sections is the resilient modulus of the AC, it varies from 100 to 300 and to 500 ksi for sections 60, 141, and 222, respectively.
2. The AASHTO produced structural number for the three pavement sections is the same and is equal to 6.51.
3. The AASHTO produced AC thicknesses for sections 60, 141, and 222 are 17.75, 8.41, and 6.94 inches, respectively.

Examination of the mechanistic responses of the same three pavement sections (see table 8) and the AASHTO produced layer thicknesses (see table 5) indicates that decreasing the modulus value of the AC causes a decrease in the AC thickness. This change precipitated the following changes in the mechanistic responses of the three sections:

1. The pavement peak surface deflection remains almost constant at about 21.26 mil. This may imply that the damage delivered to the pavement system due to an 18-kips ESAL is the same. Stated differently, the AASHTO thickness design procedure provides an equal protection against traffic to all three sections.
2. As shown in figure 21, the peak deflections at the top of the base, subbase, and roadbed soil increase as the AC modulus increases and the AC thickness decreases. Further, the amount of compression (the difference between the peak deflections at the top of the base and subbase layers) in the base layer increases from 1.73 mil for section 60 to 3.09 mil for section 222 (an increase of about 79%). Once again, this implies that the three sections do not have the same level of protection against damage.

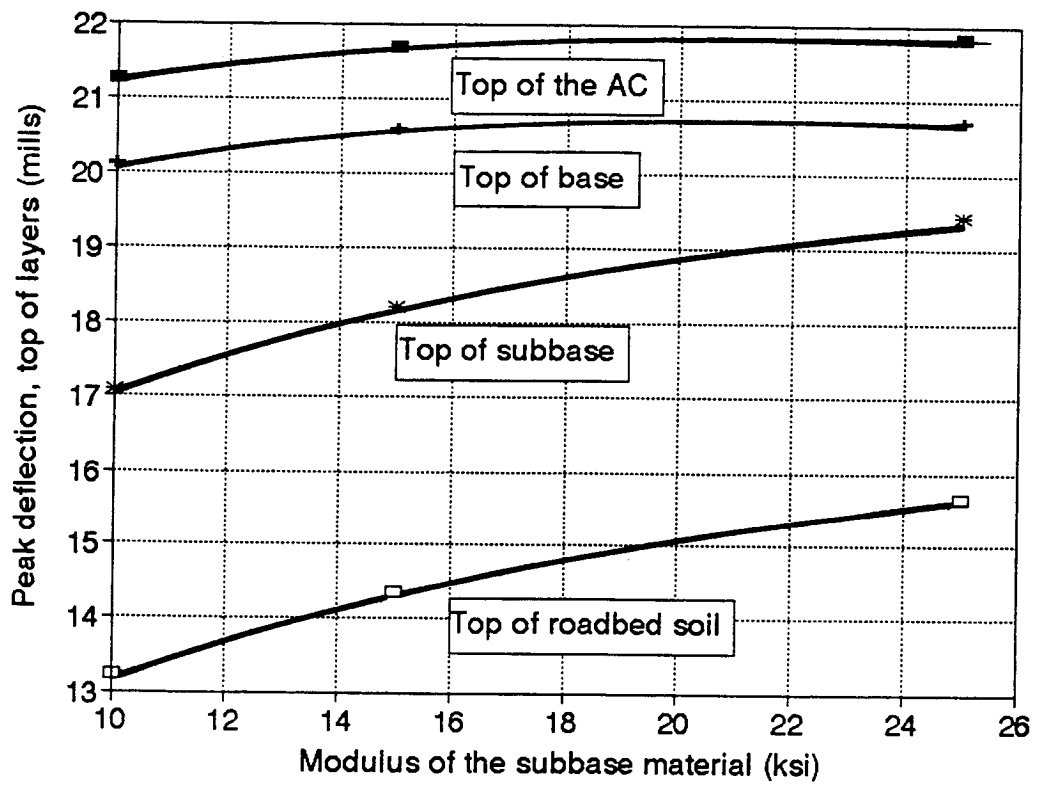


Figure 20. Peak deflections at the top of each pavement layer of sections 141, 150, and 159.

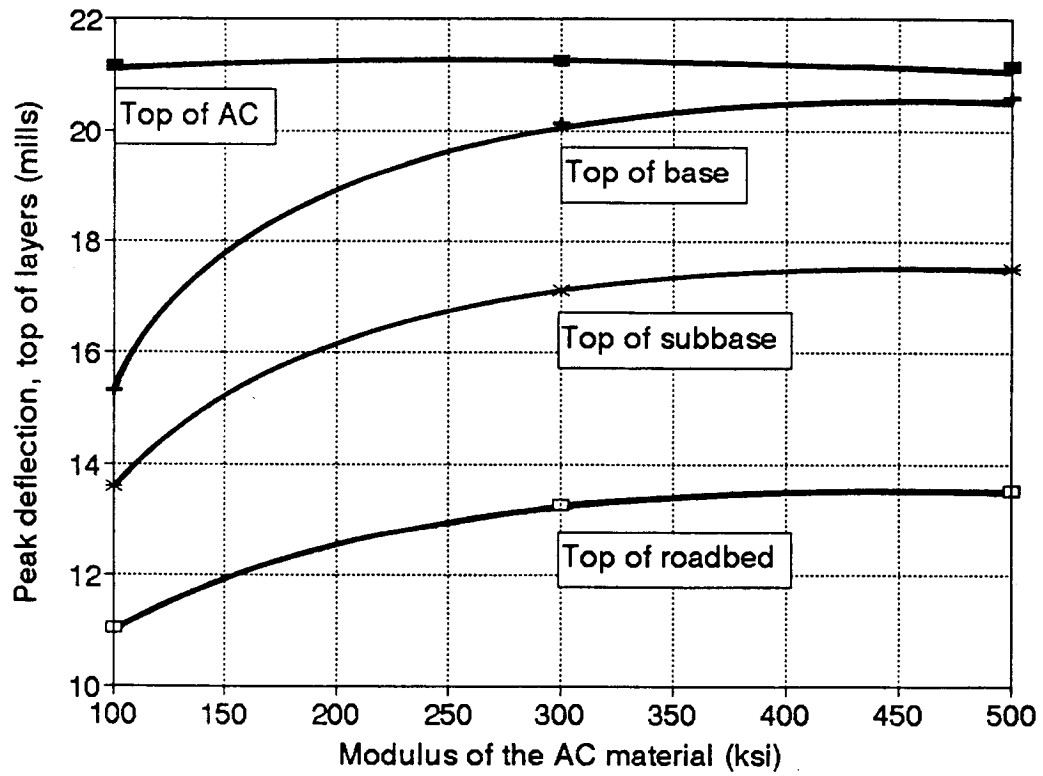


Figure 21. Peak deflections at the top of each pavement layer of sections 60, 141, and 222.

3. The amount of deflection (see figure 21) at the top of the roadbed soil increases from 11.05 mil for section 60 to 13.5 mil for section 222. The implication of this is that the rut potential of the roadbed soil of section 60 is lower than that of section 222.
4. The vertical compressive strain at the top of each pavement layer and at the top of the subgrade varies from one pavement section to another (see figure 18). Again, this implies that the three pavement sections have various levels of protection against traffic load.
5. The tensile stress at the bottom of the AC increases from 10.30 to 64.10 and to 105.5 psi for sections 60, 141, and 222, respectively. Although, the modulus of the AC increases from 100 ksi for section 60 to 500 ksi for section 222 (an increase of 5 fold), the corresponding tensile strength increases by a factor of about 10. One can also use equation 1.3 (repeated herein for convenience) to calculate the tensile strength of the AC mix as follows:

$$\ln(MR) = 7.3667 + 1.08335[\ln(INTS)] + 0.14(AV) + 0.00034(L) \quad (\text{Eq. 1.3})$$

The use of the above equation requires that the values of the percent air voids and the applied effective average load (at the middle of the AC layer) be assumed, since such data are not available in the databank. However, the equation can be used to assess the relative increase and decrease of the indirect tensile strength (INTS) due to an increase or decrease in the value of the resilient modulus (MR). Hence, rearranging the above equation yields:

$$(INTS)^{1.08335} = [e^{-7.3667}][MR][e^{-0.14(AV)}][e^{0.00034(L)}]$$

As it can be seen, the value of the INTS can be calculated as the product of four terms. For pavement section numbers 60 and 141 with the respective resilient moduli of the AC of 100,000 and 500,000 psi, the resilient modulus term of the last equation is equal to 100,000 and 500,000, respectively. That is, if one assumes that the indirect tensile strength of the 500,000 psi AC material (section 222) represents a unit strength, then the indirect tensile strength of the 100,000 psi AC material (section 60) is equal to 0.2 unit strength. Likewise, the unit strength of the 300,000 psi material (section 141) is 0.6 unit strength. Further, assuming that the unit tensile strength is equal to 300 psi (a reasonable value for the 500,000 psi material), it yields that the tensile strengths for the 300,000 and 100,000 psi materials are 180, and 60 psi, respectively. These tensile strength values, the section number, the resilient moduli, the tensile stresses at the bottom of the AC, and the tensile stress-tensile strength ratio are tabulated below for the three pavement sections. It can be seen that the AC layer in section 60 is subjected to the lowest stress/strength ratio. Since fatigue life is proportional to this ratio (the higher the stress ratio, the lower the fatigue life), it implies that the fatigue cracking potentials of the three pavement sections are not the same.

Section number	Resilient modulus (psi)	Tensile strength (psi)	Tensile stress (psi)	Stress ratio (%)
60	100,000	60	10.3	17.17
141	300,000	180	64.1	35.61
222	500,000	300	105.5	35.17

3.4 Conclusions of the Mechanistic Evaluation of the AASHTO Design Equations

Table 9 summarizes the AASHTO and the mechanistic response outputs of the seven pavement sections discussed in the previous section. Based on the data presented in the table, and on the range of the material properties used in this study, the following conclusions are drawn:

1. Based on the pavement surface peak deflection data listed in table 9 and shown in figure 22 and on the assumption that the peak surface deflection can be used as a measure of the level of damage delivered to a pavement section (higher deflection causes higher compression and higher rut and/or fatigue cracking potential), one can conclude that:

For a constant traffic level and one type of roadbed soil, the AASHTO design procedure produces pavement sections (layer thicknesses) such that the peak surface deflection is constant. Hence, the amount of the overall damage delivered to the pavement section (or the overall protection level) is constant and independent of the material properties.

2. Based on the amount of vertical compression (the difference between the peak deflections at the top of any two consecutive layers) experienced by each pavement layer (see figures 23 through 26, and the resulting vertical strains at the top and bottom of each pavement layer (see figures 27 and 28), the following conclusion is drawn:

For a constant traffic level and one type of roadbed soil, the AASHTO design procedure produces pavement sections (layer thicknesses) such that the amount of compression and the resulting compressive strain experienced by any one layer vary from one section to another. Hence, the amount of damage delivered to each layer of the pavement sections (or the level of protection) varies. This implies that while the AASHTO design procedure insures that the overall damage of the pavement sections is the same, the relative damage delivered to each layer is not.

Table 9. The outputs of the AASHTO design method and the mechanistic responses of pavement sections 60, 87, 141, 114, 150, 159, and 222.

Section Number	Layer thicknesses (in)			Layer moduli (ksi)				Deflection (mills) at top of				Amount of compression (mill)				
	AC	Base	Subbas	AC	Base	Subba	Roadbed	AC	Base	Subba	Roadb	AC	Base	Subba	Roadbe	
60	17.75	12.09	18.00	100	40	10	5	21.14	15.31	13.58	11.05	5.83	1.73	2.53	11.05	
141	8.41	12.09	18.00	300	40	10	5	21.26	20.13	17.10	13.25	1.13	3.03	3.85	13.25	
222	6.94	12.09	18.00	500	40	10	5	21.14	20.60	17.51	13.50	0.54	3.09	4.01	13.5	
87	13.80	0.00	18.00	300	10	10	5	19.64	18.03	18.03	14.30	1.61	0.00	3.73	14.3	
114	10.04	11.94	18.00	300	25	10	5	20.87	19.57	16.54	13.02	1.3	3.03	3.52	13.02	
141	8.41	12.09	18.00	300	40	10	5	21.26	20.13	17.10	13.25	1.13	3.03	3.85	13.25	
141	8.41	12.09	18.00	300	40	10	5	21.26	20.13	17.10	13.25	1.13	3.03	3.85	13.25	
141	8.41	12.09	18.00	300	40	10	5	21.26	20.13	17.10	13.25	1.13	3.03	3.85	13.25	
150	8.41	8.18	17.50	300	40	15	5	21.70	20.58	18.22	14.37	1.12	2.36	3.85	14.37	
159	8.41	3.66	16.8	300	40	25	5	21.83	20.71	19.43	15.66	1.12	1.28	3.77	15.66	
156	8.41	3.66	40.40	300	40	25	1	35.19	34.07	32.79	27.00	1.12	1.28	5.79	27.00	
159	8.41	3.66	16.80	300	40	25	5	21.83	20.71	19.43	15.66	1.12	1.28	3.77	15.66	
162	8.41	3.66	8.96	300	40	25	10	16.93	15.79	14.52	12.03	1.14	1.27	2.49	12.03	
Section Number	Layer thicknesses, inch			Vertical stress (psi) at top of			Tensile stress bottom of AC		Vertical strain top and bottom (0.0001 in/in)							
	AC	Base	Subbas	Base	Subbas	Roadb	Stress (psi)	Stress ratio*	AC		Base		Subbase		Roadbe	
									Top	Bottom	Top	Bottom	Top	Bottom	Top	
60	17.75	12.09	18.00	7.24	1.71	0.70	10.30	0.10	3.63	1.34	2.14	1.23	1.99	1.15	1.38	
141	8.41	12.09	18.00	15.91	2.88	1.01	64.10	0.21	0.30	1.81	4.26	1.98	3.24	1.67	2.01	
222	6.94	12.09	18.00	16.27	3.02	1.05	105.50	0.21	0.28	1.59	4.23	2.06	3.37	1.75	2.09	
87	13.80	0.00	18.00	3.20	3.20	1.12	52.04	0.17	0.68	1.15	-	-	3.15	1.68	2.01	
114	10.04	11.94	18.00	9.39	2.52	0.97	64.54	0.22	0.42	1.60	4.06	1.95	2.82	1.59	1.91	
141	8.41	12.09	18.00	15.91	2.88	1.01	64.10	0.21	0.30	1.81	4.26	1.98	3.24	1.67	2.01	
141	8.41	12.09	18.00	15.91	2.88	1.01	64.10	0.21	0.30	1.81	4.26	1.98	3.24	1.67	2.01	
150	8.41	8.18	17.50	15.25	4.58	1.21	66.58	0.22	0.26	1.84	4.21	2.38	3.48	1.81	2.40	
159	8.41	3.66	16.8	14.71	8.59	1.46	68.47	0.23	0.25	1.86	4.17	3.09	3.77	1.95	2.83	
156	8.41	3.66	40.40	15.34	9.44	0.20	64.05	0.21	0.31	1.79	4.16	3.11	3.79	1.09	1.82	
159	8.41	3.66	16.80	14.71	8.59	1.46	68.47	0.23	0.25	1.86	4.17	3.09	3.77	1.95	2.83	
162	8.41	3.66	8.96	14.38	8.23	3.25	69.81	0.23	0.27	1.88	4.15	3.07	3.75	2.46	3.14	

* Ratio of tensile stress to modulus

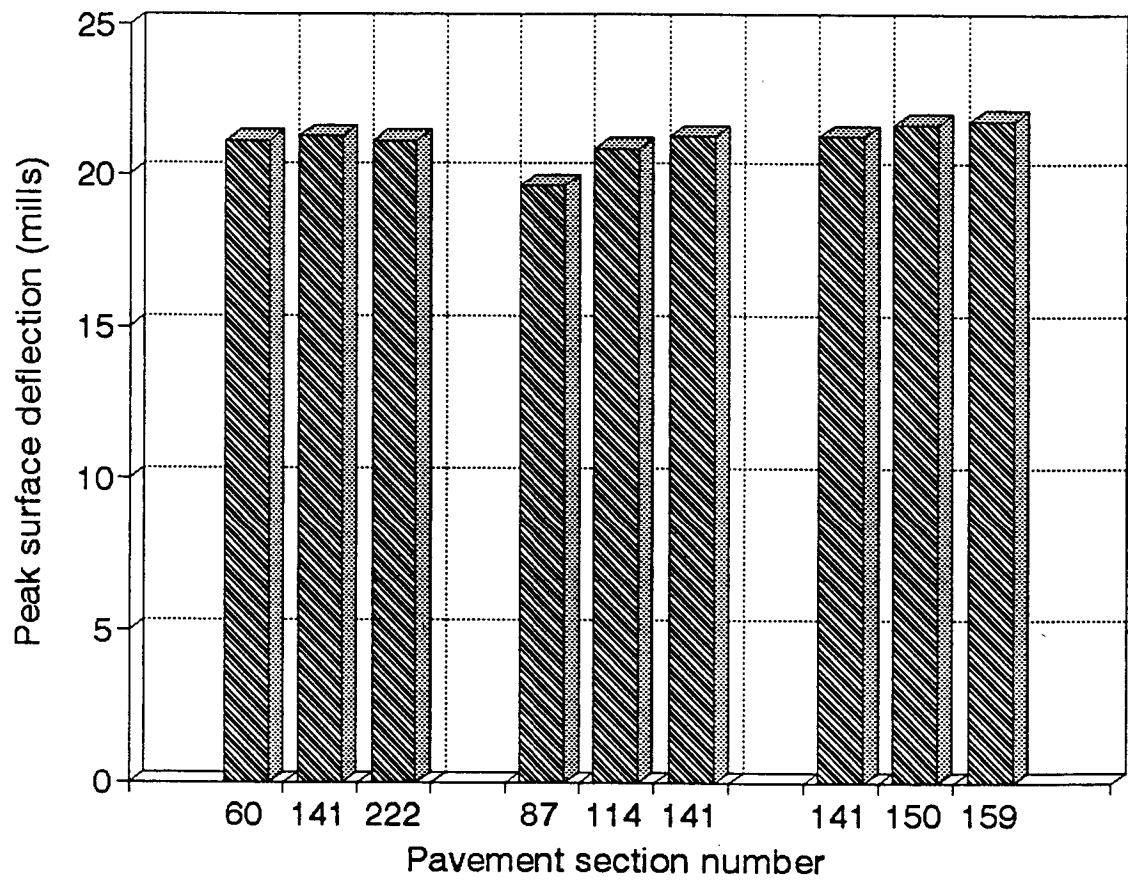


Figure 22. Peak pavement surface deflections of the seven indicated pavement sections.

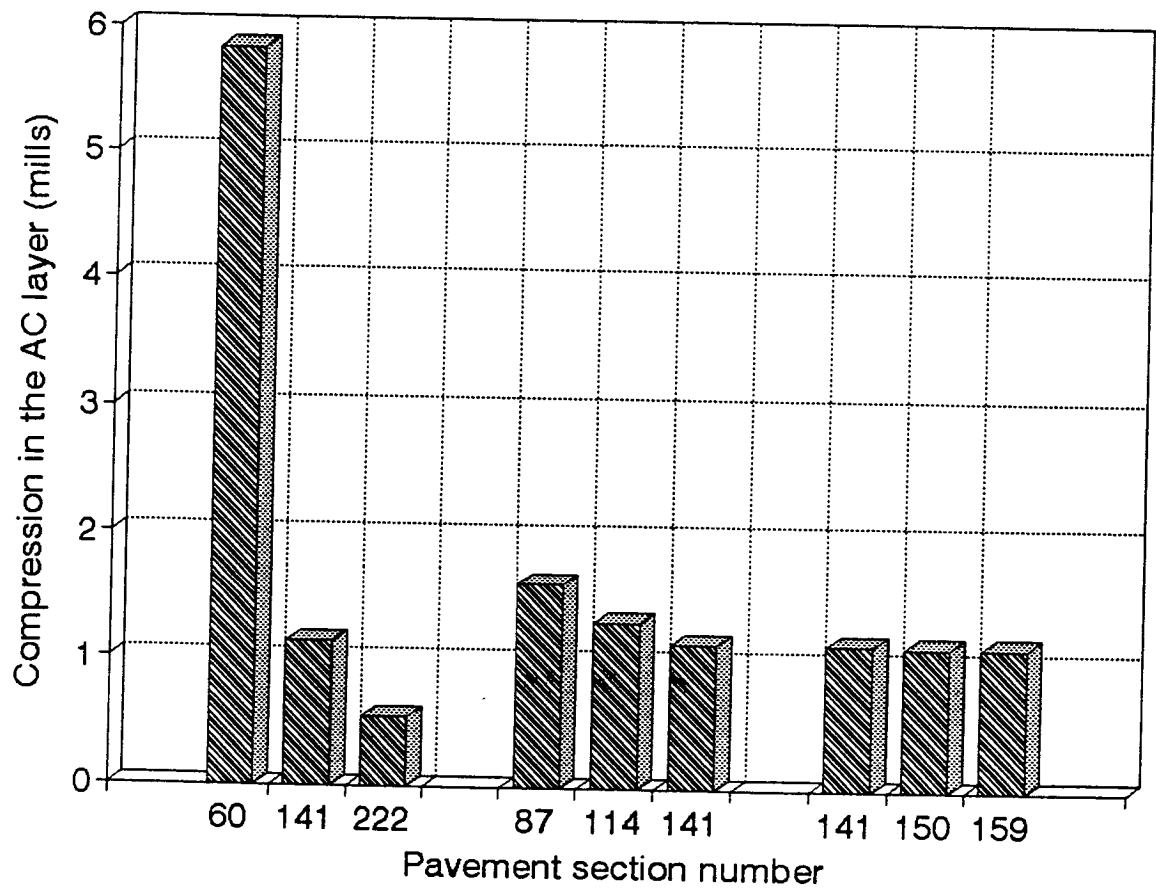


Figure 23. The amount of compression in the AC layer of the seven indicated pavement sections.

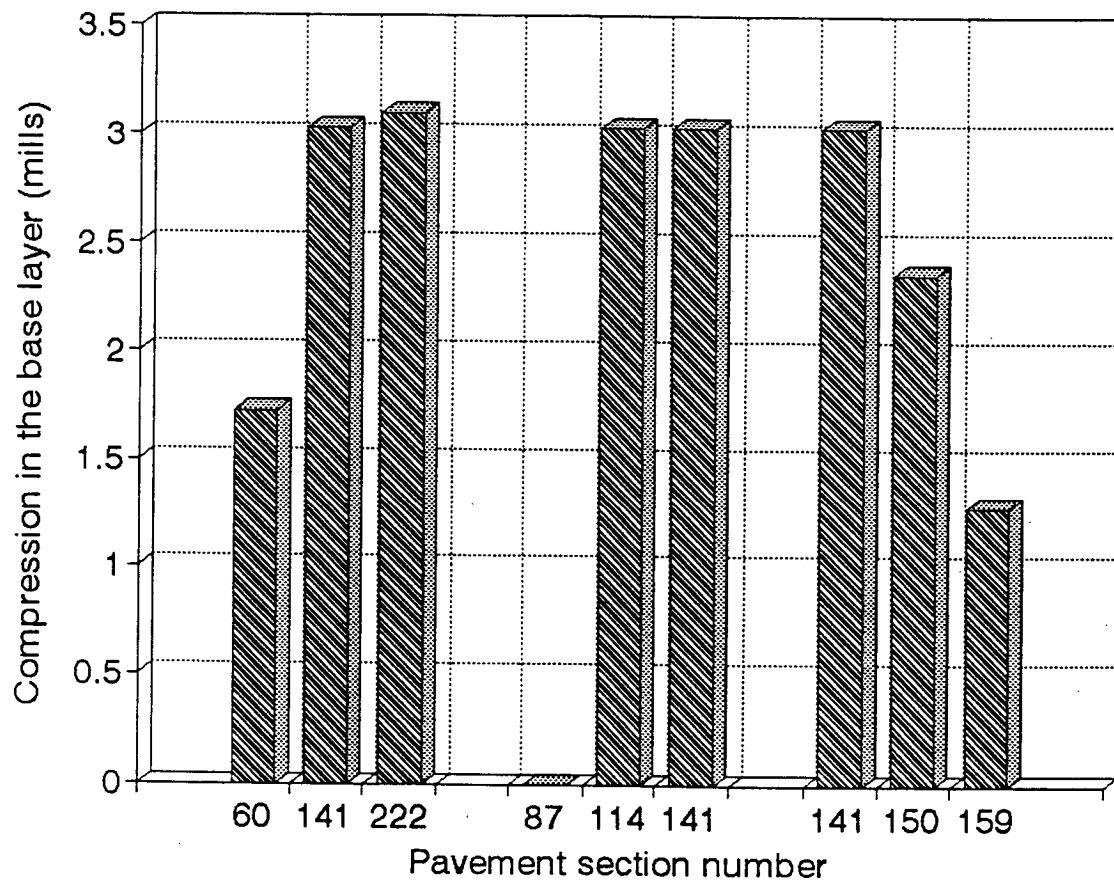


Figure 24. The amount of compression in the base layer of the seven indicated pavement sections.

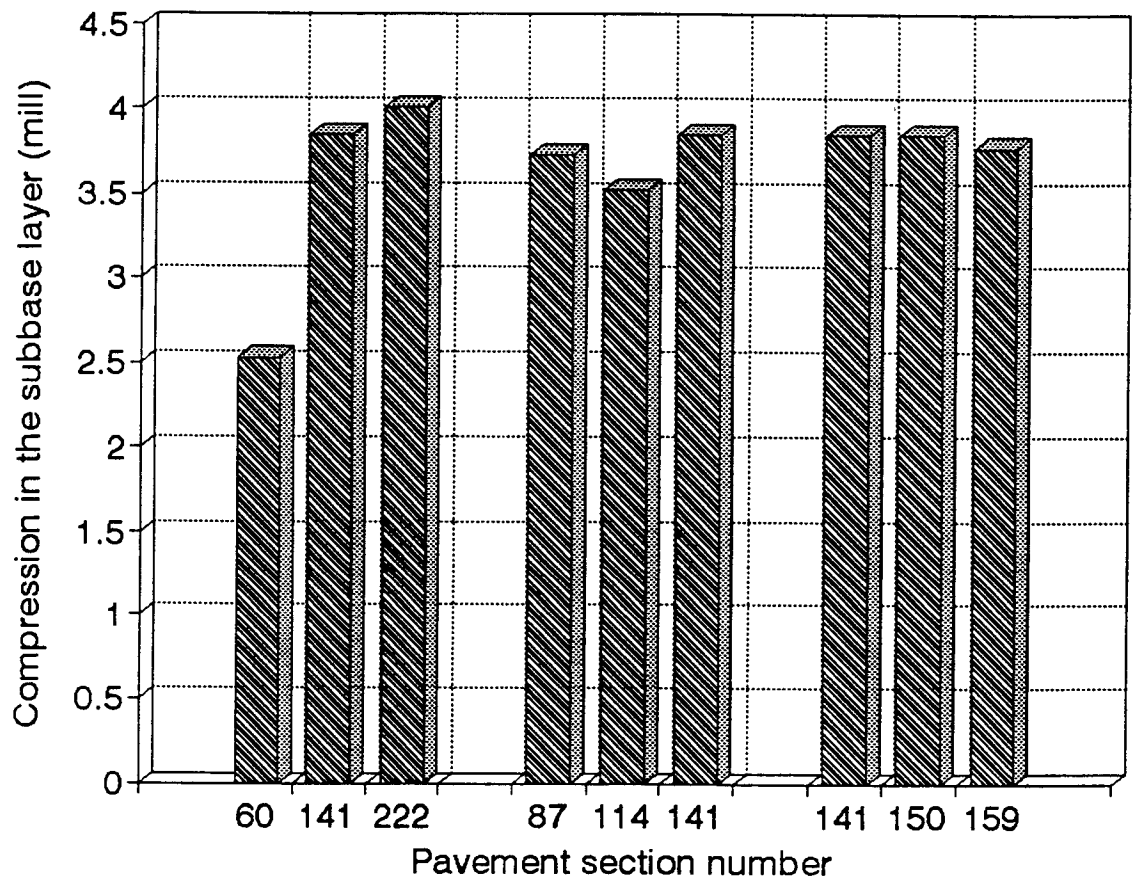


Figure 25. The amount of compression in the subbase layer of the seven indicated pavement sections.

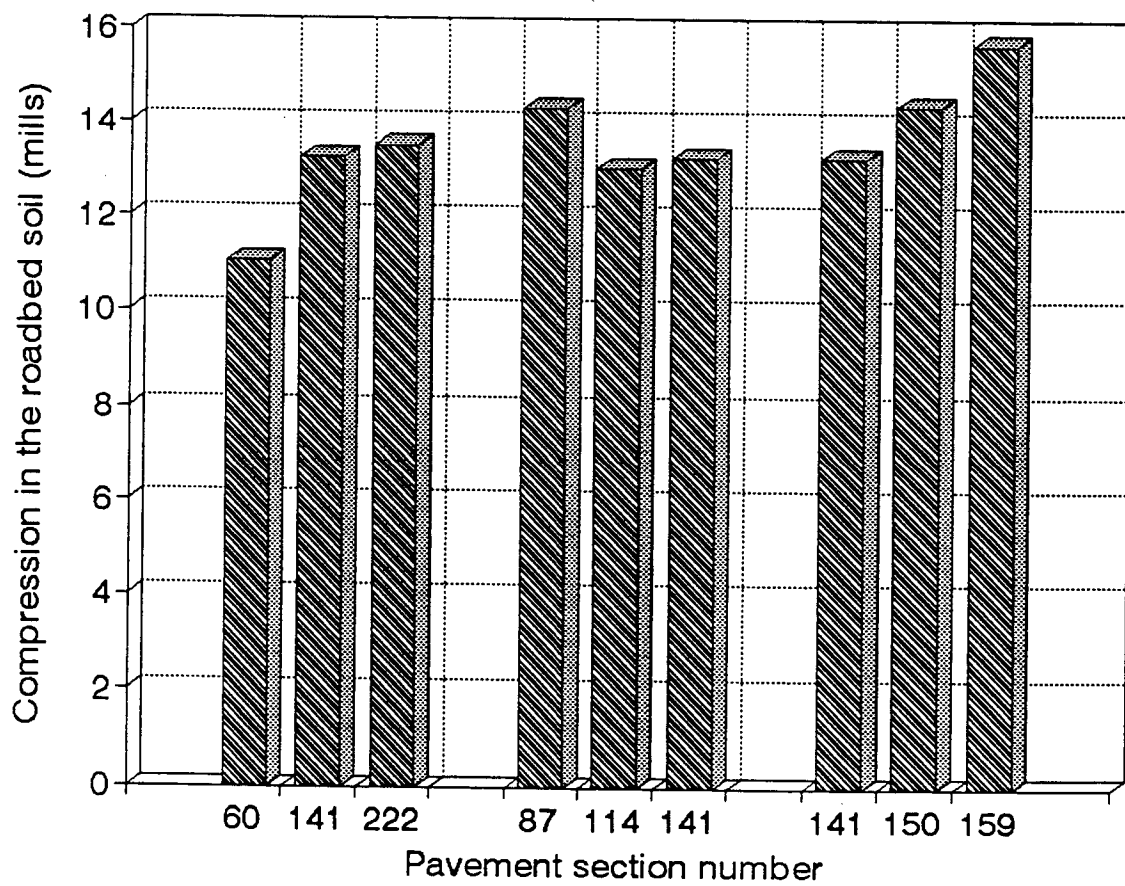


Figure 26. The amount of compression in the roadbed soil of the seven indicated pavement sections.

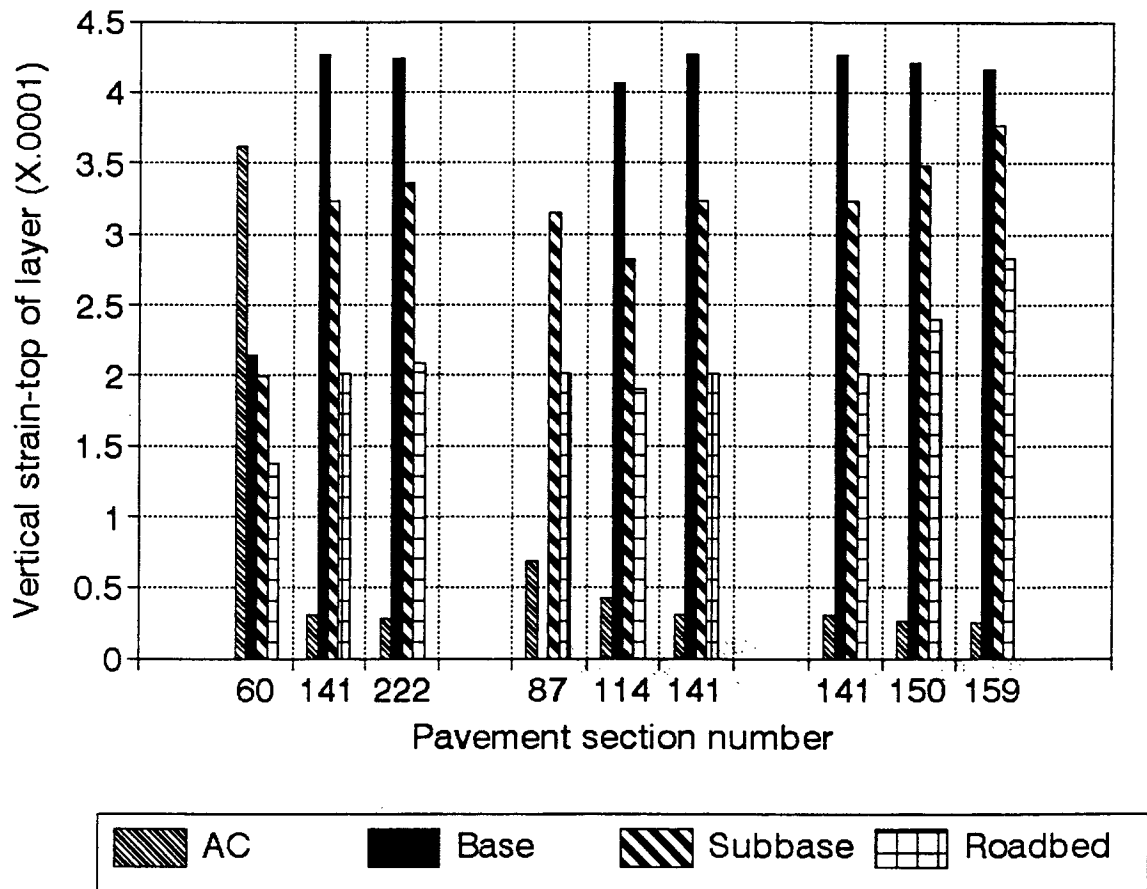


Figure 27. The vertical strains induced at the top of each pavement layer for the indicated pavement sections.

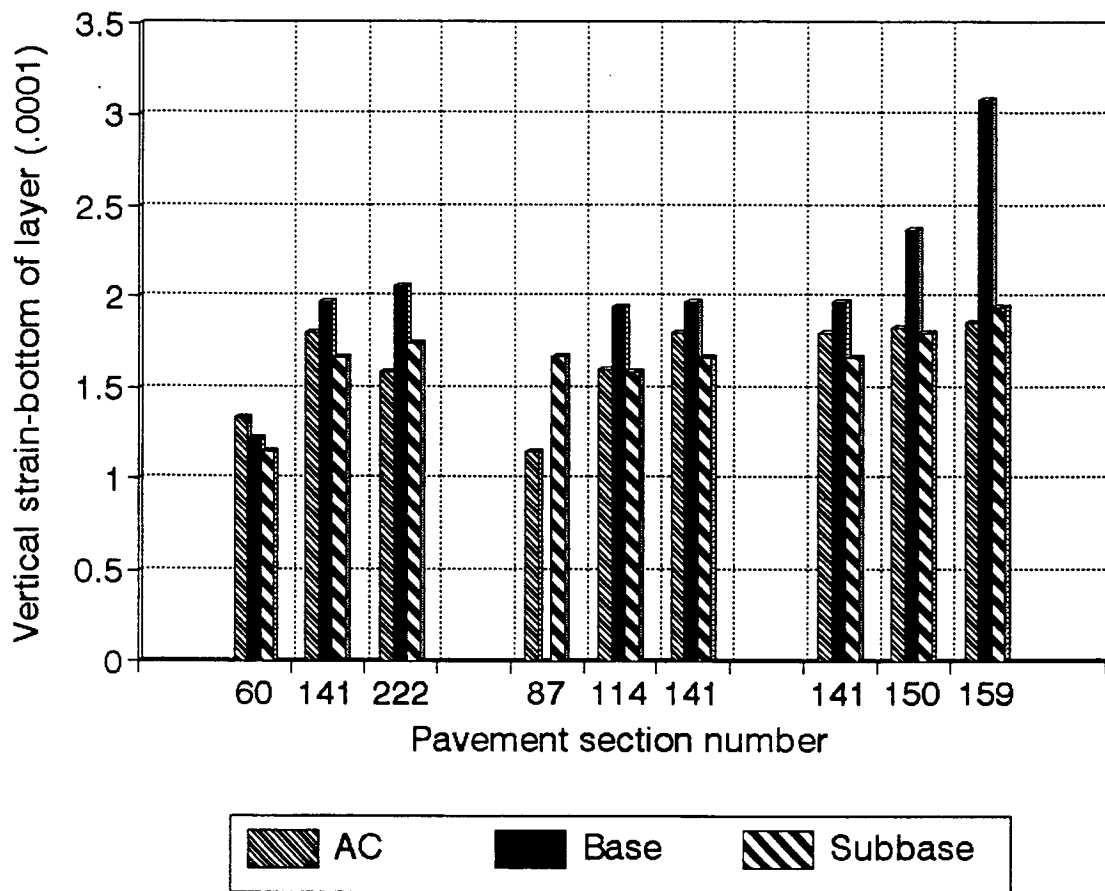


Figure 28. The vertical strain induced at the bottom of each pavement layer for the indicated pavement sections.

3. Based on the magnitude of the tensile stress induced at the bottom of the AC layer (of seven pavement sections) due to an 18-kips ESAL and the ratio of that tensile stress to the value of the AC modulus (see table 9 and figures 29 and 30), the following conclusion is drawn:

For a constant traffic level and one type of roadbed soil, the AASHTO design procedure produces pavement sections (layer thicknesses) such that the tensile stress induced at the bottom of the AC layer vary from one section to another. Hence, the amount of damage delivered to the AC layer of the pavement sections (or the level of protection) varies. This implies that while the AASHTO design procedure insures that the overall damage of the pavement sections is the same, the relative damage delivered to each layer is not.

It should be noted that the three conclusions stated above are strictly based upon the outputs (layer thicknesses) of the AASHTO flexible pavement design procedure and the outputs of the mechanistic analysis of the AASHTO designed pavement sections. Recall that the premises of the above analyses are:

1. The outputs of the mechanistic analysis of a pavement section reflect the true stresses and strains induced in that section.
2. The magnitudes of the stresses, strains, and deflections induced in a pavement section are measures of the amount of damage delivered to a pavement section.

Based upon these premises and the results of the analyses which led to the three conclusions stated above, several important aspects relative to the calibration of the AASHTO flexible design equations can be made. These are presented in the next sections.

3.5 Important Concepts Relative to the Calibration of the AASHTO Flexible Design Equations

Several important concepts related to the calibration of the AASHTO flexible design equations can be inferred from the mechanistic analysis of those equations. These concepts can be divided (according to the type of the AASHTO equation) into two categories: the concepts of the structural number, and the concept of the resilient modulus of the roadbed soil in the AASHTO main design equation. These two categories are presented in the next subsections.

3.5.1 The Concept of the AASHTO Structural Number

The AASHTO AN equation (note that the drainage coefficient is not included yet) can be written as follows:

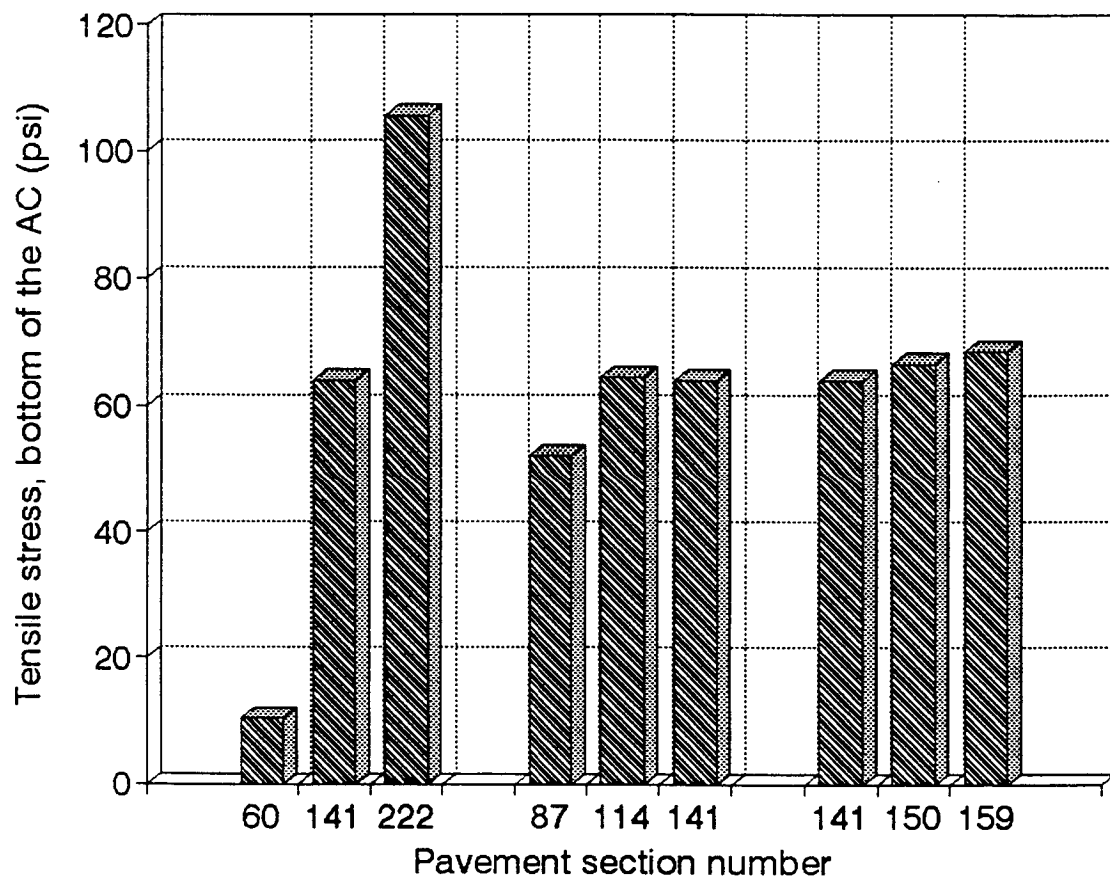


Figure 29. Tensile stress at the bottom of the AC layer of the seven indicated pavement sections.

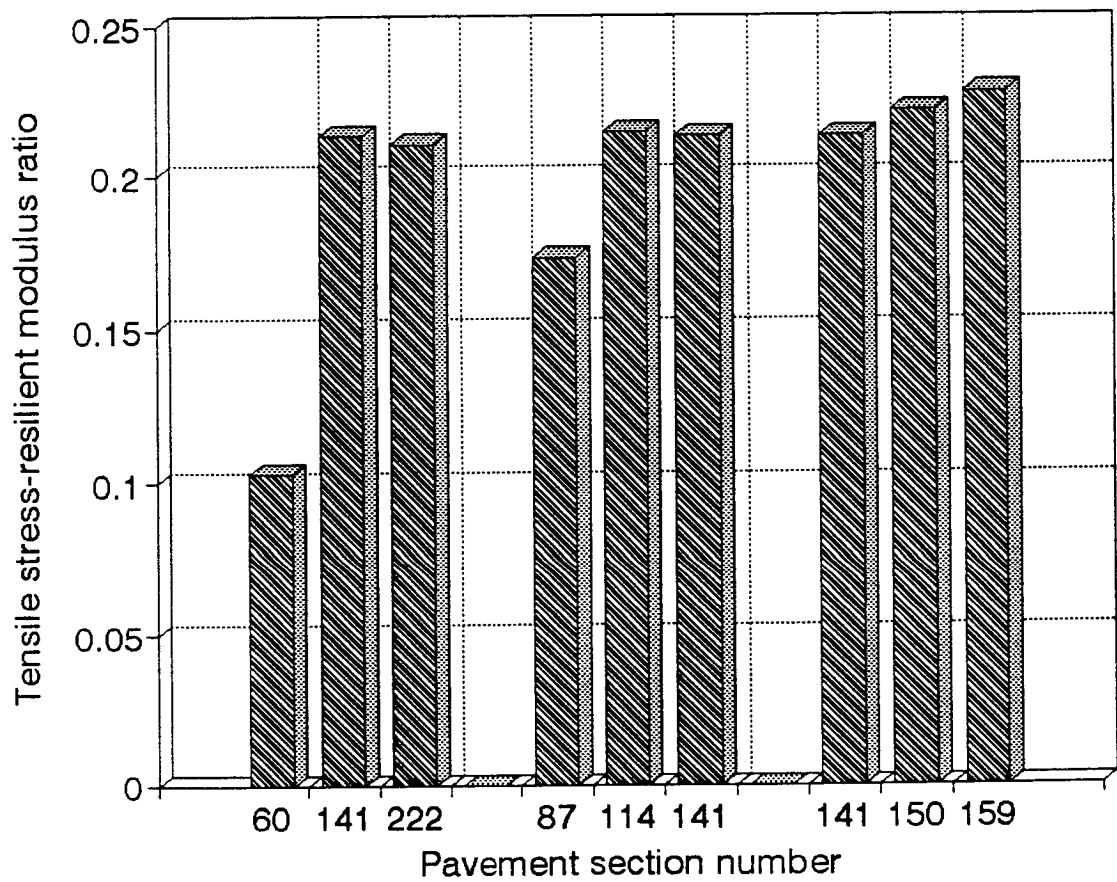


Figure 30. The ratio of the tensile stress at the bottom of the AC layer to its resilient modulus for the seven indicated pavement sections.

$SN = a_1D_1 + a_2D_2 + a_3D_3$ which can also be written as:

$$SN = SN_1 + SN_2 + SN_3$$

That is the structural number of a pavement section is the linear sum of the structural numbers of its layers. The following conclusions are made relative to this AASHTO concept.

STRUCTURAL NUMBER -AASHTO CONCEPT 1

The total structural number of any flexible pavement section is the sum of the structural numbers of its layers. The findings of the mechanistic analysis support this AASHTO concept.

The concept of the role of the layer coefficients as a function of the layers resilient moduli (see figure 31 for the AC resilient modulus values between 100,000 and 450,000 psi at 68 °, and the following base (a_2) and subbase (a_3) layer coefficient equations):

$$a_2 = 0.249[\text{Log}(E_{BS})] - 0.977; \text{ and } a_3 = 0.227[\text{Log}(E_{SB})] - 0.839$$

STRUCTURAL NUMBER - AASHTO CONCEPT 2

The structural number of any flexible pavement layer is the product of its thickness and its layer coefficient. For any layer, its coefficient can be obtained from the appropriate equation or chart based on the modulus value of that layer. The results of the mechanistic analysis do not support this AASHTO concept.

One of the reason of the above findings could be related to the nature of the AASHTO method and the nature of the analysis. That is the AASHTO method is based mainly on one type of distress, ride quality in terms of the PSI. The results of the mechanistic analyses are mainly based on rutting and fatigue cracking (load related distress). Hence, the calibration of the layer coefficient equations and/or chart depends upon two facets as follows:

1. The type of distress (damage) that is being considered. Stated differently, for any pavement layer, the value or values of its layer coefficients could be distress mode dependent. That is, as indicated by the results of the mechanistic analysis, the layer coefficient values to insure equal roughness (ride quality) are not necessarily the same as those to insure equal rutting and/or fatigue cracking.

2. For load related distress, the properties (layer coefficients) of all pavement layers and their interactions influence the mechanistic response of the pavement structure. The AASHTO procedure is based on equalizing the overall response of the pavement section in question.

5.3.2 The Concept of the AASHTO Main Design Equation.

The number of 18-kips ESAL (W_{18}) is a function of the design reliability (Z_R), the overall standard deviation (S_o) of the materials and traffic data, the structural number (SN) of the pavement section, the resilient modulus (M_R) of the roadbed soil, and the serviceability loss (ΔPSI) expected during the performance period. In practice, however, the number of 18-kips ESAL is used as an input to the equation and the required structural number is obtained.

$$\text{Log}(W_{18}) = (Z_R)(S_o) + 9.36[\text{Log}(\text{SN} + 1)] - 0.20 + \frac{\text{Log}[(\Delta PSI)/(4.2 - 1.5)]}{[0.4 + 1094/(\text{SN} + 1)^{5.19}]} + 2.32[\text{Log}(M_R)] - 8.07$$

THE CONCEPT OF THE AASHTO MAIN DESIGN EQUATION

The structural number of a pavement section is a function of only one material property, the resilient modulus of the roadbed soil. Pavement sections with different types of roadbed soil will have different structural numbers such that each section will receive the same amount of damage. The results of the mechanistic analysis do not support this AASHTO concept.

In reference to figure 1, pavement sections 156, 159, and 162 were designed by using the AASHTO flexible pavement design procedure. The material properties of the AC, base, and subbase layers for all three sections are the same. All sections were designed to carry 20,000,000 ESAL. The only difference between the three sections is the resilient modulus of the roadbed soil. It varies from 1 ksi for section 156 to 10 ksi for section 162. The outputs (layer thicknesses) of the AASHTO design procedure are listed in figures 2 through 6 and summarized, for convenience, in table 10. The mechanistic responses of the three sections are summarized in table 11. Examination of the mechanistic responses of sections 156, 159, and 162 listed in table 11 indicates that:

1. The peak pavement surface deflection varies from 35.19 mil for pavement section 156 to 16.93 mil for pavement section 162. Figure 32 depicts the peak deflection at the top of each pavement layer. It can be seen that the peak deflection at the top of each layer varies from one section to another which indicates that the amount of the overall damage received by one pavement section is different than that received by the other section. It should be noted that the variation in the peak deflection at the top of each layer is due mainly to the deflection at the top of the

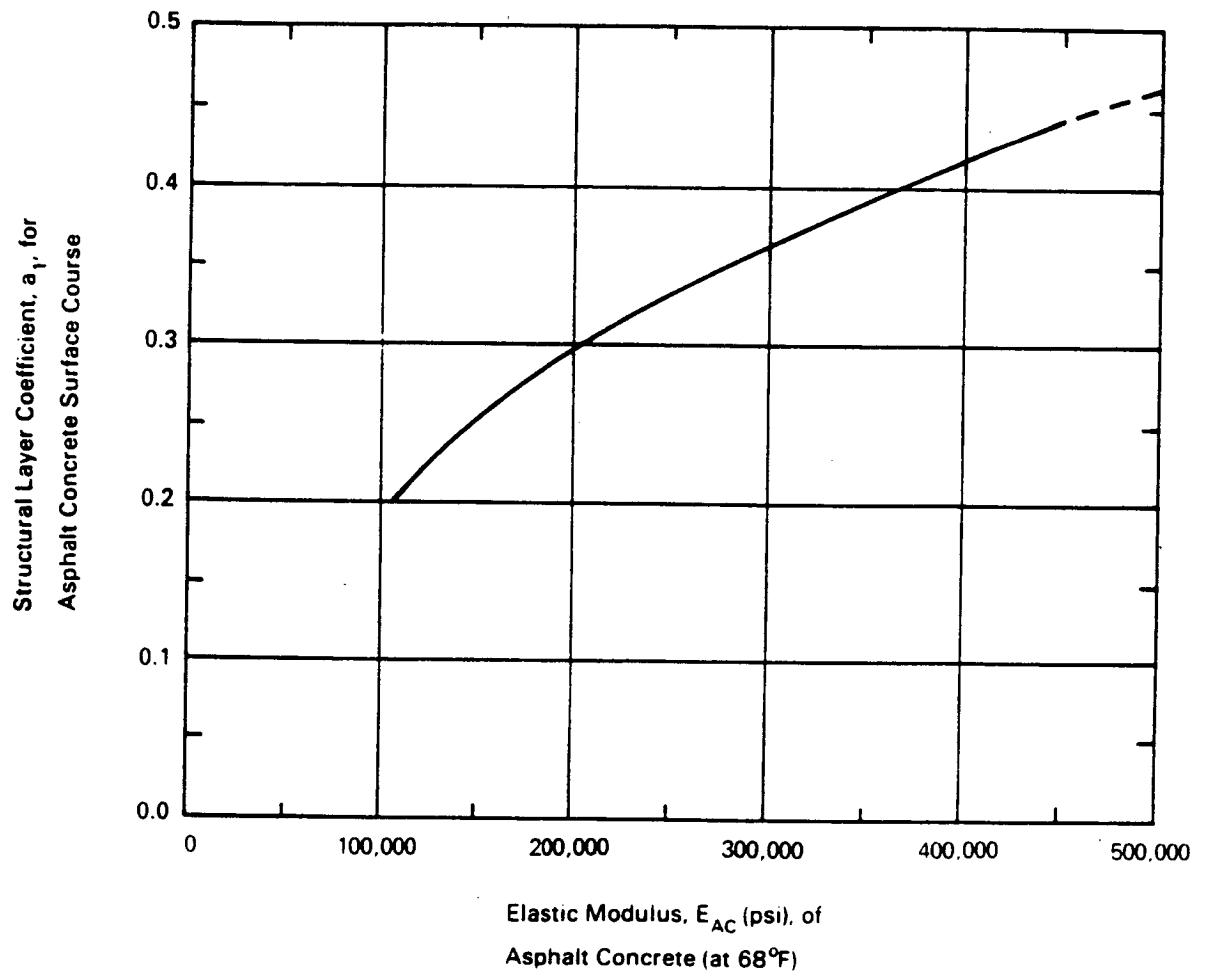


Figure 31. The AASHTO chart for estimating the structural layer coefficient of dense-graded asphalt concrete based on the elastic (resilient) modulus.

Table 10. Layer thicknesses and moduli of the pavement sections of cells 156, 159, and 162 of figure 1 (performance period = 20 years, 18-kips ESAL = 20,000,000).

Cell Number	Structural Number	Total Thickness (inch)	Layer Thicknesses (inch)			Layer Moduli (ksi)			
			AC	Base	Subbase	AC	Base	Subbase	Roadbed Soil
156	10.3	52.46	8.41	3.66	40.40	300	40	25	1
159	6.51	28.90	8.41	3.66	16.80	300	40	25	5
162	5.25	21.03	8.41	3.66	8.96	300	40	25	10

Table 11. Mechanistic responses of the pavement sections of cells 156, 159, and 162 of figure 1.

Cell Number	Deflection at the top of (mills)				Vertical compressive stress at the top of (psi)				Vertical strain at top/bottom of layers (10 ⁻⁴ inch/inch)				Tensile stress at the bottom of the AC layer (psi)
	AC	Base	Subbase	Roadbed	Base	Subbase	Roadbed		AC	Base	Subbase	Roadbed	
156	35.19	34.07	32.79	27.00	15.34	9.44	0.2		0.31/1.79	4.16/3.11	3.79/1.09	1.82	64.05
159	21.83	20.71	19.43	15.66	14.71	8.59	1.46		0.46/1.86	4.17/3.09	3.77/1.95	2.83	68.47
162	16.93	15.79	14.52	12.03	14.38	8.23	3.25		0.27/1.88	4.15/3.07	3.75/2.46	3.14	69.81

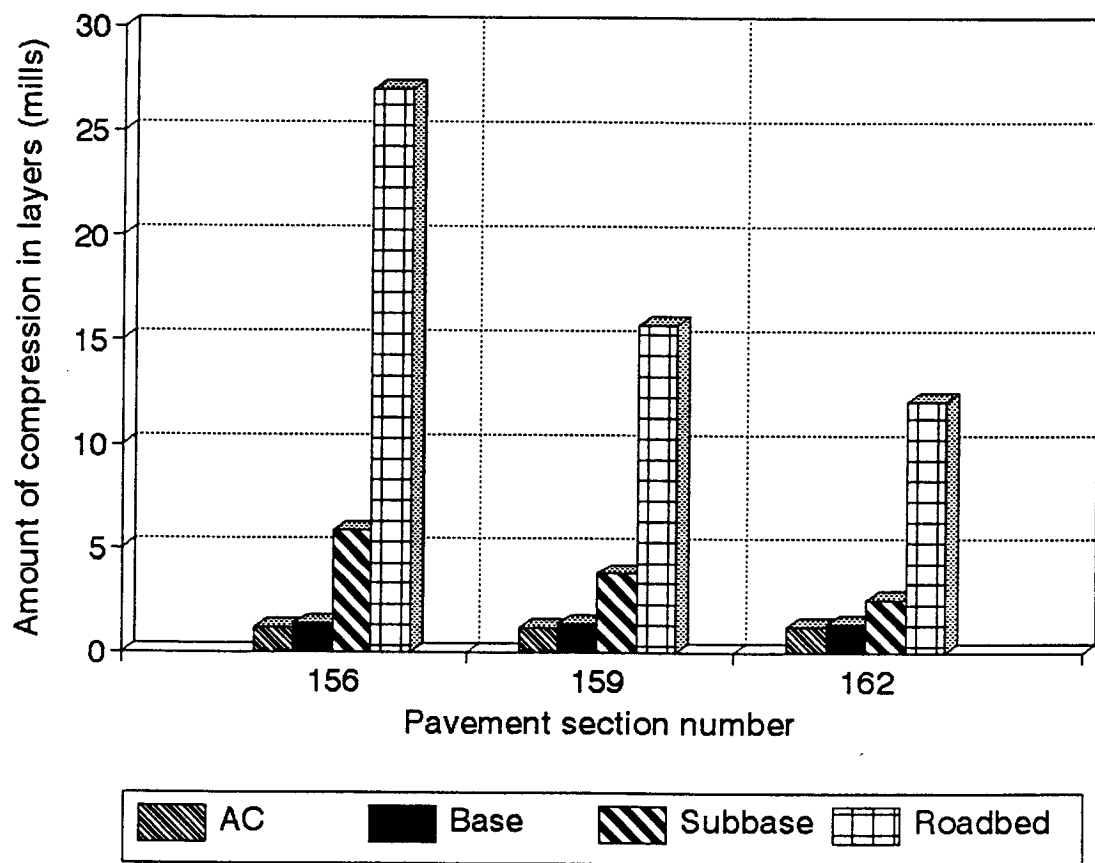


Figure 32. Peak deflection at the top of each pavement layer and roadbed soil for the indicated pavement sections.

roadbed soil. This is illustrated in figure 33 which shows the amounts of compression (the difference between the peak deflection of one layer and that of the layer beneath it) in the AC and base layers are more or less constant for all three pavement sections. The amount of compression in the subbase, however, decreases from about 5 mil for section 156 to about 2 mil for section 162. Since the resilient modulus of the subbase of the three sections is the same (25 ksi), this observation indicates that the subbase of section 156 would experience more damage than that of section 162.

Previously, it was stated that for the same type of roadbed soil and traffic level, the AASHTO design procedure produces pavement sections (based on the structural number) such that the peak pavement deflection is almost constant. However, this finding is not true when the roadbed soil is changed from one type to another. For example, the AASHTO design process produces thicker pavement sections for softer roadbed soils. The consolidation of the softer soils due to the weight of the pavement alone could be substantially higher than that of stiffer soils. The implication herein is that for the same traffic level and pavement layer properties, the AASHTO produced structural numbers for various types of roadbed soil do not provide the same protection level to that soil. Since, for these three sections, the only factor affecting the calculation of the required SN is the resilient modulus of the roadbed soil, one can conclude that:

The AASHTO main design equation for flexible pavements does not properly account for the effects of the resilient modulus of the roadbed soil on the structural capacity of the pavement.

2. Figures 34 and 35 depict the vertical compressive strains induced in the three pavement sections at the top and bottom of each pavement layer. It can be seen that (see figure 34) the vertical strains at the top of the AC, base, and subbase layers are almost constant for the three pavement sections. The vertical strain at the top of the roadbed soil, however, varies and it increases from about 180 microstrain for section 156 to about 320 microstrain for section 162 (an increase of about 100 percent) as the respective resilient modulus of the roadbed soil increases from 1000 to 10,000 psi (1000 percent increase). Once again, this implies that higher damage is being delivered to the roadbed soil of section 156 than that for section 162. The resulting vertical strains at the bottom of the AC, base, and subbase layers shows slightly different pattern (see figure 35). Like the vertical strain at the top of the layers, the vertical strains at the bottom of the AC and base layers are almost constant for all three sections. However, unlike the vertical strain at the top of the subbase layer, the strain at the bottom of the subbase varies and it increases from about 100 microstrain for section 156 to about 250 microstrain for section 162. Given that the modulus of the subbase material is the same for all three sections and it is equal to 25,000 psi, one can

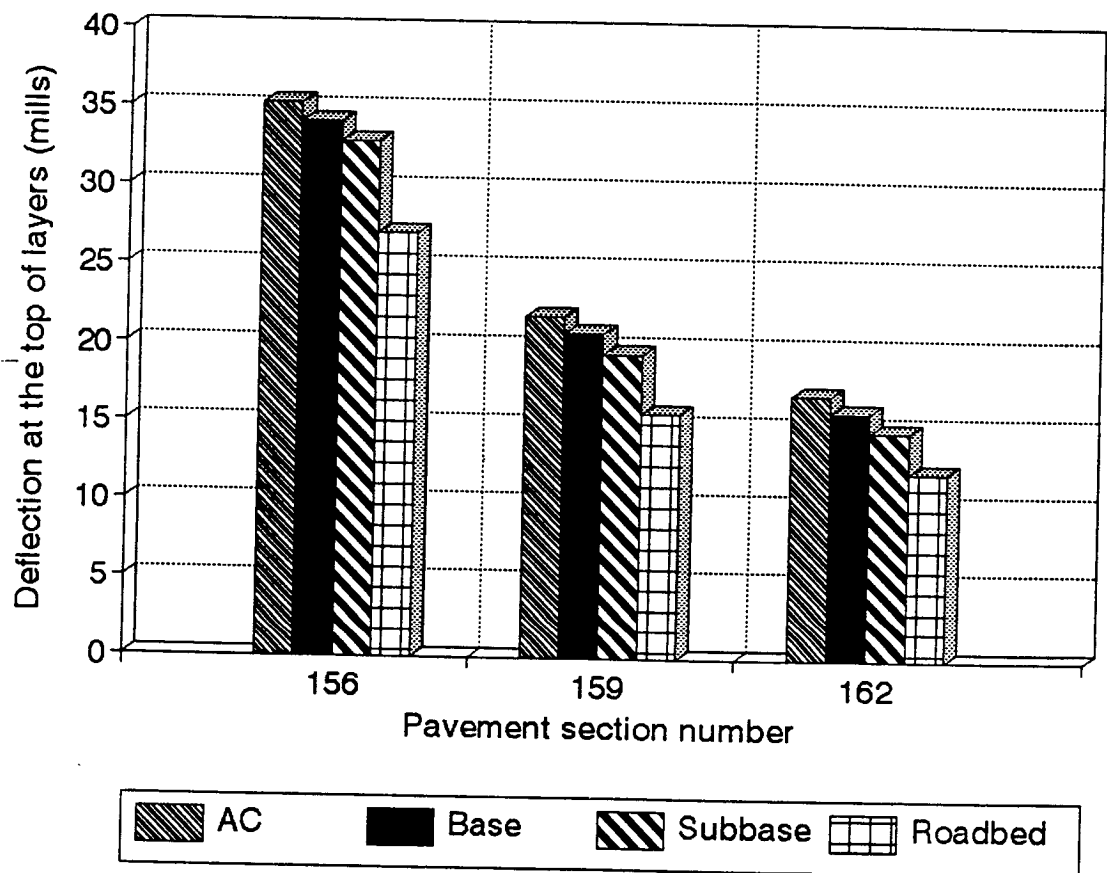


Figure 33. The amount of compression in each pavement layer and in the roadbed soil of the indicated pavement sections.

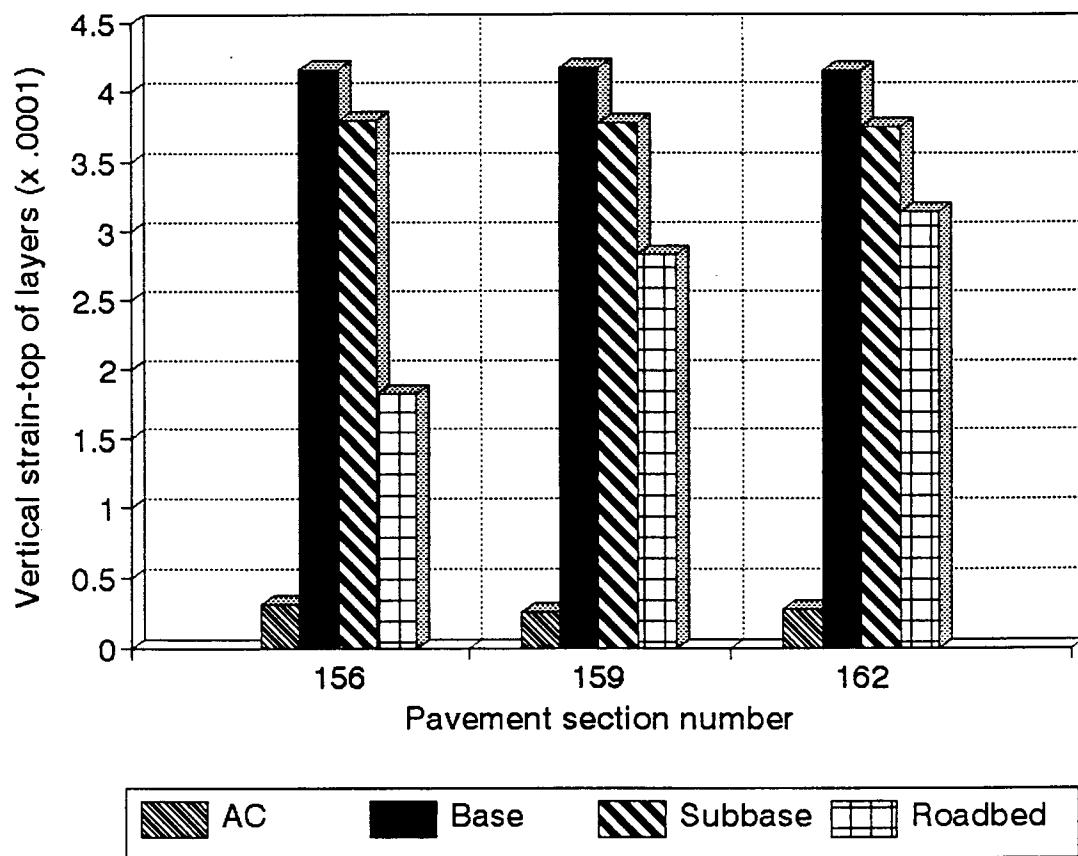


Figure 34. The vertical strains at the top of the layers of the indicated pavement sections.

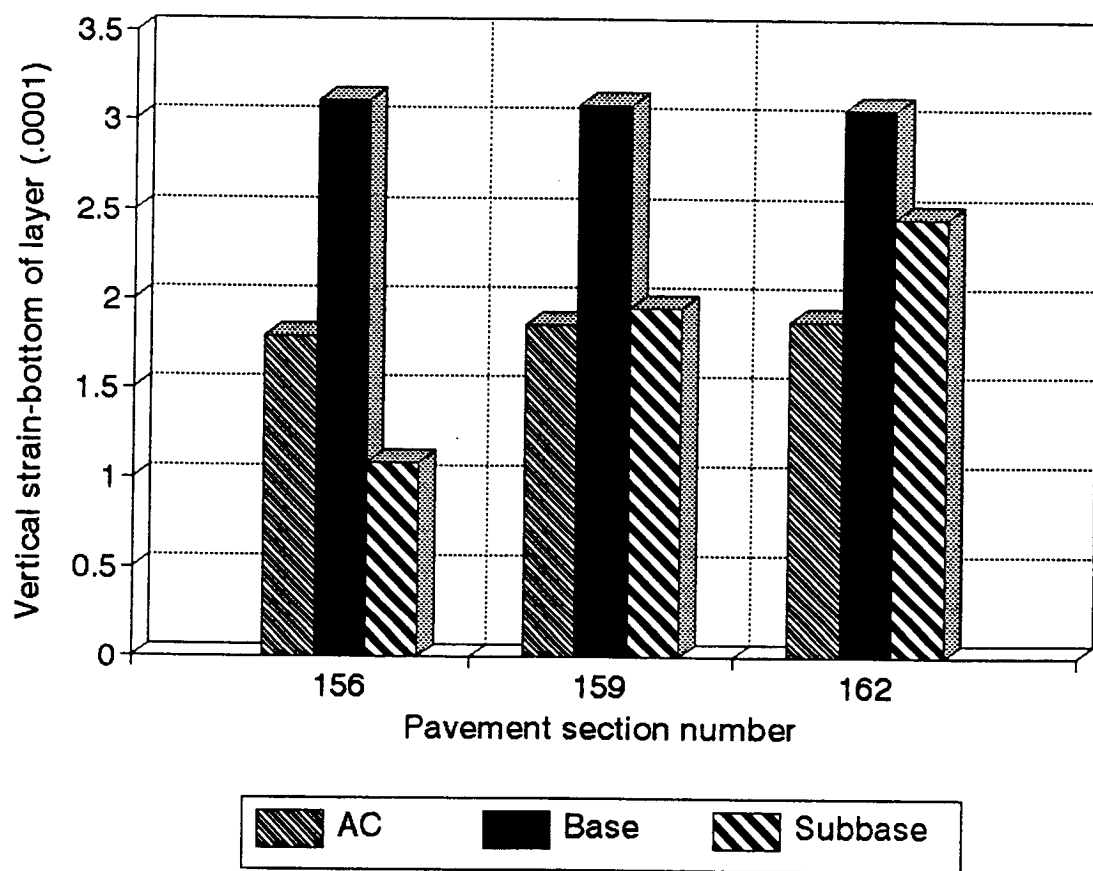


Figure 35. The vertical strains at the bottom of the layers of the indicated pavement sections.

conclude that the subbase material of section 162 receives relatively higher damage than the subbase material of section 156.

3. Finally, examination of the values of the tensile stress induced at the bottom of the AC layer indicates that the tensile stress increases from 64.05 psi for section 156 to 69.81 psi for section 162 (about ten percent increase). Since the resilient modulus of the AC layer is the same for all three sections, the fatigue cracking potential of section 162 is higher than that of section 156.

Given the three observations stated above, one can conclude that:

The role of the resilient modulus of the roadbed soil in the AASHTO main design equation appear to be inadequate. Such a role could not be calibrated because of the lack of field data.

CHAPTER 4

MECHANISTIC EVALUATION OF THE AASHTO DRAINAGE COEFFICIENTS

4.1 PHASE 4 - MECHANISTIC EVALUATION OF THE CONCEPT OF THE AASHTO DRAINAGE COEFFICIENT

4.1.1 The AASHTO Drainage Coefficients

The 1986 AASHTO design methods included descriptions of the selection of input parameters to treat the effects of certain levels of drainage on the predicted pavement performance. However, the AASHTO design guide provided no criteria relative to the ability of various drainage methods to remove moisture from the pavement section. Rather, the AASHTO design guide provides general definitions corresponding to the quality of different drainage levels and recommended drainage coefficients. These are listed in table 12.

Relative to the drainage coefficient, the 1986 AASHTO Design Guide states that (see page II-26 of the guide):

"The treatment for the expected level of drainage for a flexible pavement is through the use of modified layer coefficient (e.g., a higher effective layer coefficient would be used for improved drainage conditions). The factor for modifying the layer coefficient is referred to as an m_i value and has been integrated into the Structural Number (SN) equation along with layer coefficient (a_i) and thickness (D_i); thus:

$$SN = a_1 D_1 + a_2 D_2 m_2 + a_3 D_3 m_3$$

Relative to the above SN equation, one points that is very important to this study must be noted. The SN equation should not be interpreted as "the required SN of a pavement structure is a function of the drainage coefficients and layer thicknesses and coefficients". Indeed, the AASHTO procedure determines the required SN by using the main design equation (presented in the previous chapter) which is a function of the number of 18-kip ESAL, design reliability, standard deviation, serviceability loss during the performance period, and the effective roadbed resilient modulus. After determining the required SN, the layer thicknesses are adjusted as to yield the required SN. Hence, the following statement is absolutely true:

The AASHTO design method determines the required SN of a pavement structure independent of the layer thicknesses, layer coefficients, and drainage coefficients. The layer thicknesses, on the other hand, are a function of the required SN and the given layer and drainage coefficients.

Examination of the structural number equation indicates that the user of the guide may interpret the equation in two different ways as follows:

Table 12. The AASHTO Design Guide definitions of quality of drainage and the recommended drainage coefficients.

Quality of drainage	Water removed within
Excellent	2 hours
Good	1 day
Fair	1 week
Poor	1 month
Very poor	Water will not drain

Quality of drainage	Percent of time structure is exposed to moisture levels approaching saturation			
	Less than 1 percent	1 - 5 percent	5 - 25 percent	Greater than 25 percent
Excellent	1.40 - 1.35	1.35 - 1.30	1.30 - 1.20	1.20
Good	1.35 - 1.25	1.25 - 1.15	1.15 - 1.00	1.00
Fair	1.25 - 1.15	1.15 - 1.05	1.00 - 0.80	0.80
Poor	1.15 - 1.05	1.05 - 0.80	0.80 - 0.60	0.60
Very poor	1.05 - 0.95	0.95 - 0.75	0.60 - 0.40	0.40

1. The user of the AASHTO Guide may obtain the layer thicknesses for a unit value of m_2 and m_3 (i.e., $m_2 = m_3 = 1$), and then either reduce or increase the thickness of each layer according to the actual value of the drainage coefficients as illustrated in example 1 below. In this interpretation, the layer coefficients of the base and subbase materials are not modified. Rather, the thickness of the appropriate layer is either reduced or increased depending on the value of the drainage coefficient. This interpretation (since the layer coefficients are not modified) produces a constant thickness of the AC layer.

It should be noted that the AASHTO DNPS86 program uses this interpretation. For convenience, this interpretation is called herein "the thickness modification method".

2. The user of the AASHTO Guide modify the values of the layer coefficient of the base and subbase materials by multiplying the actual layer coefficient by the drainage coefficient. Hence, the AASHTO design method produces layer thicknesses that are compatible with the modified values of the layer coefficients. Examples for this interpretation are given in the next subsection. Nevertheless, for convenience, this interpretation is called herein "the layer coefficient modification method".

Example 1 - Layer Coefficient Modification Method

Assumes that:

1. the layer coefficients of the base and subbase materials are 1.3 and 1.1, respectively.
2. for drainage coefficients of the base and subbase materials of 1, the AASHTO design procedure produces a base thickness of 6 inches and a subbase thickness of 9 inch.

The actual values of the drainage coefficients of the base and subbase materials are 1.2 and 0.8. The adjusted thicknesses of the base and subbase are:

Adjusted base thickness = $6/1.2 = 5$ inches

Adjusted thickness of the subbase = $9/0.8 = 11.25$ inch

Once again, it is very important to note that regardless of the user interpretation, the AASHTO main design equation produces a constant SN and independent of the values of the drainage coefficients. After determining the required SN, the layer thicknesses are adjusted.

4.1.2 Mechanistic Evaluation of the AASHTO Drainage Coefficients

The mechanistic evaluation of the AASHTO drainage coefficients was conducted by using the data of pavement section 162 of figure 1 of Chapter 1. During the evaluation, Five values of the drainage coefficients were used (0.6, 0.8, 1.0, 1.2, and 1.4). Further, two evaluation

methods were used: the layer thickness modification method, and the layer coefficient modification method. The results of both methods are presented in the next subsections.

4.1.2.1 Layer Thickness Modification Method

As stated above, pavement section number 162 and the corresponding material properties (see figure 1 of chapter 1) were used in this analysis. Using the 1986 AASHTO design procedure, the pavement section was designed five times, once for each of the following values of drainage coefficients (0.6, 0.8, 1.0, 1.2, and 1.4). In each design, the same value of the drainage coefficient was assumed for both the base and the subbase materials. The outputs (layer thicknesses, and structural number) of the AASHTO design procedure, and the values of the drainage coefficients are listed in the first six columns of table 13.

The layer thicknesses obtained from the AASHTO design procedure and the layer moduli (calculated by using the values of the layer coefficients and the proper AASHTO equations) were then used to conduct mechanistic analysis of each design alternatives of section 162. The mechanistic responses are also listed in table 13.

Examination of the values of the various output parameters listed in table 13 indicates that:

1. As it was expected, the structural number is constant and it is independent of the drainage coefficient (also, see figure 36). This implies that the quality of drainage does not affect the structural capacity of the pavement structures (since the AASHTO design procedure uses the structural number to represent the structural capacity of the pavement).
2. Figure 37 depicts the layer thicknesses of the pavement as a function of the drainage coefficient. It can be seen that the AASHTO 1986 design methods produces:
 - a) Constant AC thickness, that is the thickness of the AC layer is not affected by the drainage quality of the various layers.
 - b) Increasing the value of the drainage coefficient (i.e., a better quality drainage) causes the thickness of the base material to decrease.
 - c) Increasing the value of the drainage coefficient causes the thickness of the subbase material to increase.
3. Figure 38 displays the peak deflection calculated at the top of each layer as a function of the drainage coefficient. It can be seen that the deflection of each layer and the total pavement deflection (the deflection at the top of the AC layer) varies with variation in the drainage quality. However, by the AASHTO premises, the performance period and the cumulative 18-kip ESAL expected to travel the pavements are the same.

Table 13. Layer thicknesses and moduli, structural number, and mechanistic responses for various drainage coefficients of pavement section 162 (the 1986 AASHTO procedure, thickness modification method).

Results of the analysis	Drainage coefficient pavement section 162 of figure 1				
	0.60	0.80	1.00	1.20	1.40
Layer thicknesses (inches)					
AC	8.41	8.41	8.41	8.41	8.41
Base	6.10	4.57	3.66	3.05	2.61
Subbase	14.93	11.19	8.95	7.45	6.40
Structural number	5.25	5.25	5.25	5.25	5.25
Layer moduli (ksi)					
AC	300.00	300.00	300.00	300.00	300.00
Base	21.50	29.50	40.00	55.33	75.77
Subbase	13.15	18.19	25.00	34.82	48.17
Roadbed	10.00	10.00	10.00	10.00	10.00
Deflection at top of layer (mills)					
AC	18.37	17.51	16.93	16.42	16.00
Base	17.25	16.36	15.79	15.26	14.56
Subbase	14.63	14.60	14.52	14.36	14.18
Roadbed	10.31	11.37	12.03	12.42	12.64
Amount of compression in layers (mills)					
AC	1.12	1.13	1.14	1.14	1.14
Base	2.82	1.78	1.27	0.92	0.56
Subbase	4.32	3.23	2.49	1.94	1.54
Roadbed	10.31	11.37	12.03	12.42	12.64
Vertical stress at the top of layer (psi)					
Base	11.43	12.92	14.38	15.97	17.48
Subbase	5.76	7.07	8.23	9.32	10.33
Roadbed	2.30	2.55	3.25	3.52	3.68
Tensile stress at the bottom of the AC (psi)	86.32	77.93	69.81	60.94	52.20
Vertical strain at top of layer (in/in)					
AC	0.09	0.19	0.27	0.35	0.42
Base	5.61	4.83	4.15	3.50	2.94
Subbase	4.38	4.12	3.75	3.32	2.91
Roadbed	2.18	2.73	3.14	3.40	3.54
Vertical strain at bottom of layer (in/in)					
AC	2.11	1.99	1.88	1.75	1.83
Base	3.56	3.36	3.07	2.72	2.39
Subbase	2.09	2.34	2.46	2.49	2.45

The AASHTO 1986, thickness method

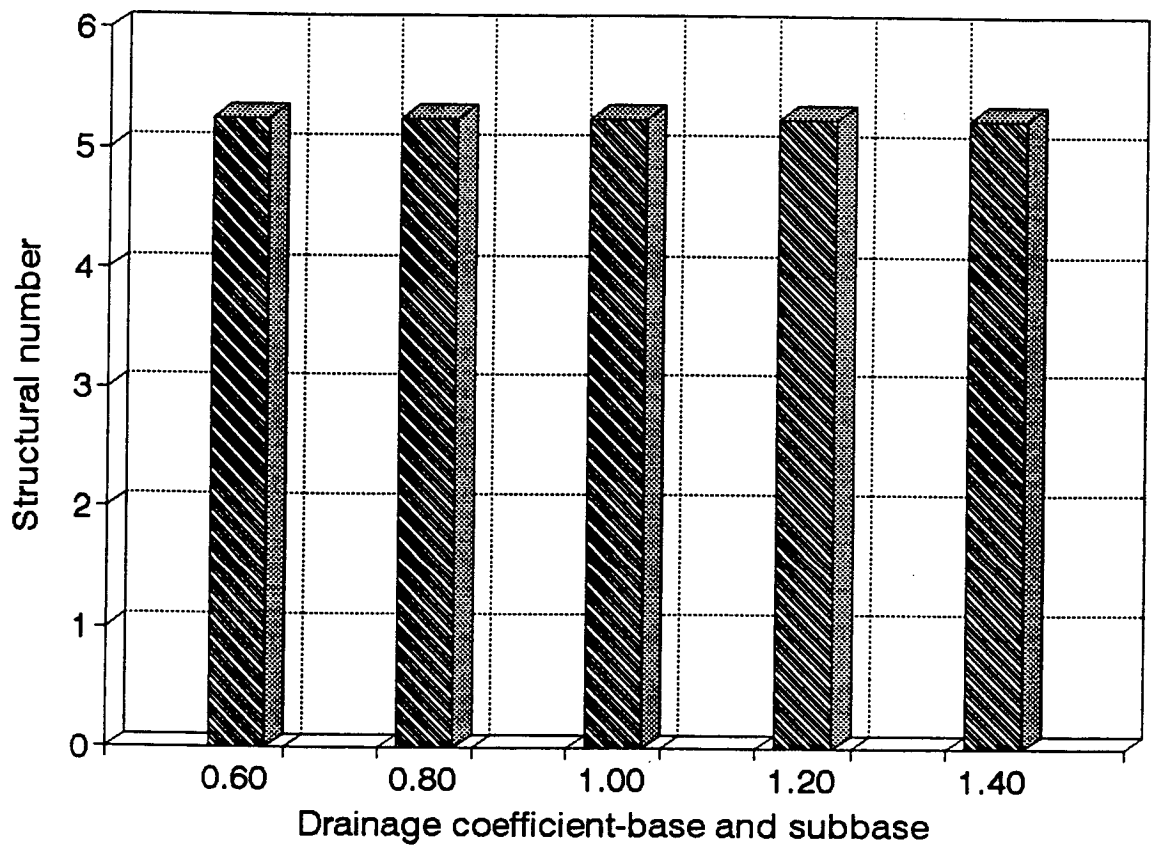


Figure 36. Structural number versus drainage coefficient (AASHTO 1986, thickness modification method).

The AASHTO 1986, thickness method

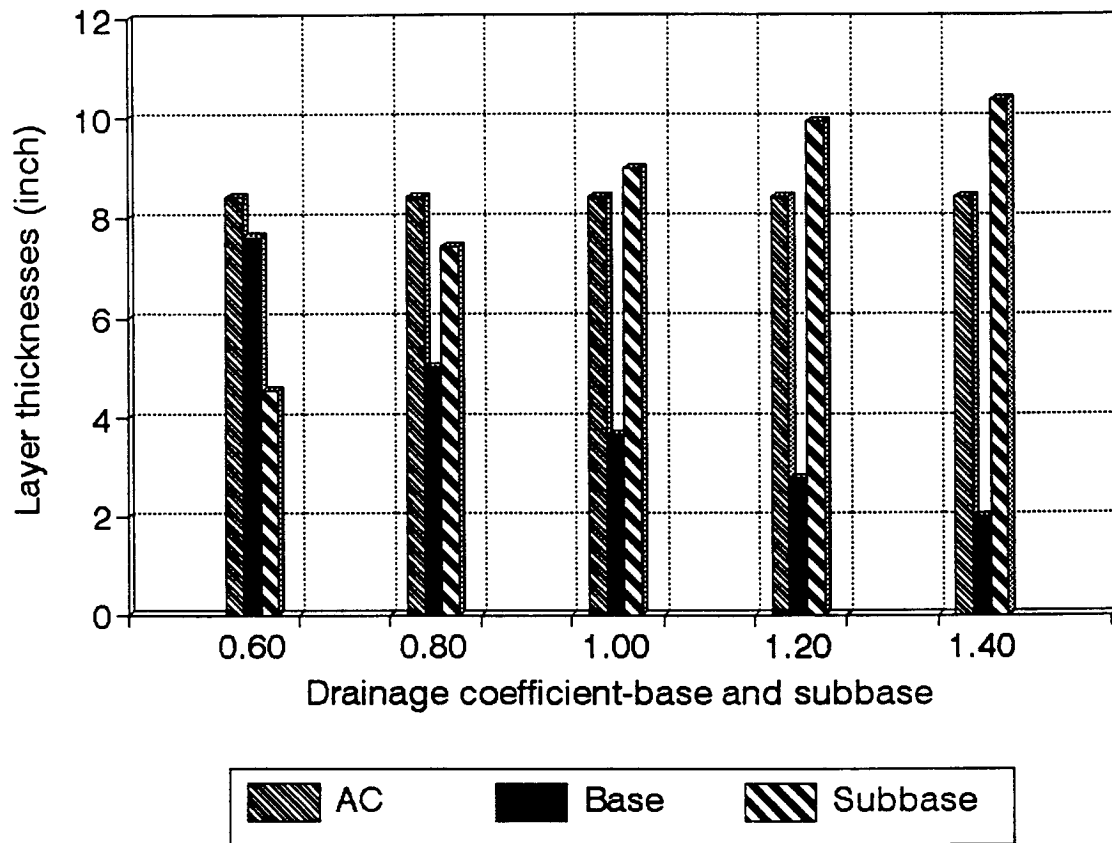


Figure 37. Layer thicknesses versus drainage coefficient (AASHTO 1986, thickness modification method).

The AASHTO 1986, thickness method

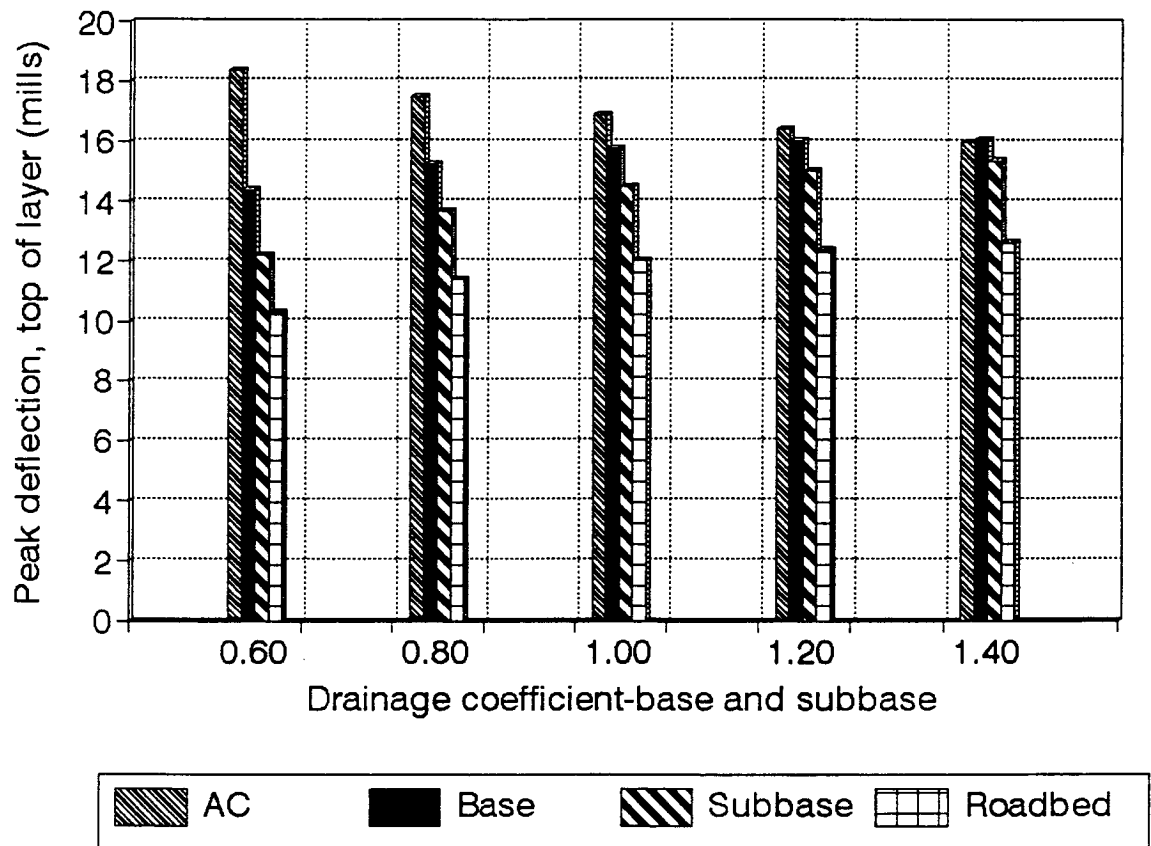


Figure 38. Peak deflection at top of layers versus drainage coefficient (AASHTO 1986, thickness modification method).

4. Figure 39 shows the amount of compression experienced by each pavement layer as a function of the drainage quality. Once again, the damage (measured in terms of compression) delivered to each layer is affected by the quality of drainage. Hence, the five design alternatives (one alternative per one value of the drainage coefficient) should not be expected (as per AASHTO design method) to have the same performance level.
5. Figure 40 depicts the vertical strains calculated at the top of each pavement layer due to an 18-kip ESAL. It can be seen that the vertical strains at the top of the base and subbase layers increases as the quality of drainage deteriorate (the coefficient of drainage decreases). Once again, this implies that higher level of damage is being delivered to those layers with poor drainage quality.
6. Figure 41 depicts the tensile stress induced at the bottom of the AC layer due to an 18-kip ESAL as a function of the drainage coefficient. It can be seen that as the drainage coefficient decreases from 1.4 to 0.6, the magnitude of the tensile stress increases by about 70 percent. Thus, pavement sections constructed by using a poorly drainable material would have a shorter fatigue life than those constructed of well drainable material. Although, the AASHTO design method is suppose to produce pavements with equal performance period.

4.1.2.2 Layer Coefficient Modification Method

In this method, the layer coefficient of the base (a_1) and subbase (a_2) are modified by multiplying it by the value of the drainage coefficient ($a_i \times m_i$). The modified layer coefficient values are then used to estimate the modified layer moduli (using the appropriate AASHTO layer coefficient equations) and as inputs to the AASHTO design method. Unlike the thickness modification method, this procedure produces different thicknesses of all layers including the AC layer. Like the thickness modification method however, the procedure produces a constant structural number.

Pavement section number 162 and the corresponding material properties (see figure 1) were used in this analysis. Like the thickness method, the 1986 AASHTO design procedure was used to design pavement section 162 five times, once for each of the following values of drainage coefficients (0.6, 0.8, 1.0, 1.2, and 1.4). In each design, the same value of the drainage coefficient was assumed for both the base and the subbase materials. The outputs (layer thicknesses, and structural number) of the AASHTO design procedure, and the values of the drainage coefficients are listed in the first six columns of table 14.

The layer thicknesses obtained from the AASHTO designed procedure and the layer moduli (calculated by using the modified values of the layer coefficients and the proper AASHTO equations) were then used to conduct mechanistic analysis of each design alternative of section 162. The mechanistic responses are also listed in table 14.

The AASHTO 1986, thickness method

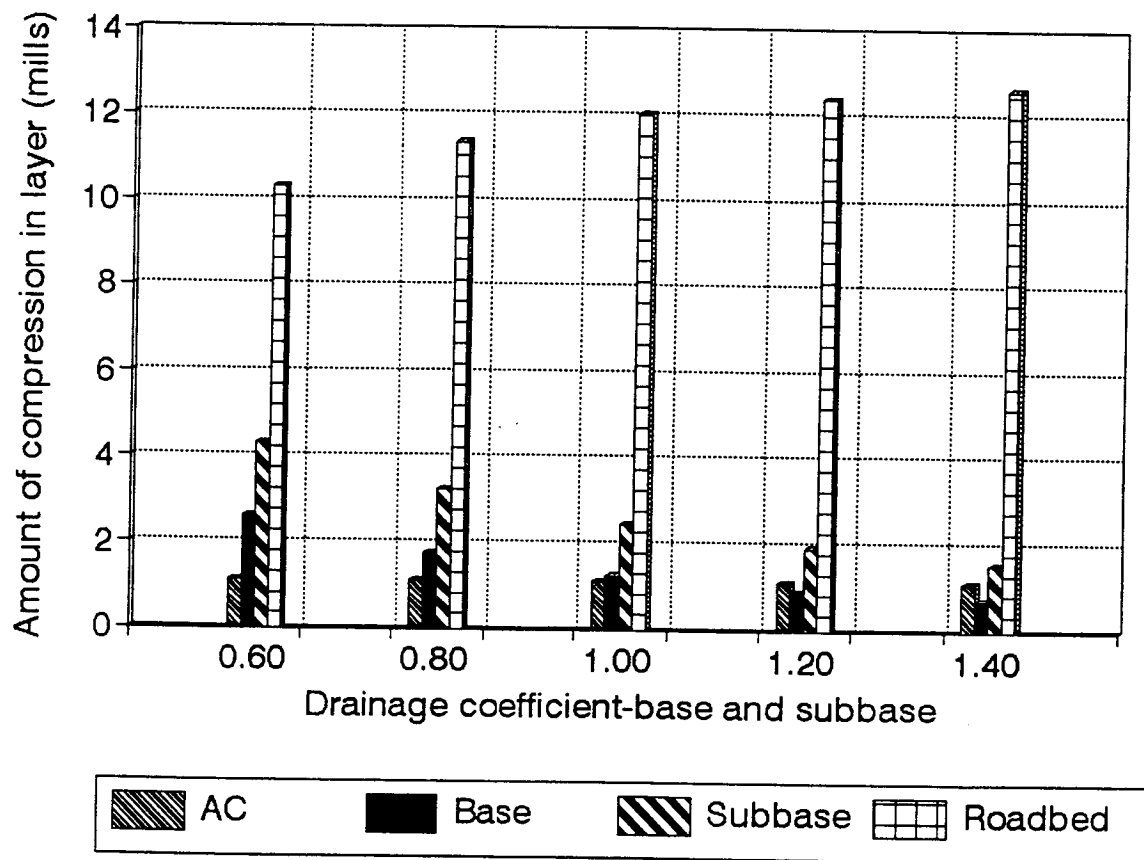


Figure 39. The amount of compression in each layer versus drainage coefficient (AASHTO 1986, thickness modification method).

The AASHTO 1986, thickness method

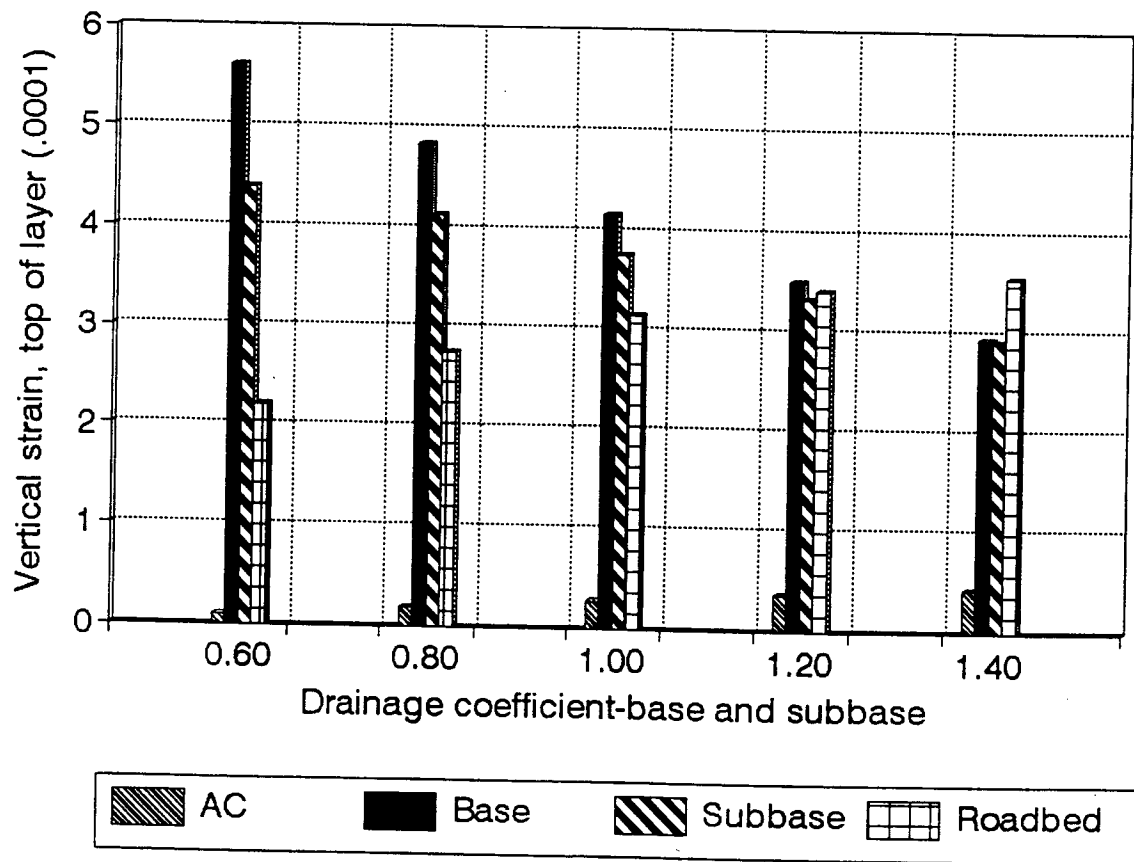


Figure 40. The vertical strain at the top of each layer versus drainage coefficient (AASHTO 1986, thickness modification method).

The AASHTO 1986, thickness method

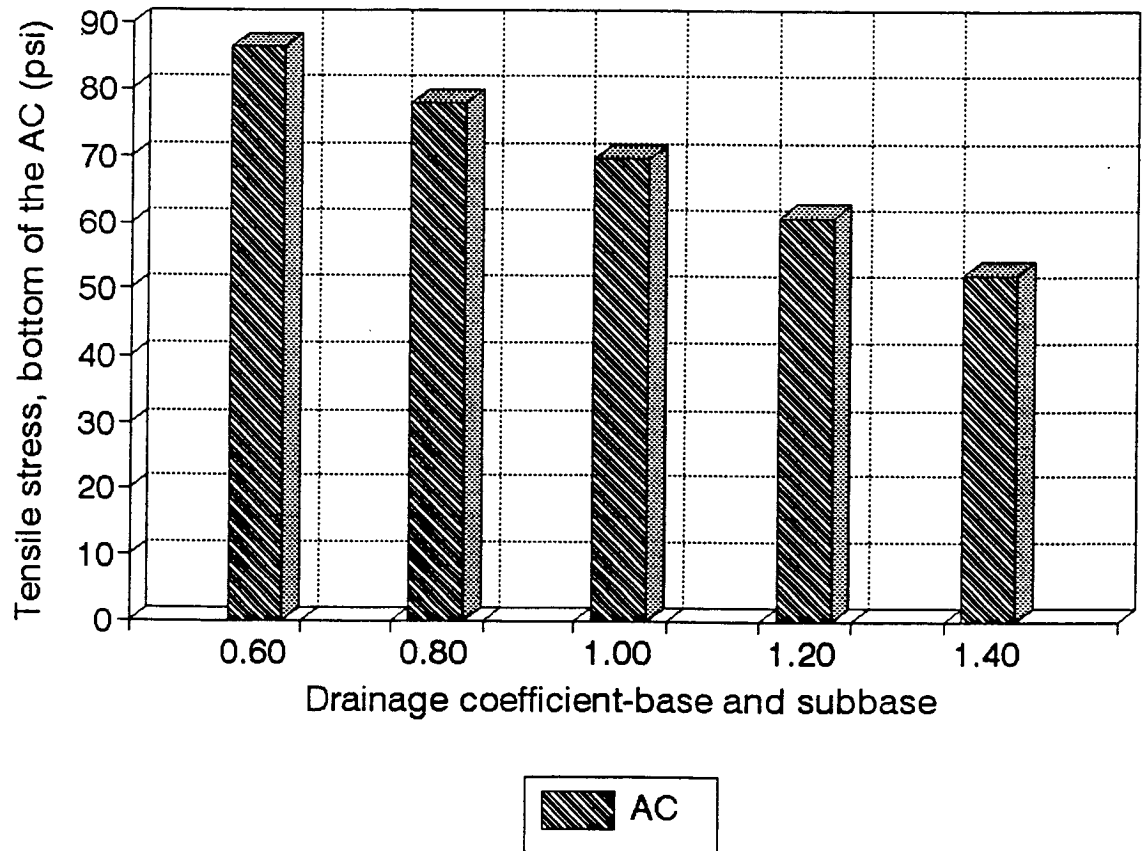


Figure 41. The tensile stress at the bottom of the AC layer versus drainage coefficient (AASHTO 1986, thickness modification method).

Table 14. Layer thicknesses and moduli, structural number, and mechanistic responses for various drainage coefficients of pavement section 162 (the 1986 AASHTO procedure, layer coefficient modification method).

Results of the analysis	Drainage coefficient pavement section 162 of figure 1				
	0.60	0.80	1.00	1.20	1.40
Layer thicknesses (inches)					
AC	10.82	9.44	8.41	7.42	6.57
Base	7.61	4.99	3.66	2.75	1.99
Subbase	4.54	7.41	8.95	9.90	10.34
Structural number	5.25	5.25	5.25	5.25	5.25
Layer moduli (ksi)					
AC	300.00	300.00	300.00	300.00	300.00
Base	21.50	29.50	40.00	55.33	75.77
Subbase	13.15	18.19	25.00	34.82	48.17
Roadbed	10.00	10.00	10.00	10.00	10.00
Deflection at top of layer (mills)					
AC	15.78	16.52	16.93	17.07	17.01
Base	14.41	15.28	15.79	16.05	16.10
Subbase	12.22	13.66	14.52	15.08	15.38
Roadbed	11.04	11.63	12.03	12.33	12.59
Amount of compression in layers (mills)					
AC	1.37	1.24	1.14	1.02	0.91
Base	2.19	1.82	1.27	0.99	0.72
Subbase	1.18	2.03	2.49	2.73	2.79
Roadbed	11.04	11.63	12.03	12.33	12.59
Vertical stress at the top of layer (psi)					
Base	7.70	10.55	14.38	19.76	26.12
Subbase	3.52	5.49	8.23	12.40	16.29
Roadbed	2.67	2.98	3.25	3.49	3.72
Tensile stress at the bottom of the AC (psi)	63.22	68.23	69.81	67.14	60.14
Vertical strain at top of layer (in/in)					
AC	0.50	0.37	0.27	0.19	0.15
Base	3.90	4.06	4.15	4.13	3.94
Subbase	2.90	3.40	3.75	4.00	4.12
Roadbed	2.40	2.85	3.14	3.38	3.57
Vertical strain at bottom of layer (in/in)					
AC	1.52	1.72	1.88	2.00	2.07
Base	2.35	2.78	3.07	3.29	3.40
Subbase	2.43	2.44	2.46	2.47	2.47

Examination of the values of the various output parameters listed in table 14 indicates that:

1. Like the thickness modification method, the structural number of all design alternatives is constant and it is independent of the drainage coefficient (also, see figure 42). This implies that the quality of drainage does not affect the structural capacity of the pavement structures (the AASHTO design procedure uses the structural number to represent the required structural capacity of the pavement).
2. Figure 43 depicts the layer thicknesses of the pavement as a function of the drainage coefficient. It can be seen that the AASHTO method produces:
 - a) Higher AC thickness for lower values of drainage coefficients. That is the thickness of the AC layer is affected by the drainage quality of the various layers. Since the effective layer coefficient of the base is affected by the drainage coefficient, the required thickness of the AC layer to protect the base material should be different. Hence, this method (the layer modification method) produces more reasonable results than that of the thickness modification method.
 - b) Higher base thickness for lower values of drainage coefficients. This result is compatible to that of the thickness modification method.
 - c) Higher subbase thickness for higher values of drainage coefficients. This result is also compatible to that of the thickness modification method.
3. Figure 44 displays the peak deflection calculated at the top of each layer as a function of the drainage coefficient. It can be seen that the deflection of each layer and the total pavement deflection (the deflection at the top of the AC layer) varies with variation in the drainage quality. These variations however, are less than those produced by the thickness modification method (see figure 38). In this regard, the peak pavement deflection (the deflection at the top of the AC layer) slightly decreases as the quality of drainage deteriorates which is exactly the opposite to that produced from the thickness modification method. Thus, the layer modification method seems to produce more consistent pavement sections than the thickness modification method.
4. Figure 45 shows the amount of compression delivered to each pavement layer as a function of the drainage quality. The variations however, are less than those observed in figure 39 (the thickness modification method). Hence, this method produces more consistent layer thickness designs than the other method.
5. Figure 46 depicts the vertical strains calculated at the top of each pavement layer due to an 18-kip ESAL. It can be seen that the vertical strains at the top of the base and subbase layers and at the top of the roadbed soil increases as the quality of drainage improves (the coefficient of drainage increases). Once again, this

The AASHTO 1986 layer coefficient modification method

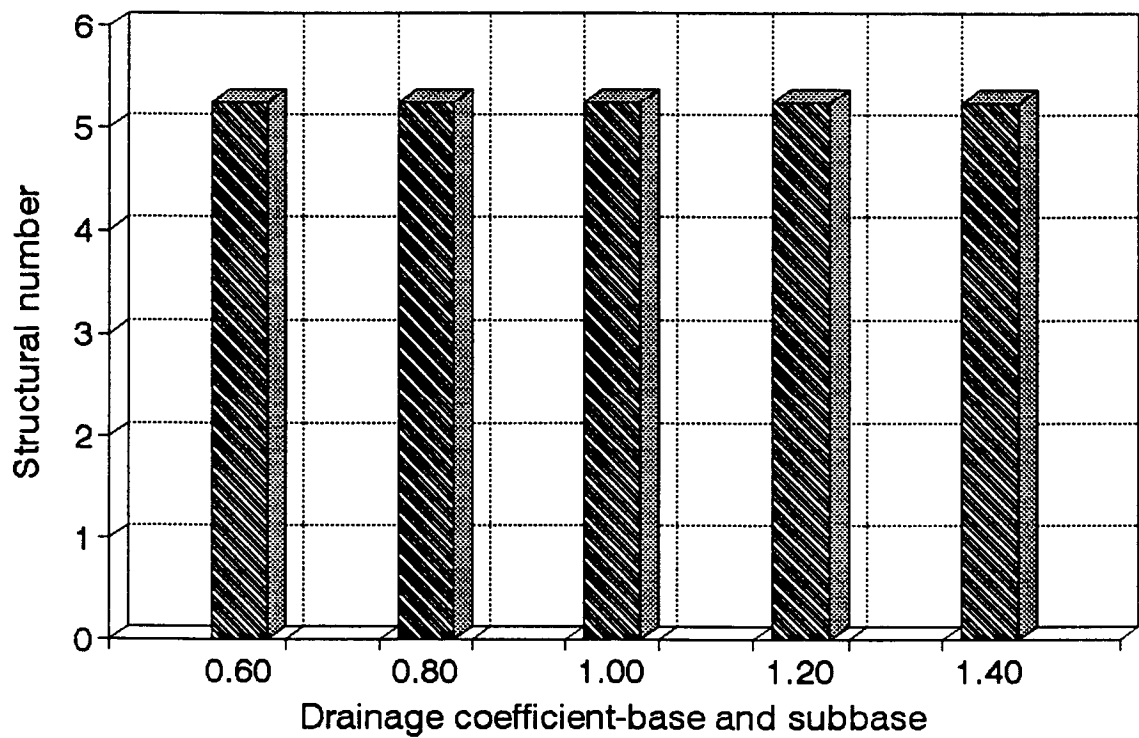


Figure 42. Structural number versus drainage coefficient (AASHTO 1986, layer coefficient modification method).

The AASHTO 1986 layer coefficient modification method

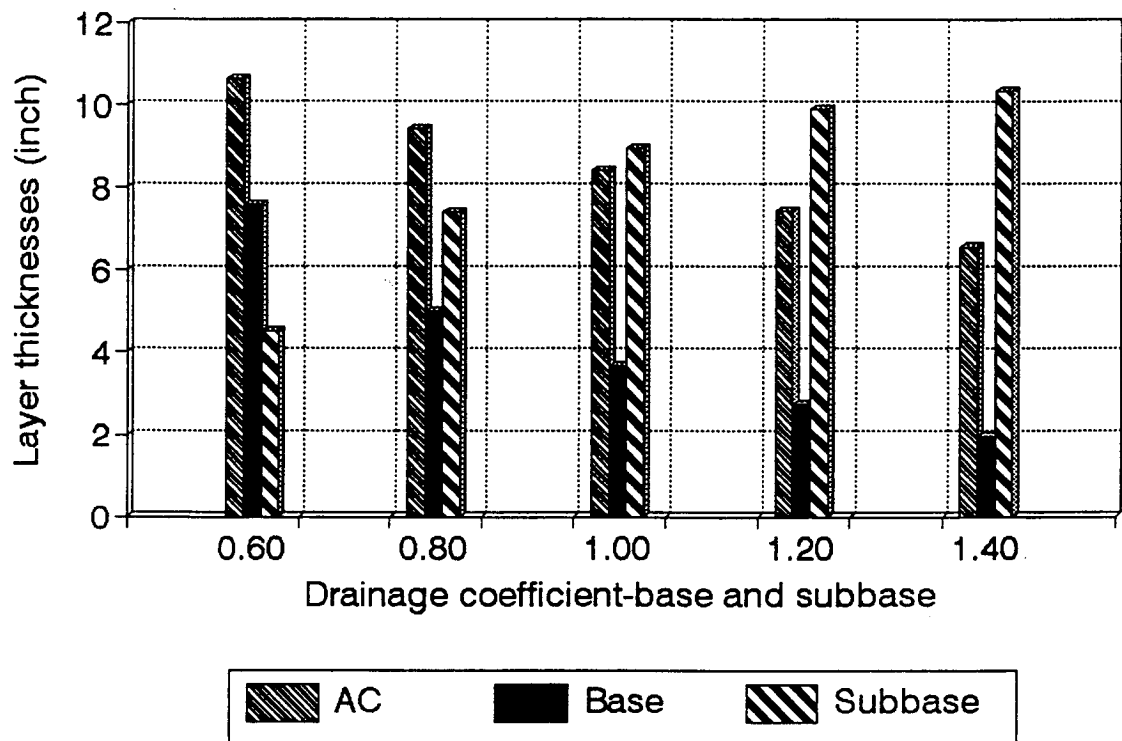


Figure 43. Layer thicknesses versus drainage coefficient (AASHTO 1986, layer coefficient modification method).

The AASHTO 1986 layer coefficient modification method

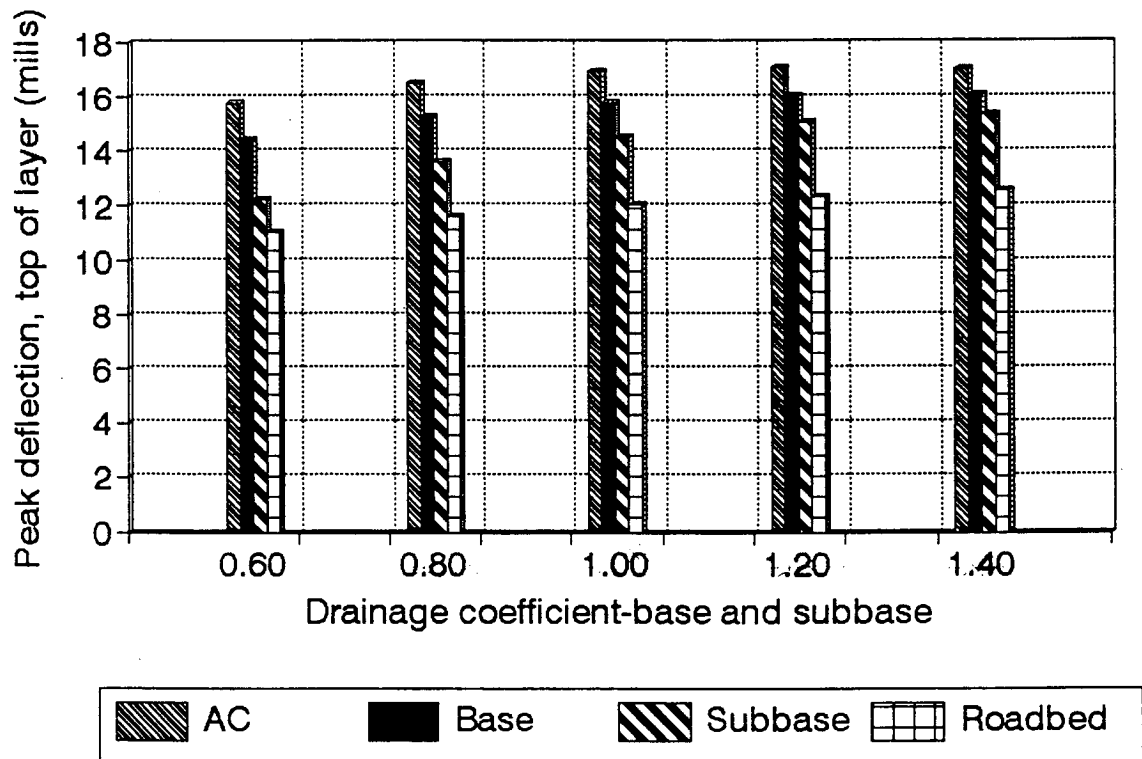


Figure 44. Peak deflection at top of layers versus drainage coefficient (AASHTO 1986, layer coefficient modification method).

The AASHTO 1986 layer coefficient modification method

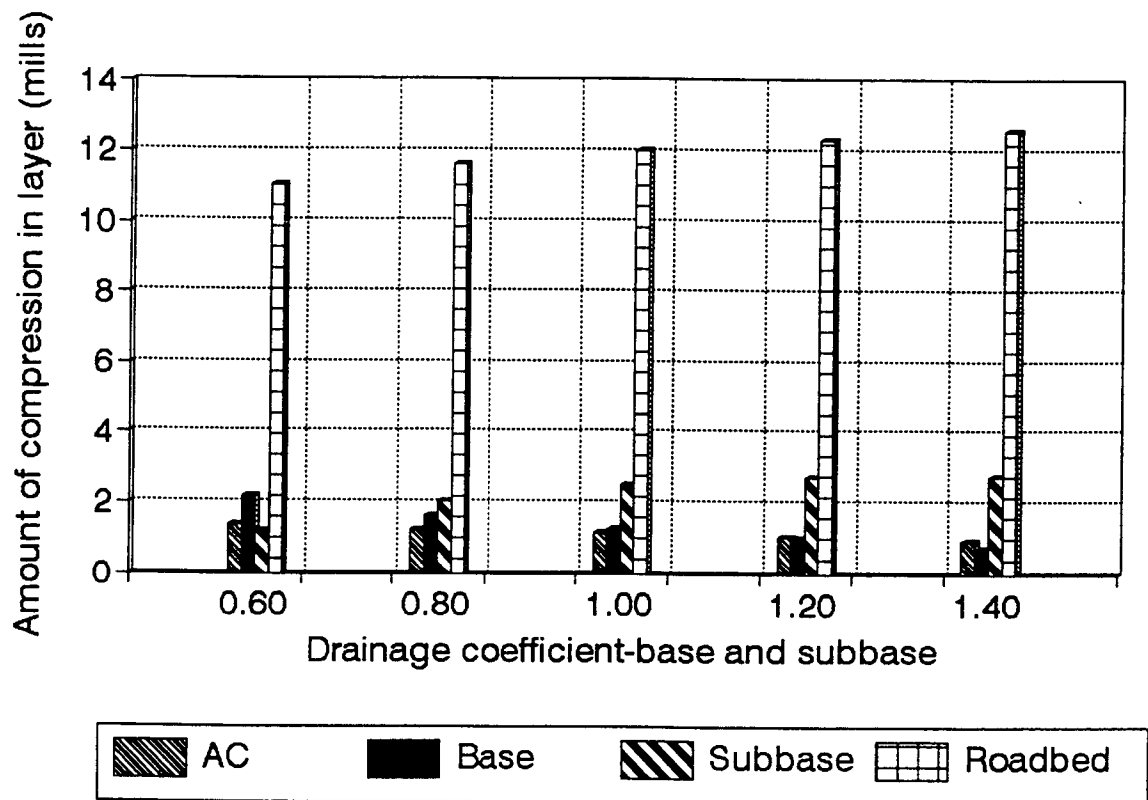


Figure 45. The amount of compression in each layer versus drainage coefficient (AASHTO 1986, layer coefficient modification method).

The AASHTO 1986 layer coefficient modification method

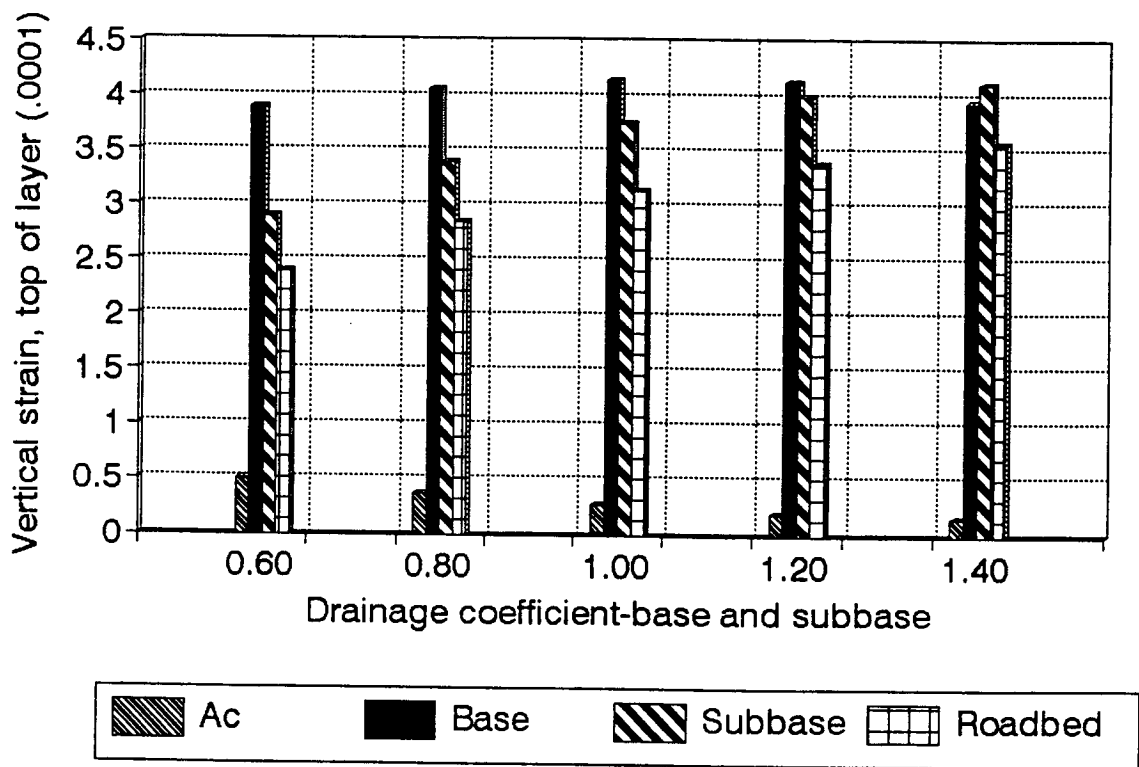


Figure 46. The vertical strain at the top of each layer versus drainage coefficient (AASHTO 1986, layer coefficient modification method).

observation is the opposite to that shown in figure 39 (the thickness modification method). Based on this observation, one can conclude that the layer coefficient modification method seems to produce more consistent results than those of the thickness modification method.

6. Figure 47 depicts the tensile stress induced at the bottom of the AC layer due to an 18-kip ESAL as a function of the drainage coefficient. It can be seen that the maximum variation in the magnitude of the tensile stress from one section to another is about 17 percent. For the thickness modification method, this variation was about 70 percent (see figure 41). Again, the layer coefficient modification method tends to produce better thickness design than the thickness modification method.

4.1.2.3 Mechanistic-Based Modification of the AASHTO Drainage Coefficient Procedure

Once again, the intent of the 1986 AASHTO design procedure is that, for the same effective modulus of the roadbed soil, traffic level, serviceability loss, performance period, design reliability, and an overall standard deviation, is to produce pavement sections with equal performance. That is regardless of the material used in the various pavement layers or their drainage coefficients, the AASHTO methods produces combinations of layer thicknesses as to insure equal pavement damage during the design performance period. Results of the mechanistic analyses showed that the level of damage induced in a pavement section in terms of deflections, stresses, and strains vary significantly with drainage coefficients. To this end, a mechanistic-based calibration of the AASHTO method was developed to account for the effects of drainage quality on the pavement performance. During the development, various forms of the AASHTO SN equation were employed. The one that produced the most promising results (minimum variations in the pavement deflections, stresses, and strains) is presented below. In this mechanistic modified method, the values of the drainage coefficients recommended in the 1986 AASHTO Design Guide were used. The method consists of several steps as follows:

1. Calculate the effective values of the layer coefficients of the base and subbase materials using the following equation:

$$a_{ci} = (a_i)(m_i)^{0.5}$$

where a_{ci} = the effective layer coefficient of layer "i";
 a_i = the layer coefficient of layer "i"; and
 m_i = the drainage coefficient of layer "i".

2. Calculate the design value of the resilient modulus using the following equation:

The AASHTO 1986 layer coefficient modification method

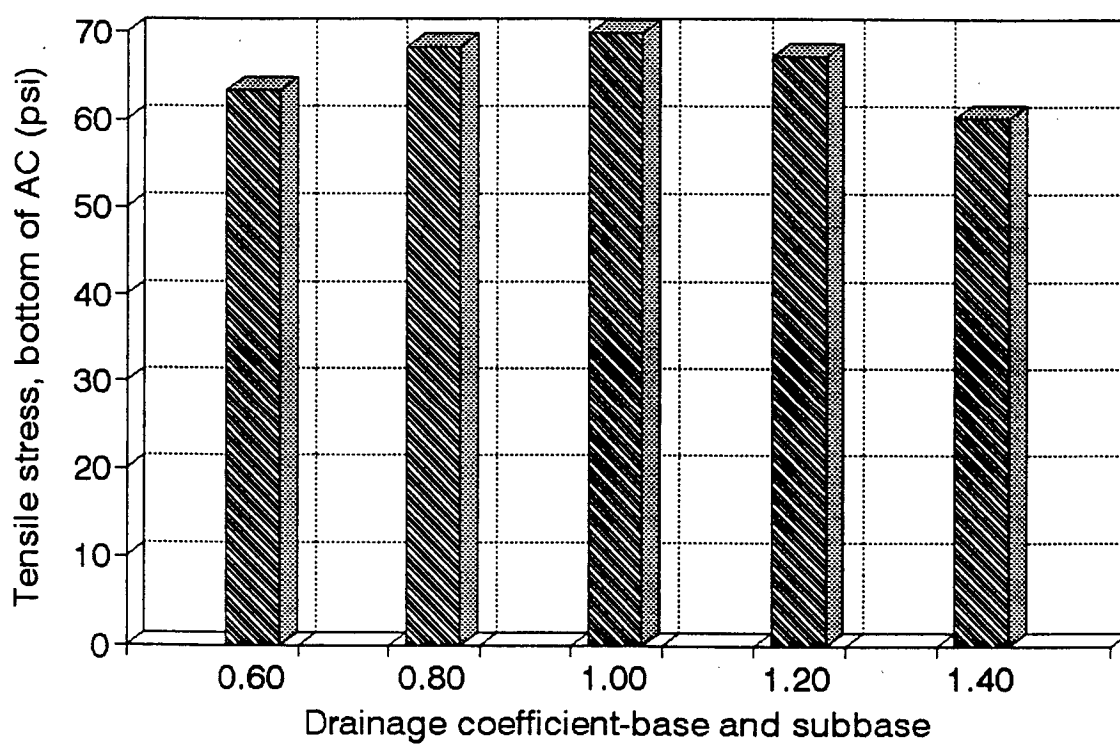


Figure 47. The tensile stress at the bottom of the AC layer versus drainage coefficient (AASHTO 1986, layer coefficient modification method).

$$MR_{RBd} = (MR_{EFF})(m_3)^{0.5}$$

- where MR_{RBd} = the design value of the resilient modulus of the roadbed soil (psi);
 MR_{EFF} = the AASHTO defined effective resilient modulus of the roadbed soil (psi); and
 m_3 = the drainage coefficient of the subbase material or of the layer immediately above the roadbed soil.

3. Use the values calculated in steps 1 and 2 above as inputs to the AASHTO design procedure to obtain the required SN and layer thicknesses.

As in the previous two methods, pavement section number 162 and the corresponding material properties (see figure 1 of chapter 1) were used in this analysis. Like the other two methods of the previous two subsections, the 1986 AASHTO design procedure was used to design pavement section 162 five times, once for each of the following values of drainage coefficients (0.6, 0.8, 1.0, 1.2, and 1.4). In each design, the same value of the drainage coefficient was assumed for both the base and the subbase materials. The outputs (layer thicknesses, and structural number) of the AASHTO design procedure, and the values of the drainage coefficients are listed in the first six columns of table 15.

The layer thicknesses obtained from the AASHTO designed procedure, the layer moduli (calculated by using the effective values of the layer coefficients and the proper AASHTO equations), and the design value of the resilient modulus of the roadbed soil were then used to conduct mechanistic analysis of each design alternatives of section 162. The mechanistic responses are also listed in table 15.

Figures 48 through 53 show, respectively, the required structural number and layer thicknesses produced by using the AASHTO method, and the mechanistic outputs (the peak deflection at the top of each pavement layer and roadbed soil, the amount of compression in each layer, the vertical strains at the top of each layer, and the tensile stress at the bottom of the AC layer) plotted as functions of the values of the drainage coefficients. Discussion of the results and their comparison with those obtained from the other two methods (thickness modification and layer coefficient modification methods) are presented in the next subsection.

4.1.2.4 Comparison of the Results of the Three Methods

Each of the mechanistic responses obtained from the mechanistic analyses of the various AASHTO design alternatives of pavement section 162 were compared. Results of this comparison are presented and discussed below.

Table 15. Layer thicknesses and moduli, structural number, and mechanistic responses for various layer coefficients of pavement section 162 (mechanistic-based modification of the 1986 AASHTO procedure).

Results of the analysis	Drainage coefficient pavement section 162 of figure 1				
	0.60	0.80	1.00	1.20	1.40
Layer thicknesses (inches)					
AC	9.64	8.99	8.41	7.80	7.53
Base	5.75	4.26	3.66	2.97	2.67
Subbase	10.70	9.90	8.95	8.70	8.28
Structural number	5.69	5.44	5.25	5.09	4.97
Layer moduli (ksi)					
AC	300.00	300.00	300.00	300.00	300.00
Base	27.91	33.58	40.00	48.61	53.32
Subbase	16.78	21.21	25.00	30.83	34.12
Roadbed	7.75	8.94	10.00	10.95	11.83
Deflection at top of layer (mills)					
AC	18.19	17.44	16.93	16.48	16.03
Base	16.93	16.24	15.79	15.41	14.99
Subbase	15.13	14.81	14.52	14.35	14.02
Roadbed	12.52	12.22	12.03	11.85	11.60
Amount of compression in layers (mills)					
AC	1.26	1.20	1.14	1.07	1.04
Base	1.80	1.43	1.27	1.06	0.97
Subbase	2.61	2.59	2.49	2.50	2.42
Roadbed	12.52	12.22	12.03	11.85	11.60
Vertical stress at the top of layer (psi)					
Base	10.04	12.10	14.38	17.37	18.90
Subbase	4.84	6.66	8.23	10.67	12.03
Roadbed	2.10	2.68	3.25	3.81	4.25
Tensile stress at the bottom of the AC (psi)	67.52	69.15	69.81	69.13	68.32
Vertical strain at top of layer (in/in)					
AC	0.37	0.32	0.27	0.22	0.20
Base	4.05	4.11	4.15	4.15	4.13
Subbase	3.25	3.54	3.75	3.93	4.00
Roadbed	2.61	2.88	3.14	3.36	3.47
Vertical strain at bottom of layer (in/in)					
AC	1.69	1.79	1.88	1.96	2.00
Base	2.62	2.91	3.07	3.24	3.31
Subbase	2.13	2.29	2.46	2.56	2.64

The AASHTO 1986 Mechanistic-based modification method

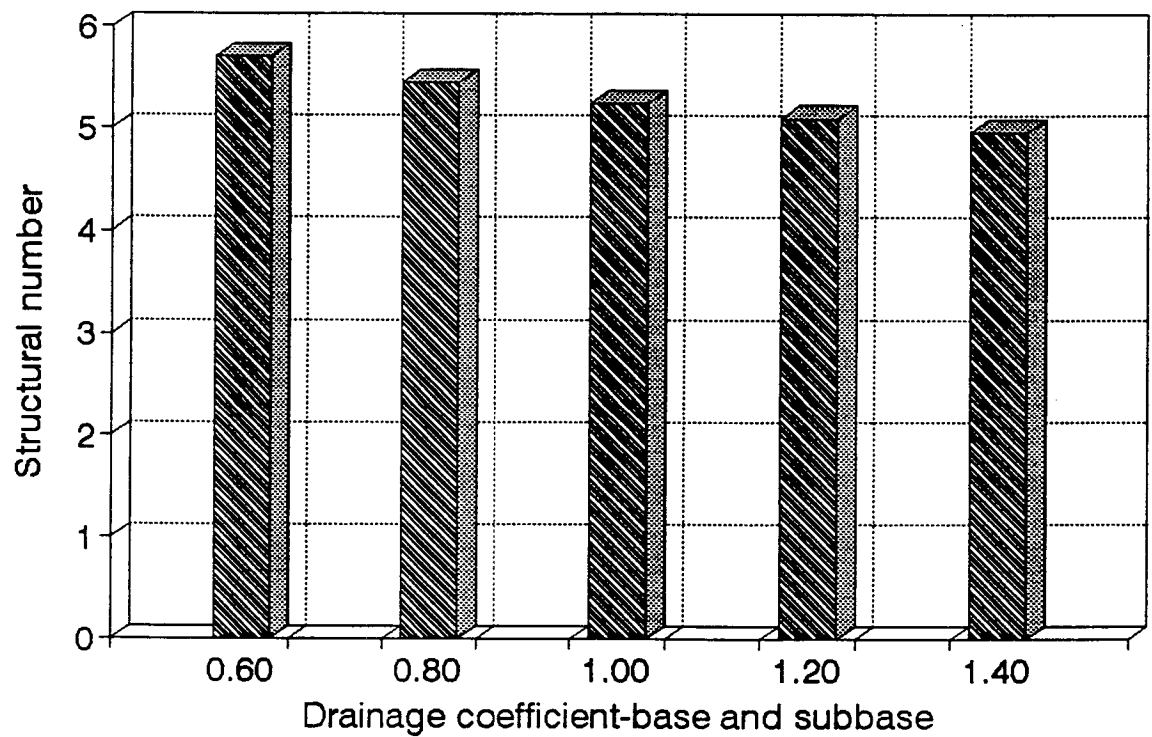


Figure 48. Structural number versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).

The AASHTO 1986

Mechanistic-based modification method

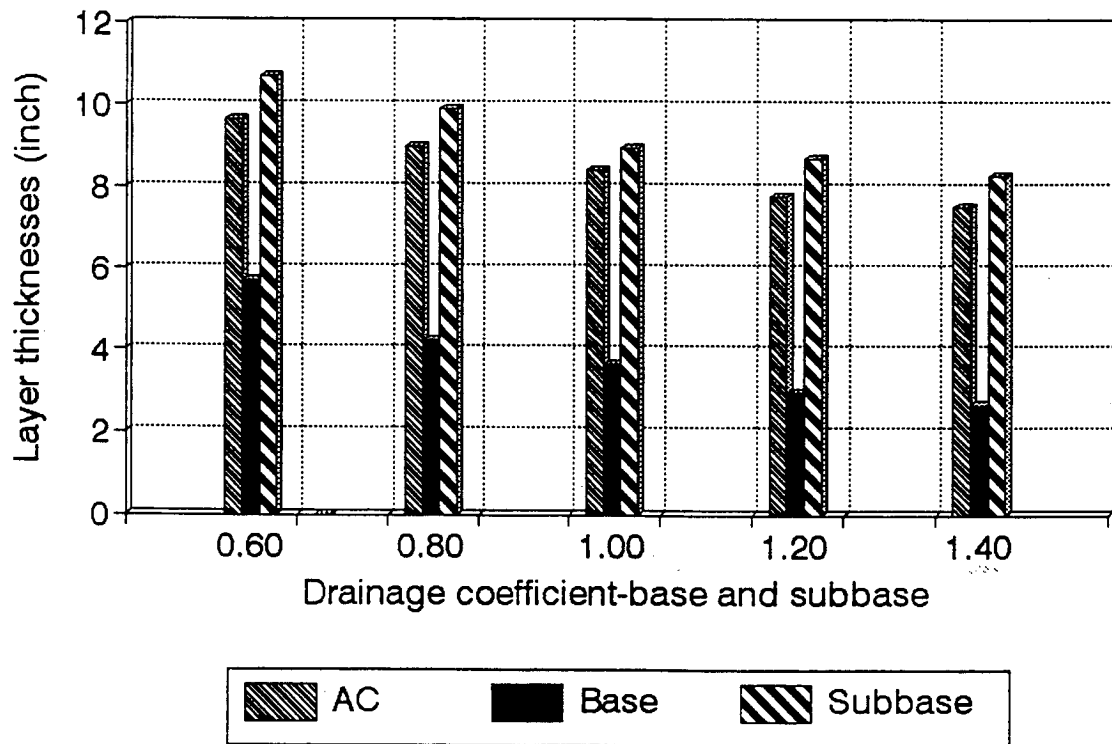


Figure 49. Layer thicknesses versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).

The AASHTO 1986

Mechanistic-based modification method

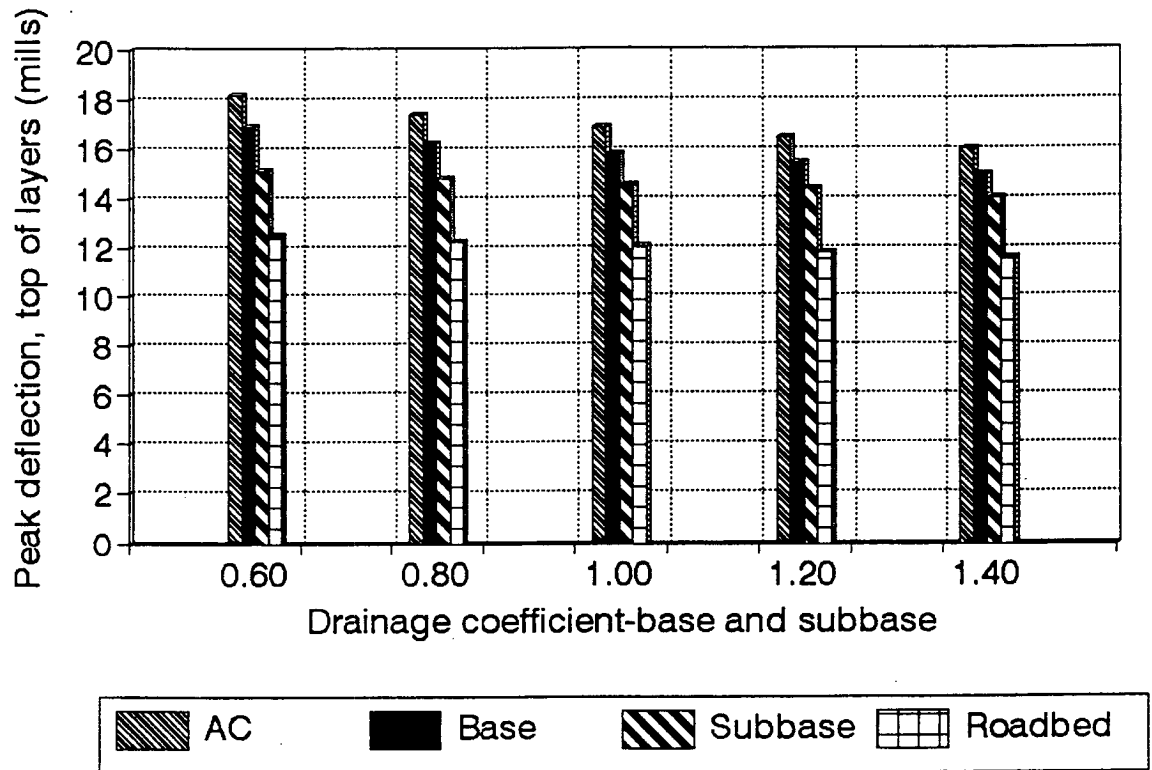


Figure 50. Peak deflection at top of layers versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).

The AASHTO 1986

Mechanistic-based modification method

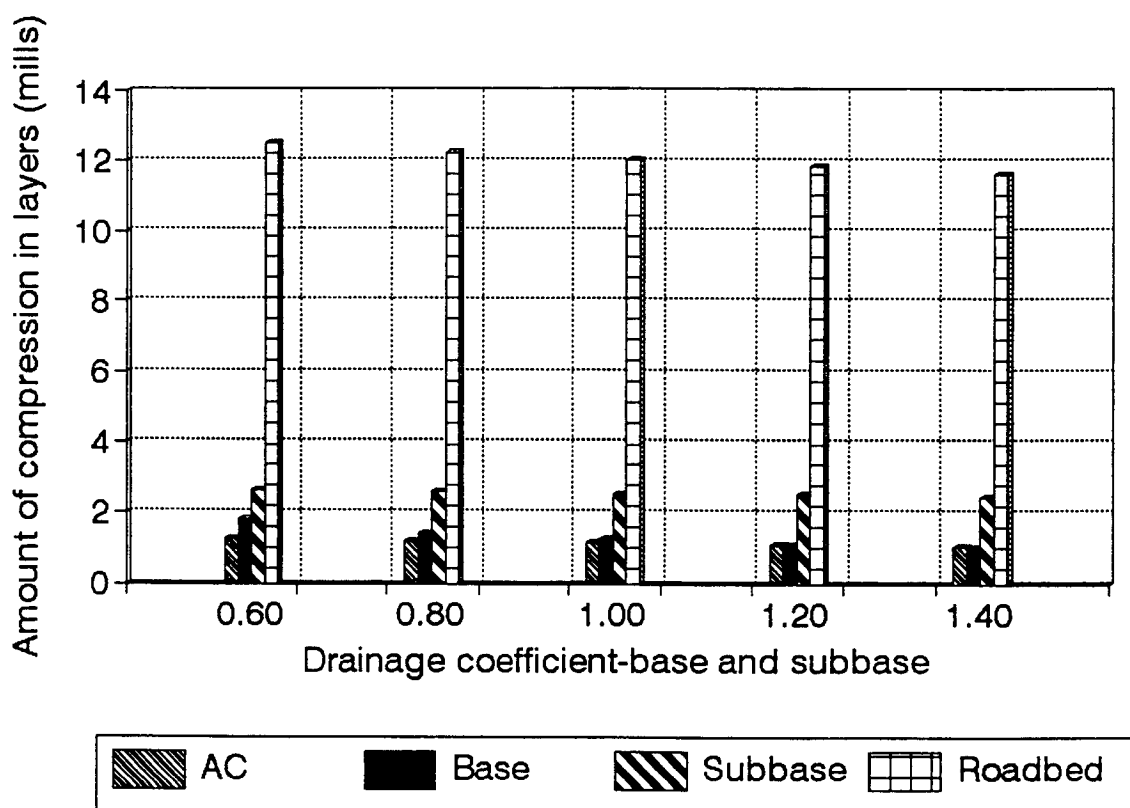


Figure 51. The amount of compression in each layer versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).

The AASHTO 1986

Mechanistic-based modification method

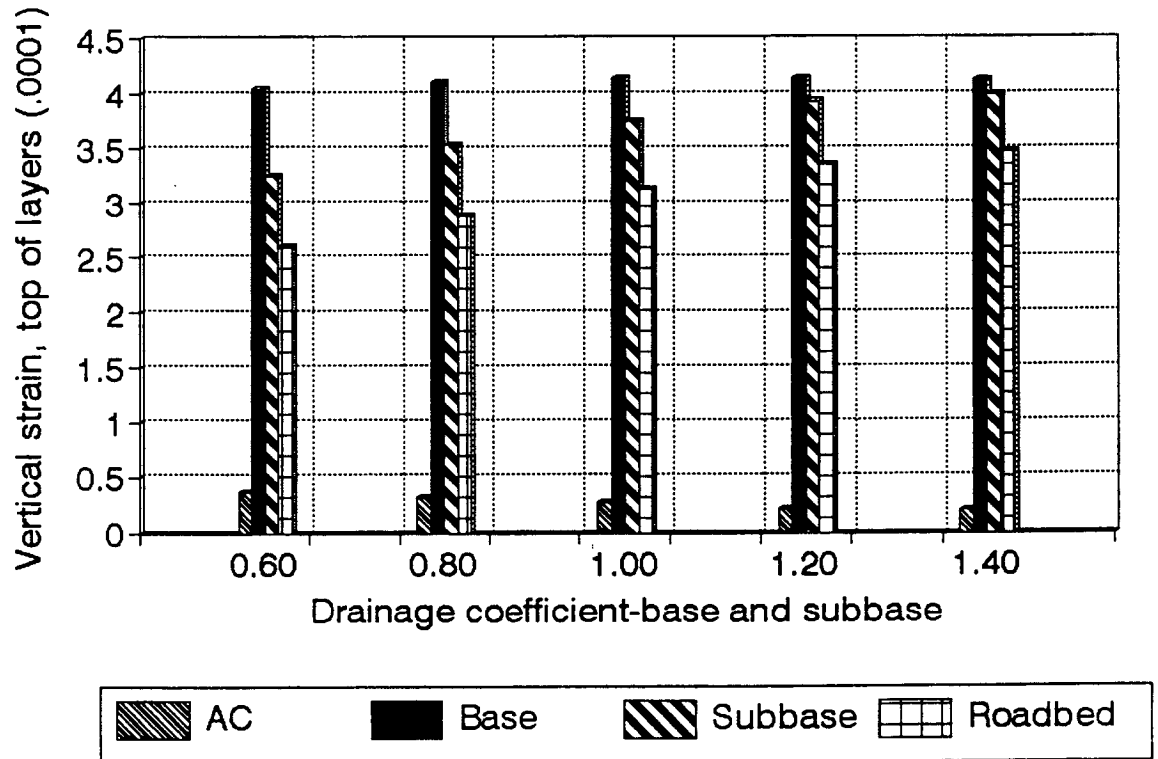


Figure 52. The vertical strain at the top of each layer versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).

The AASHTO 1986

Mechanistic-based modification method

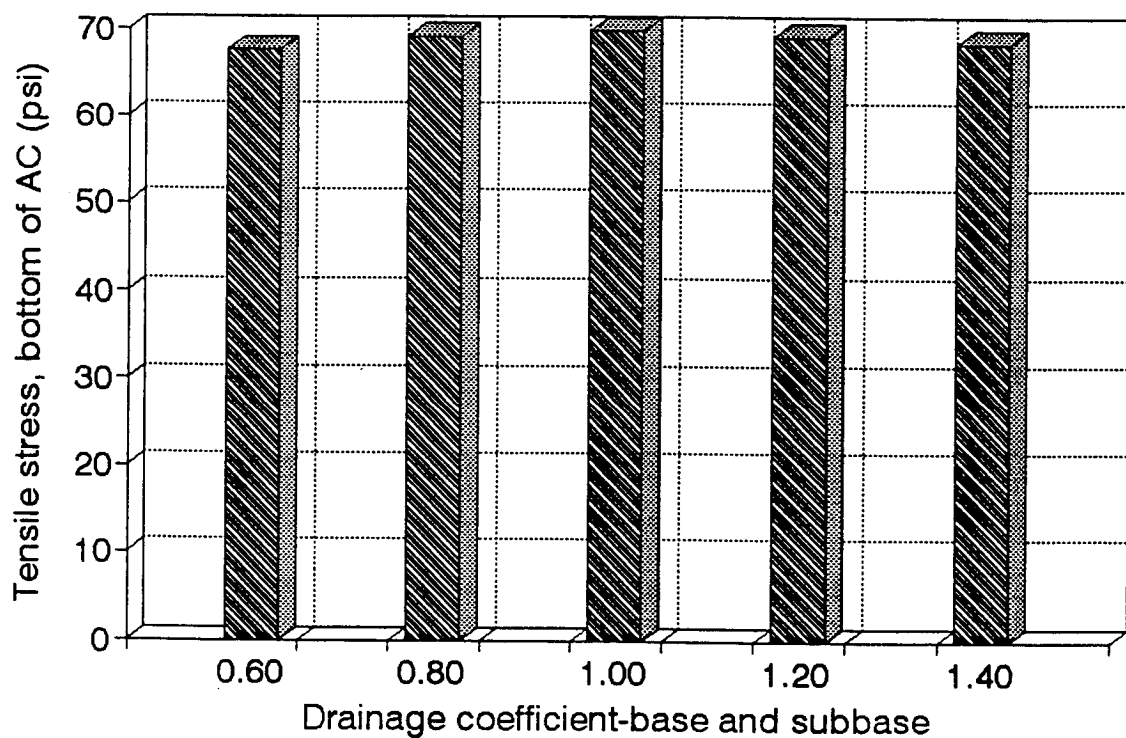


Figure 53. The tensile stress at the bottom of the AC layer versus drainage coefficient (AASHTO 1986, mechanistic-based modification method).

1. **Structural Number** - Figure 54 depicts the structural numbers produced by the 1986 AASHTO design procedure for the three methods (thickness modification, layer coefficient modification, and mechanistic-based modification methods) used to account for the effects of drainage. It can be seen from the figure that while the first two methods produced a constant structural number (required structural capacity) that is independent of the values of the drainage coefficients, the mechanistic-based method produces higher structural number for lower drainage coefficients. That is, as the quality of drainage deteriorates, the required structural capacity of the pavement (expressed in terms of the structural number) increases. The results of the mechanistic-based modification method are reasonable and are expected. From the engineering point of view, lower quality material requires higher structural capacity to accommodate the same traffic level. Hence, based on the structural number values, the mechanistic-based modification of the effects of drainage coefficients represents an improvement over the present AASHTO methods.
2. **Thickness of the AC Layer** - Figure 55 depicts the thicknesses of the AC layer as a function of the values of the drainage coefficients. It can be seen from the figure that:
 - a) The thickness modification method produces a constant AC thickness implying that the level of protection of the base layer is not affected by its drainage quality.
 - b) The AASHTO layer modification and the mechanistic-based modification methods produce variable AC thickness. Higher drainage quality of the base material requires less protection in terms of the asphalt thickness. This is a very reasonable result (lower drainage coefficient values yield lower layer coefficient and hence thicker AC is required to protect the base material). Hence, based on the values of the mechanistic outputs, both drainage modification methods produce more consistent results than the thickness modification method.
3. **Thickness of the Base Layer** - Figure 56 shows the thicknesses of the base layers produced by the 1986 AASHTO thickness design procedure for the three methods accounting for the effects of drainage coefficients. It can be seen from the figure that:
 - a) As is the case for the AC and subbase layers, for a value of the drainage coefficient of 1.0, the three methods lead to the same base thickness.
 - b) The thickness of the base layer decreases as the value of the drainage coefficient increases. Modification of the layer coefficient method causes the largest variation while the mechanistic-based drainage coefficient modification method leads to the smallest variation.

The AASHTO 1986

Comparison of three methods

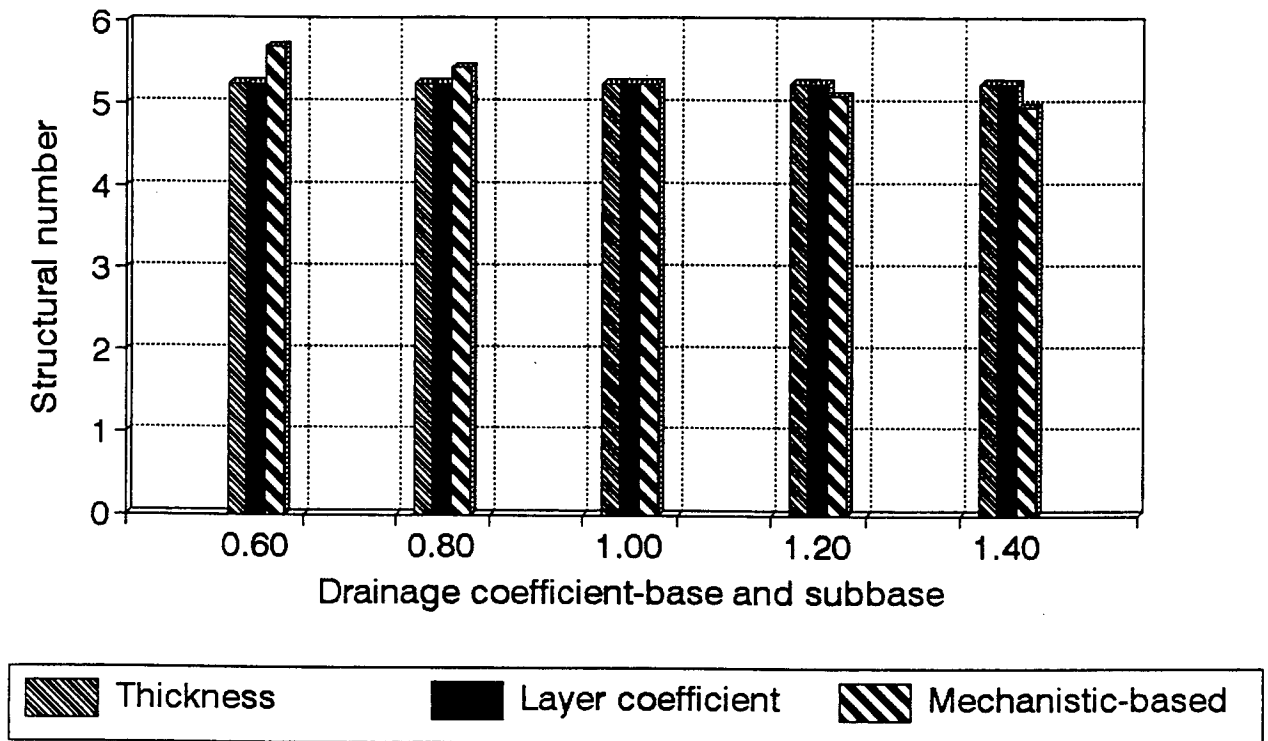


Figure 54. Comparison of the structural number versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

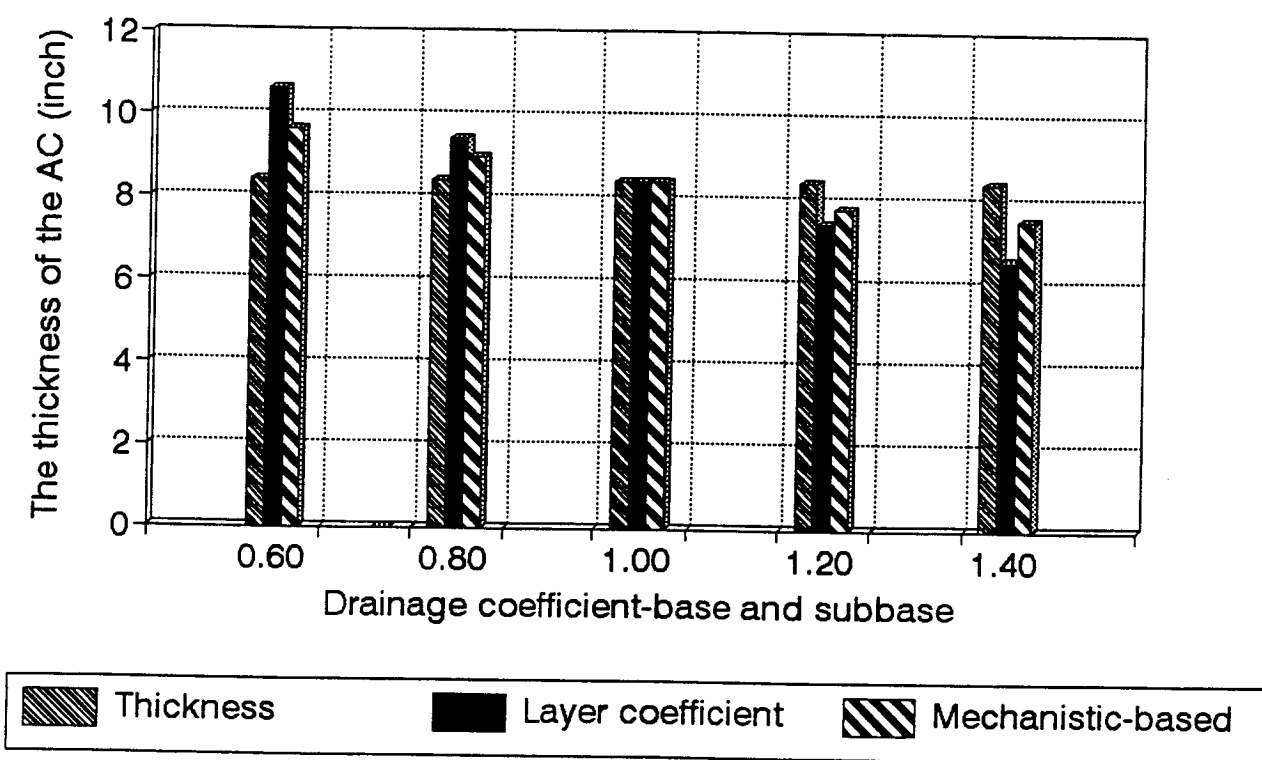


Figure 55. Comparison of the AC layer thicknesses versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

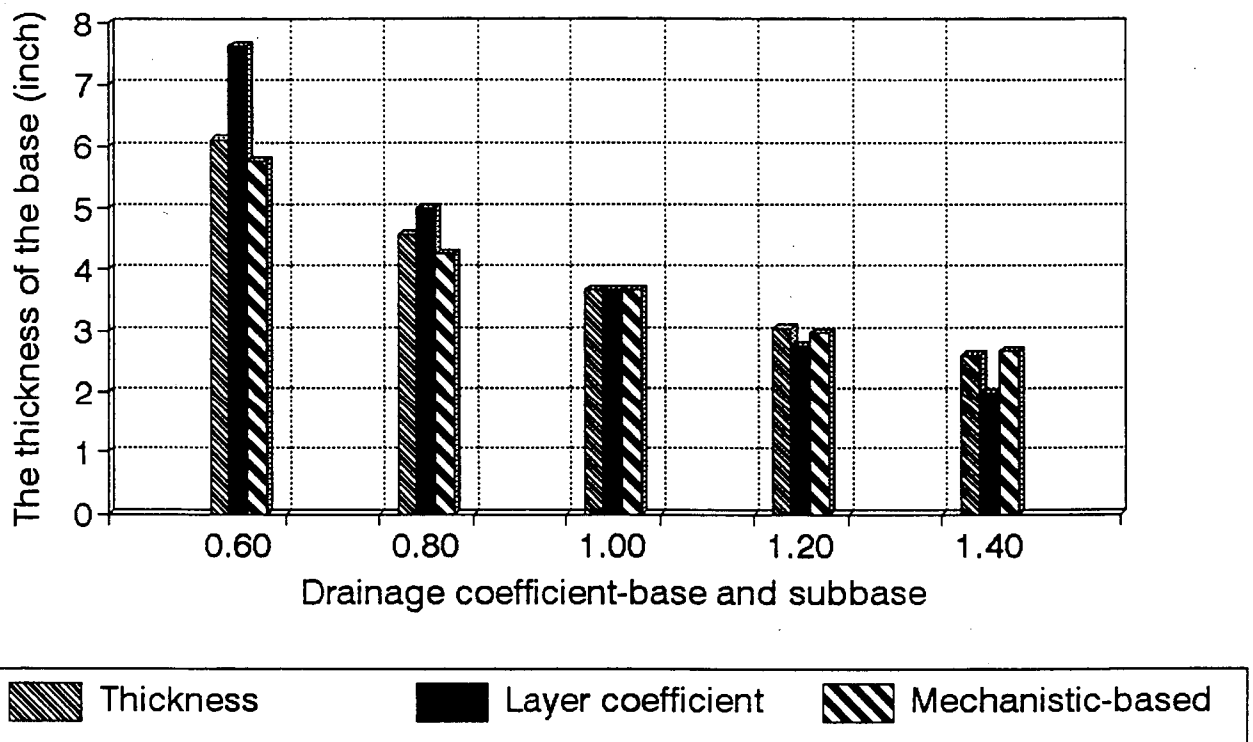


Figure 56. Comparison of the base layer thicknesses versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The validity and engineering interpretations of these observations are discussed below along with the mechanistic responses of the pavement sections.

4. **Thickness of the Subbase Layer** - Figure 57 displays the thicknesses of the subbase layers produced by the 1986 AASHTO thickness design procedure for the three methods accounting for the effects of drainage coefficients. It can be seen from the figure that the thickness modification and the mechanistic-based methods cause the thickness of the subbase layer to decrease as the value of the drainage coefficient increases with the thickness modification method leading to the maximum variations in the thickness of the subbase layer. On the other hand, the layer modification method causes the thickness of the subbase to increase as the value of the drainage coefficient increases.

Once again, the validity and engineering interpretations of these observations are discussed below along with the mechanistic responses of the pavement sections.

5. **Amount of Compression in the Base and Subbase layers and in the Roadbed Soil** - Figures 58, 59, and 60 depict, respectively, the amount of compression in the base, subbase, and roadbed soil as functions of the values of the drainage coefficients. Examination of the figures indicate that after accounting for the effects of drainage coefficients by using the three methods (the thickness modification, the layer coefficient modification, and the mechanistic-based methods), the 1986 AASHTO design procedure produces pavement sections such that:

- a) The amount of compression in the base layer (see figure 58) decreases as the value of the drainage coefficient increases. The thickness modification method causes the largest variation in the amount of compression in the base, while the mechanistic-based method causes the smallest variations. Since the objective of the design is to produce pavement sections that will be exposed to the same level of damage (or the same level of protection), it implies that the mechanistic-based method produces more consistent results relative to the effects of drainage coefficients.
- b) For the thickness modification method, the amount of compression in the subbase layer (see figure 59) decreases as the value of the drainage coefficient increases. On the contrary, the layer coefficient modification method causes the amount of compression in the subbase layer to increase as the value of the drainage coefficient increases. Finally, the mechanistic modified method leads to pavement cross sections whereby the amount of compression in the subbase is almost constant and independent of the drainage coefficient. This implies that the mechanistic-based method influences the 1986 AASHTO design procedure appropriately to produce more consistent results.

The AASHTO 1986

Comparison of three methods

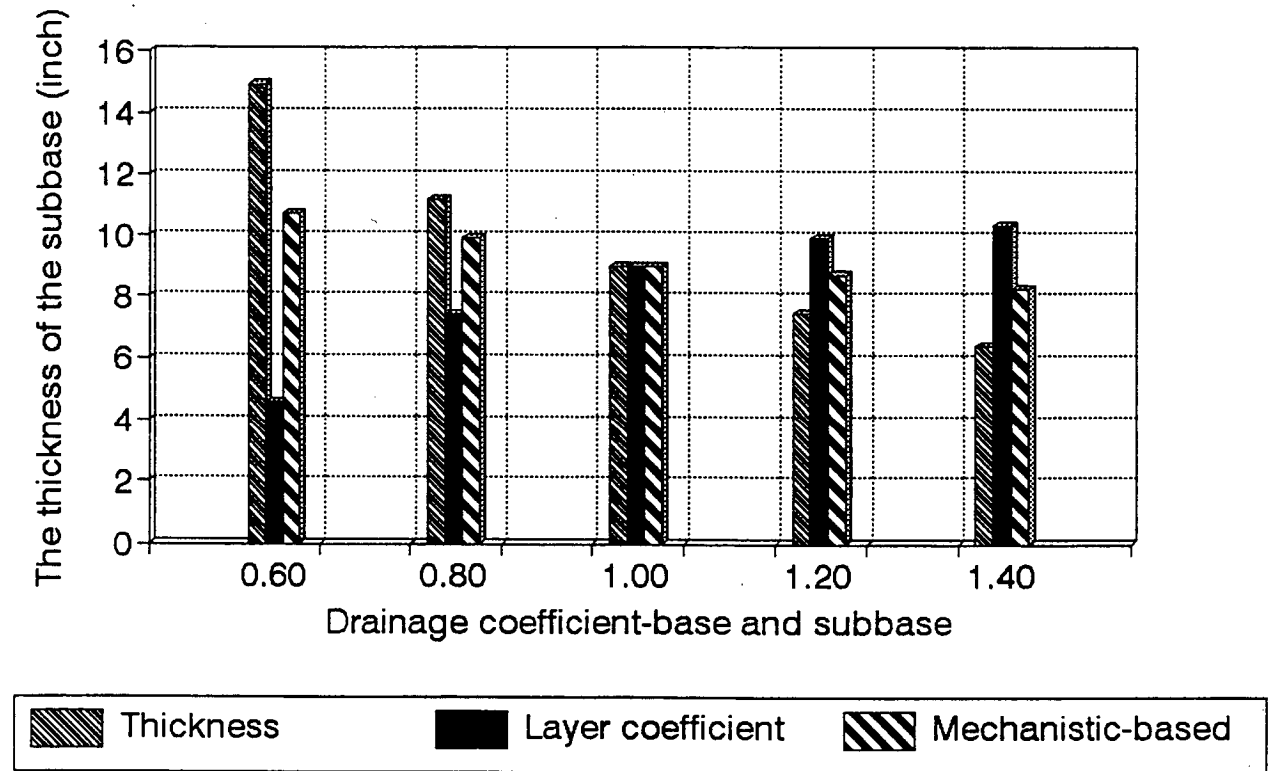


Figure 57. Comparison of the subbase layer thicknesses versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

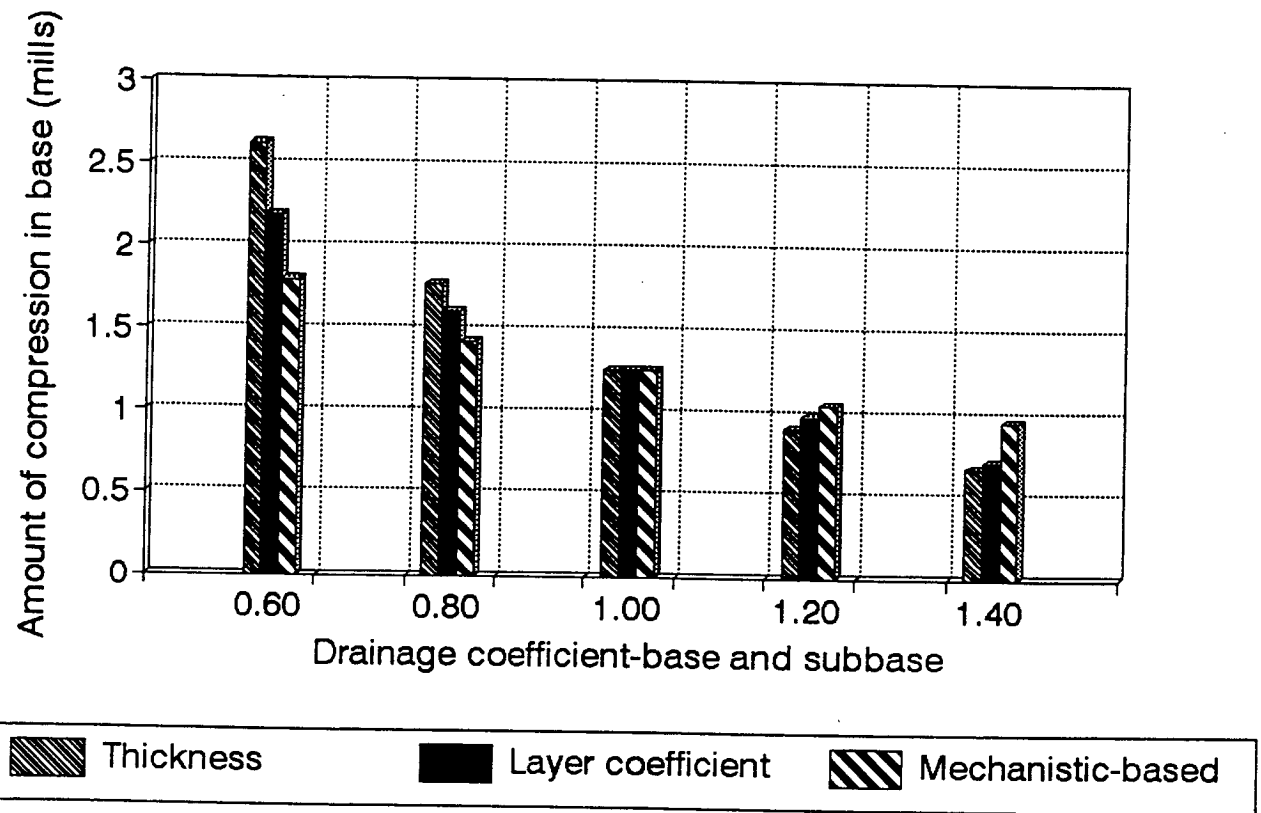


Figure 58. Comparison of the amount of compression in the base layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

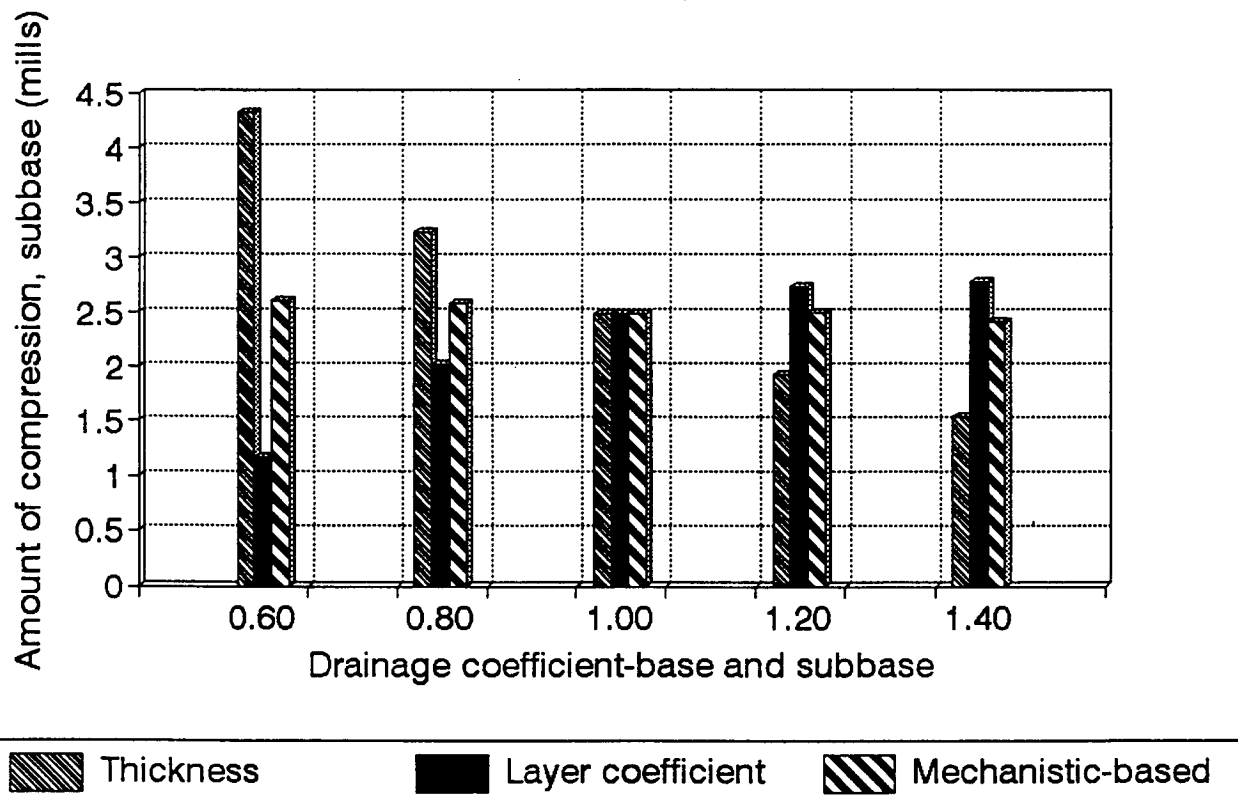


Figure 59. Comparison of the amount of compression in the subbase layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

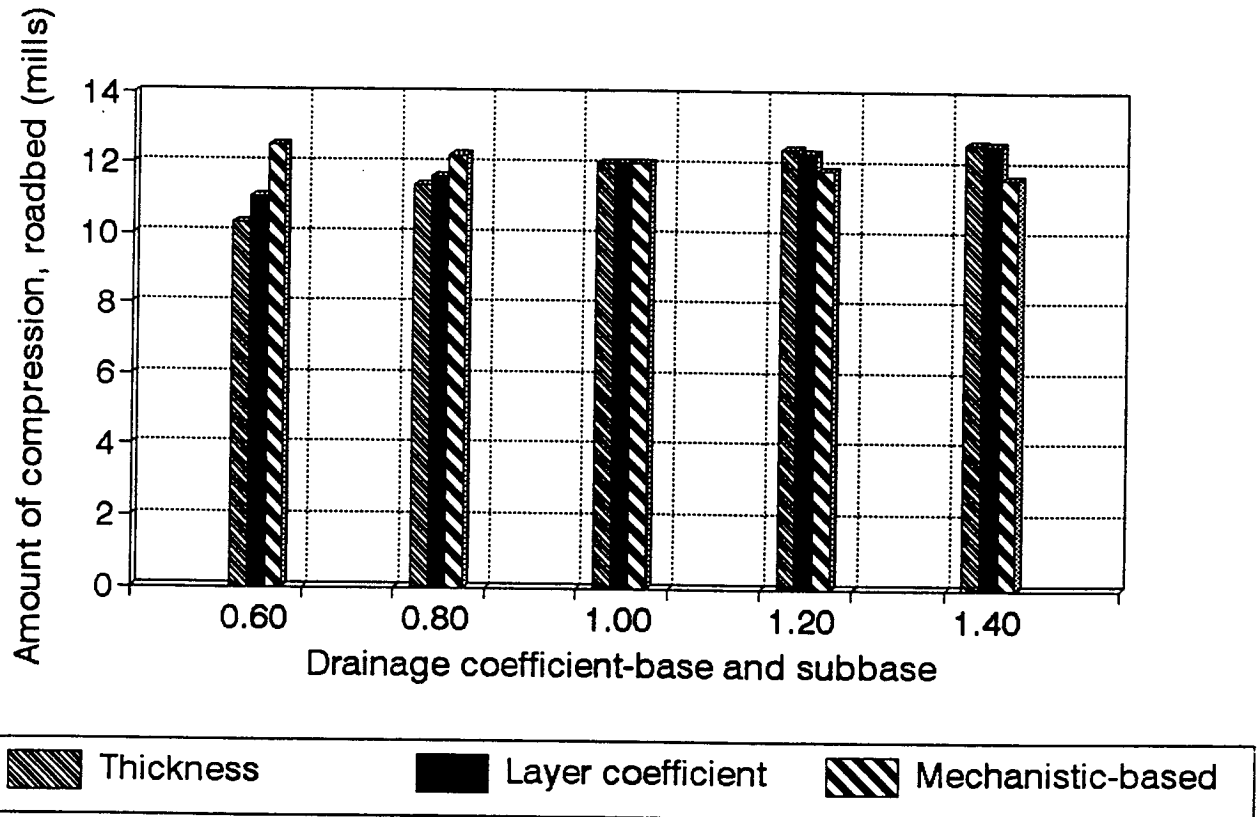


Figure 60. Comparison of the amount of compression in the roadbed versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

- c) The three modification methods lead the 1986 AASHTO design procedure to yield pavement cross-sections with almost equal amount of compression (equal damage) in the roadbed soil (see figure 60). Although, the mechanistic-based method causes slightly less variations in the roadbed compression than the other two methods.

6. **Vertical Strain at the Top of the AC, Base, and Subbase Layers, and at the Top of the Roadbed Soil** - Figures 61, 62, and 63 show, respectively, the amount of the vertical strain induced at the top of the AC, base, and subbase layers, and at the top of the roadbed soil as functions of the values of the drainage coefficients. Examination of the figures indicate that after accounting for the effects of drainage coefficients by using the three methods (the thickness modification, the layer coefficient modification, and the mechanistic-based methods), the 1986 AASHTO design procedure produces pavement sections such that:

- a) For the thickness modification method, the vertical strain at the top of the AC (see figure 61) increases as the drainage coefficient increases. On the contrary, the other two methods cause a decrease in the vertical strain with increasing values of the drainage coefficient. Recall that, for all design alternatives, the modulus of the AC is constant and it is equal to 300,000 psi. Thus, different vertical strain levels imply that the pavement will receive different levels of damage. Presumably, the five pavement alternatives were designed to carry the same amount of traffic and to have the same performance period. The above scenario hints that the three methods used to account for the effects of drainage quality are not absolutely accurate. Further examination of figure 61 indicates that, as the maximum variation in the vertical strains from one pavement section to another is about 425 percent for the modified thickness method, about 230 percent for the layer modification method, and about 85 percent for the mechanistic-based method. Consequently, the latter method produces more consistent results.
- b) The vertical strains at the top of the base layer (see figure 62) is almost constant for the layer coefficient modification and the mechanistic-based modification methods. Hence, the two methods are more consistent than the thickness modification method.
- c) For all three methods, the vertical strains at the top of the subbase layer and top of the roadbed soil (see figures 63 and 64) vary with the values of the drainage coefficient. It can be seen that, the thickness modification method produces the largest variation (about 57 percent) while the mechanistic-based method produces the least (about 21 percent).

The AASHTO 1986

Comparison of three methods

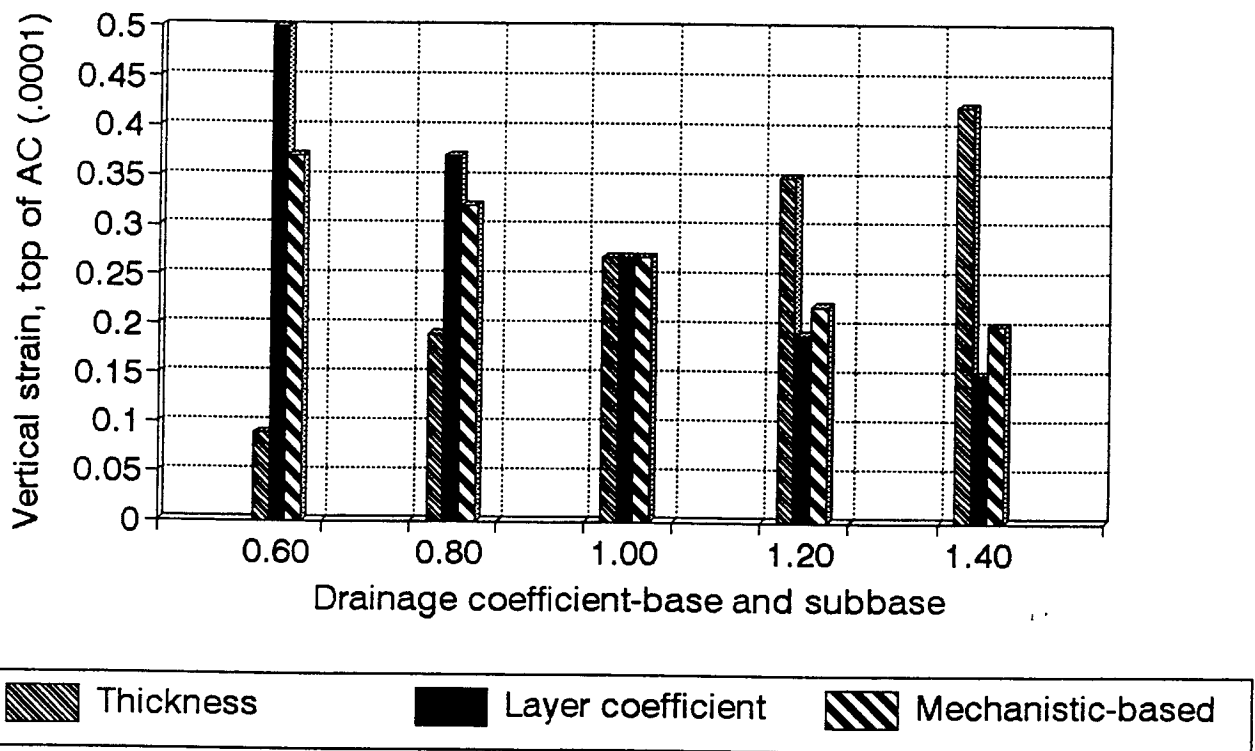


Figure 61. Comparison of the vertical strain at the top of the AC layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

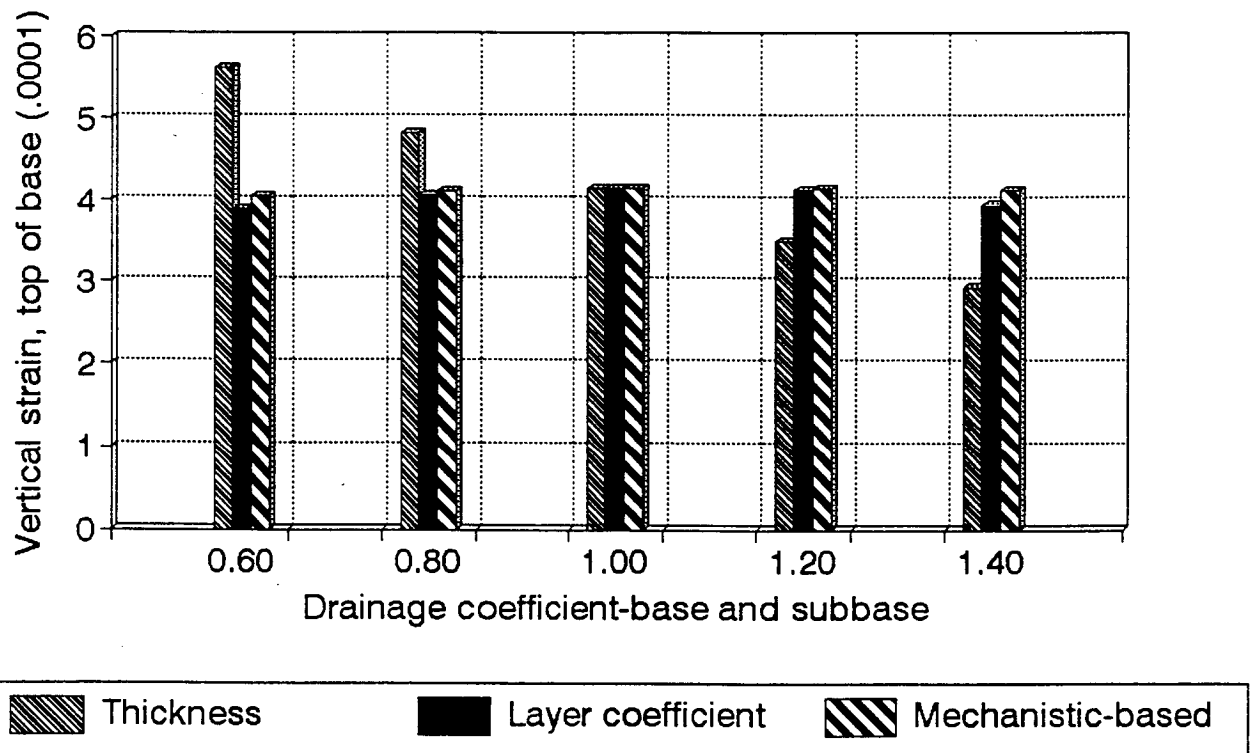


Figure 62. Comparison of the vertical strain at the top of the base layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

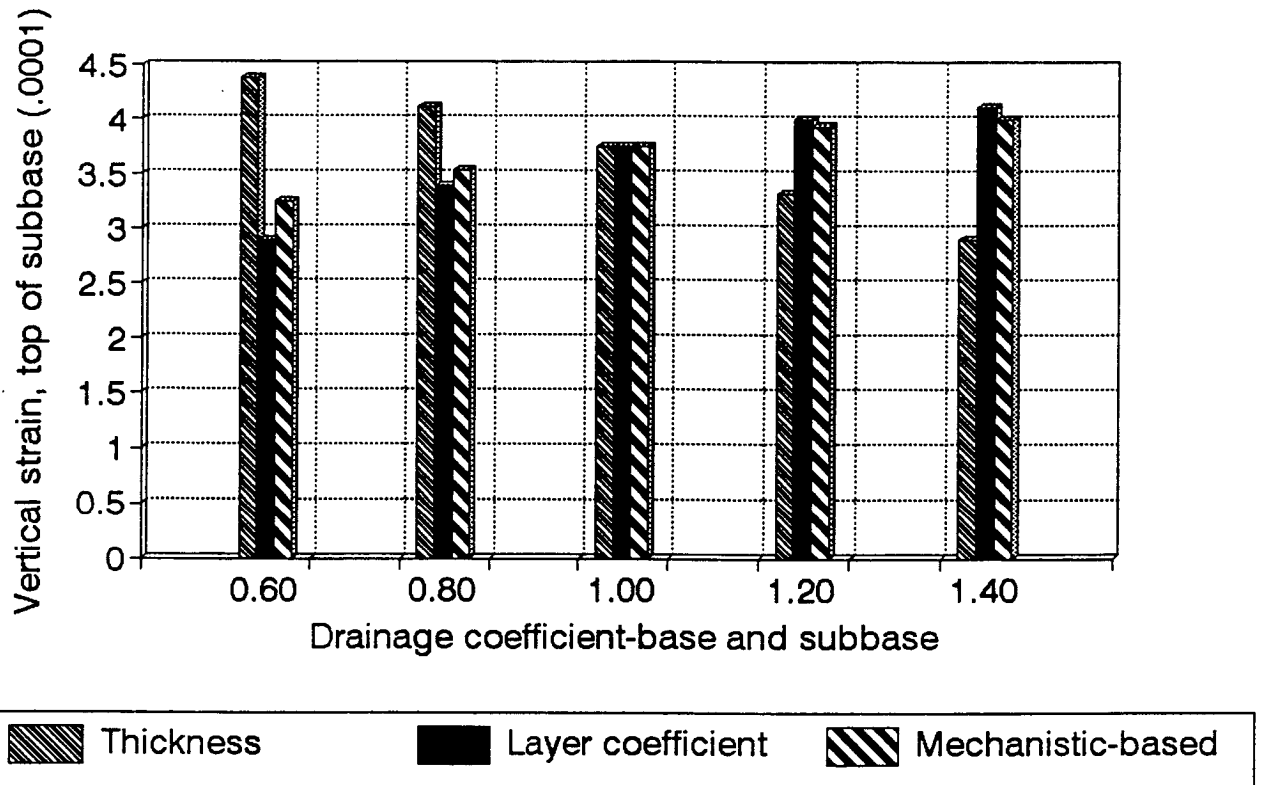


Figure 63. Comparison of the vertical strain at the top of the subbase layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

The AASHTO 1986

Comparison of three methods

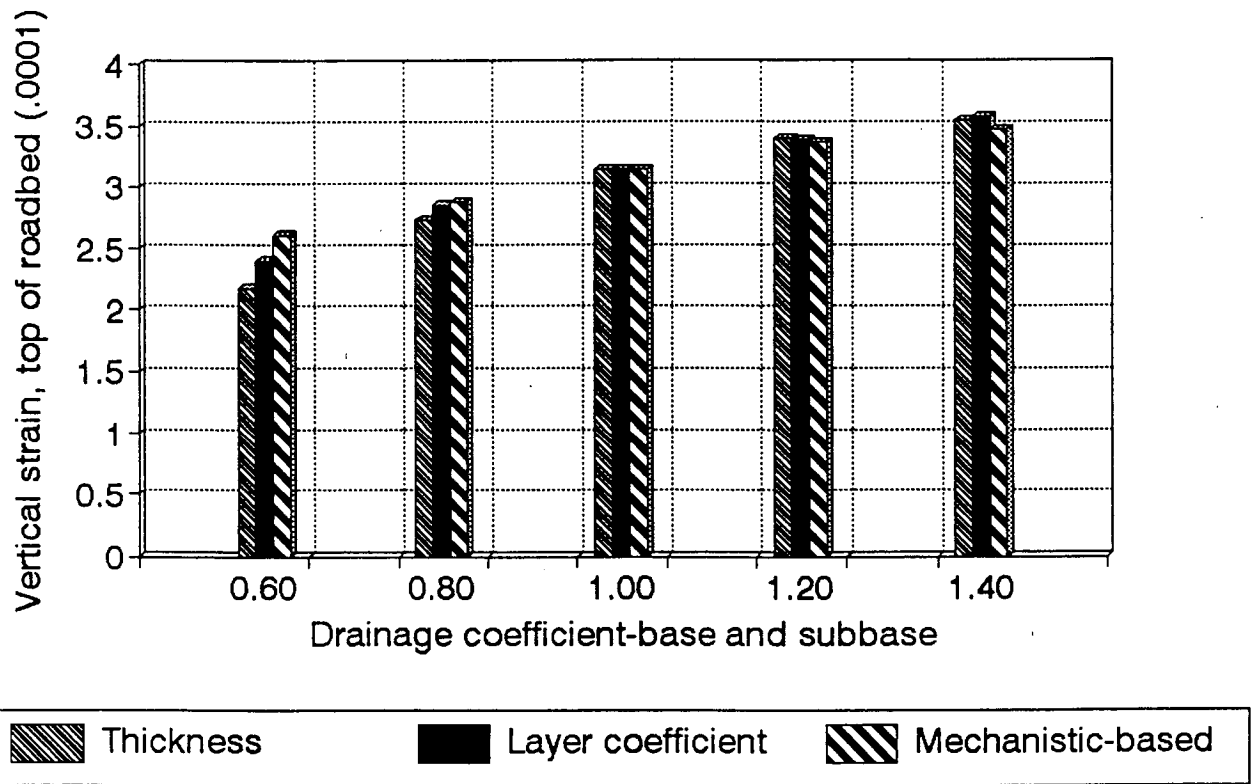


Figure 64. Comparison of the vertical strain at the top of the roadbed soil versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

7. **Tensile Stress at the Bottom of the AC Layer** - Figure 65 shows the tensile stresses induced at the bottom of the AC layers for the five pavement alternatives and for the three methods that account for the effects of the drainage coefficient in the AASHTO design procedure. It can be seen that the layer coefficient modification and the mechanistic-based modification methods lead to very similar results and minimum variations in the tensile stress (about 10 percent). The other method causes a variation in the tensile stress of the order of about 70 percent. Thus, the former methods produce more consistent results.

4.1.3 Alternative Perspective of the AASHTO Drainage Coefficient

The above discussion indicates that the effects of the drainage coefficient on the 1986 AASHTO design procedure varies from one method to another. Further, the mechanistic-based method provides more consistent results than the other two methods. Hence, the existing 1986-AASHTO Design Guide should be modified and it should be made clear that modifying the layer thicknesses is **NOT** the true intention of the guide. In addition, the DNPS86 computer program and perhaps DARWIN program should be modified. The layer coefficient modification method represents no change to the existing guide, rather, the guide needs some clarification relative to that section. The mechanistic-based method requires minimum changes to the existing guide.

Another perspective relative to the effects of the drainage coefficients on the pavement design procedure is that, the effects of the drainage quality can be presented in terms of reduction in the pavement Service Life (SL). Figure 66 depicts the AASHTO structural number as a function of the design 18-kip ESAL for three roadbed soils (1, 5 and 10 ksi moduli values). The three curves were obtained for a design period of 20 years, a design reliability of 95 percent, an overall standard deviation of 0.45, and a serviceability loss of 1.7 points. Figure 67 depicts the percent gain or loss in the pavement service life as a function of the drainage coefficients. The data for figure 67 were obtained from figure 66. The use of the two figures is illustrated in example 2 below.

EXAMPLE 2 - Pavement section 162 of figure 1 is designed by using the AASHTO method, the material properties listed below, a design reliability of 95 percent, an overall standard deviation of 0.45, a performance period of 20 years, a total 18-kip ESAL of 20,000,000, and a total loss of serviceability of 1.7 PSI.

Layer	Modulus (ksi)	Layer Coefficient	Drainage Coefficient
AC	300	0.38	1.0
Base	40	0.17	1.0
Subbase	25	0.16	1.0
Roadbed	10	N/A	N/A

The AASHTO 1986

Comparison of three methods

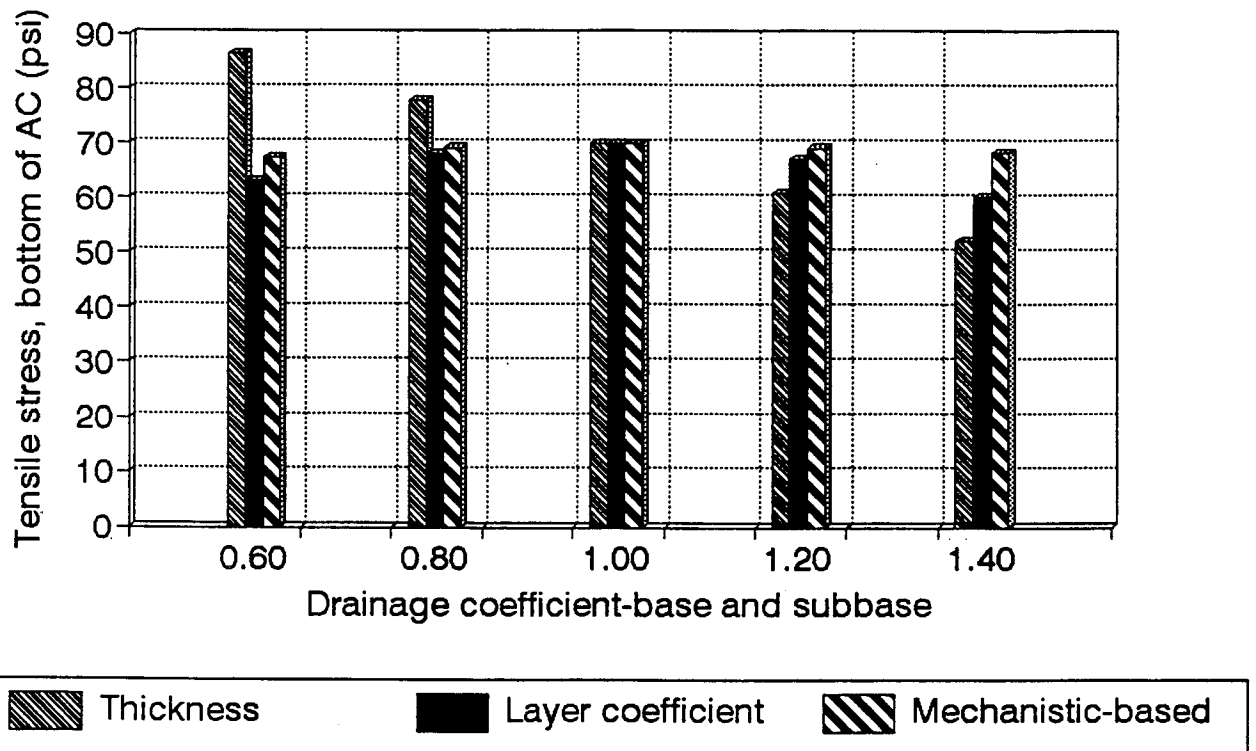


Figure 65. Comparison of the tensile stress at the bottom of the AC layer versus drainage coefficient produced by the 1986 AASHTO design procedure and the three drainage coefficient modification methods.

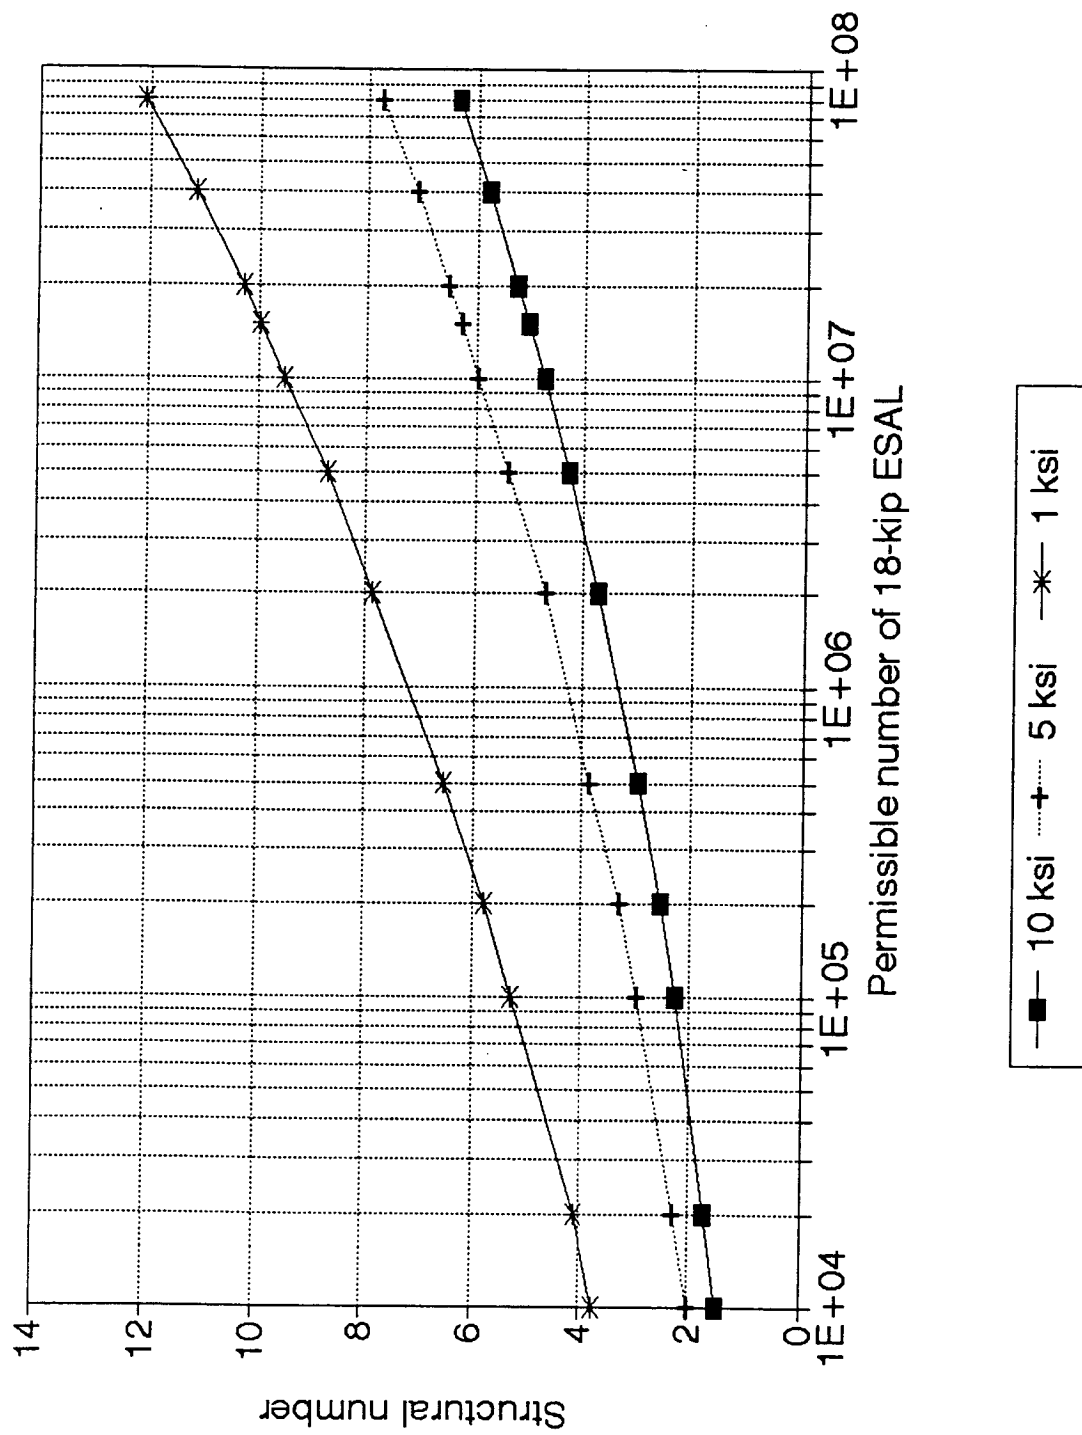


Figure 66. Effective structural number versus the permissible number of 18-kip ESAL.

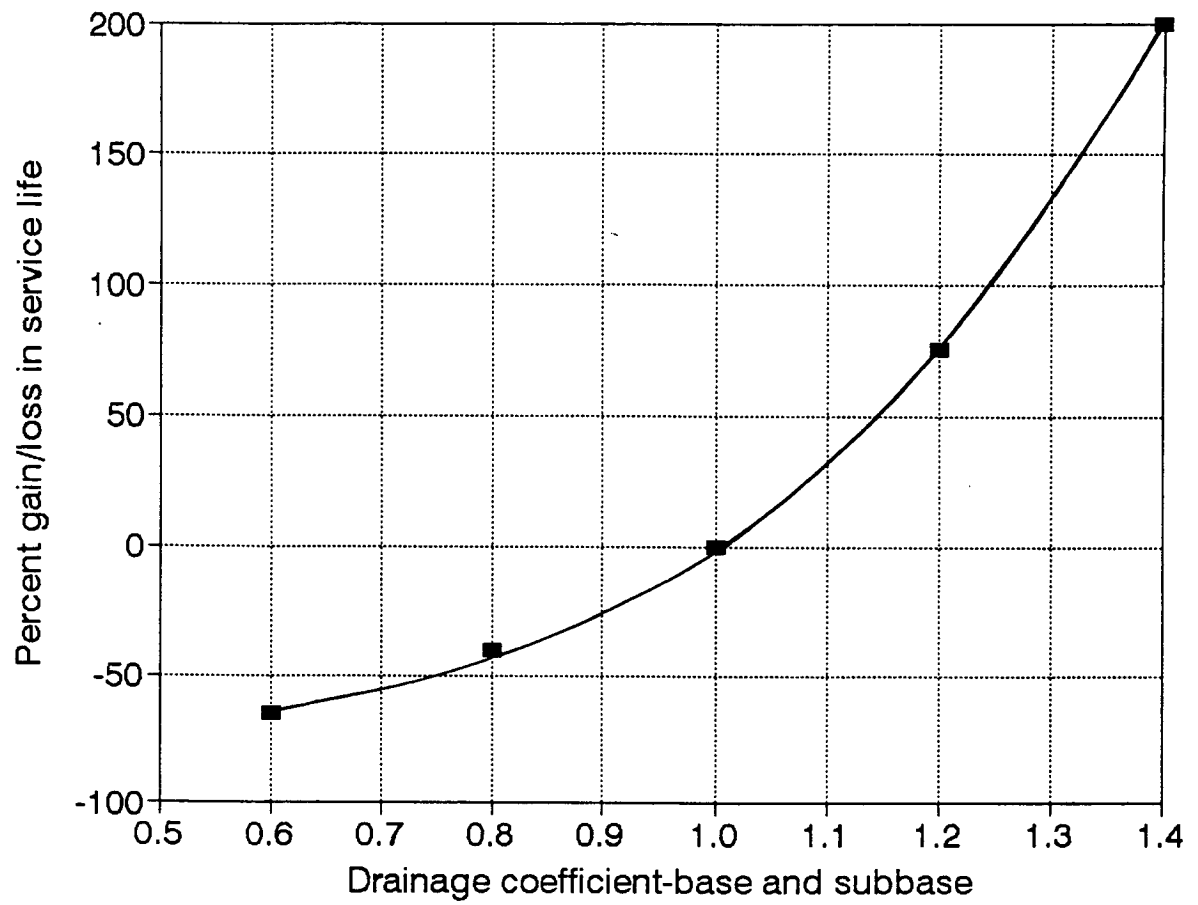


Figure 67. Percent gain and loss in pavement service life versus drainage coefficient.

The AASHTO output for layer thicknesses is tabulated below.

Layer type	Layer thickness (inch)
AC	8.41
Base	3.66
Subbase	8.96

Calculate the percent gain or loss in the pavement service life due to drainage quality and for drainage coefficients of the base and subbase layers of 0.6, 0.8, 1.2, and 1.4.

SOLUTION - After designing the pavement section by using the 1986 AASHTO Design Guide and drainage coefficient of the base and subbase layers of 1.0, the effective structural number of the pavement for the various values of the drainage coefficients can be calculated by using the following equation:

$$SN = a_1D_1 + a_2D_2m_2 + a_3D_3m_3$$

The values of the structural number for the various drainage coefficients are tabulated below.

Drainage Coefficient	Calculation	Effective SN
0.6	$(8.41)(0.38) + (3.66)(0.17)(0.6) + (8.96)(0.16)(0.6) =$	4.43
0.8	$(8.41)(0.38) + (3.66)(0.17)(0.8) + (8.96)(0.16)(0.8) =$	4.84
1.0	$(8.41)(0.38) + (3.66)(0.17)(1.0) + (8.96)(0.16)(1.0) =$	5.25
1.2	$(8.41)(0.38) + (3.66)(0.17)(1.2) + (8.96)(0.16)(1.2) =$	5.66
1.4	$(8.41)(0.38) + (3.66)(0.17)(1.4) + (8.96)(0.16)(1.4) =$	6.07

For each value of the drainage coefficient, the permissible number of 18-kip ESAL can be obtained from figure 66. To obtain the permissible number of 18-kip ESAL for a drainage coefficient of 0.6 and a structural number of 4.43, simply enter the vertical axis (the structural number axis) of figure 66 at the SN value of 4.43, draw a horizontal line to intersect the curve labeled 10 ksi roadbed soil modulus, draw a vertical line to intersect the horizontal axis and read the permissible number of 18-kip ESAL as 7,000,000. Likewise, the permissible number of 18-kip ESAL for an SN of 4.84 is 12,000,000. The permissible numbers of 18-kip ESAL for the other SN values of example 2 are tabulated below along with the calculation of the percent gain and loss of the pavement service life.

Drainage Coefficient	Effective Structural Number	Number of Permissible 18-kip ESAL	Percent gain and loss in the pavement service life in terms of ESAL and relative to the service life for a drainage coefficient of 1.0	
			Percent gain	Percent loss
0.6	4.43	7,000,000	-	65.0
0.8	4.84	12,000,000	-	40.0
1.0	5.25	20,000,000	0.0	0.0
1.2	5.66	30,000,000	75.0	-
1.4	6.07	60,000,000	200.0	-

It should be noted that, the percentages of gain and loss in service life of the previous example were calculated relative to the pavement section designed with drainage coefficient of 1.0. Further, a drainage coefficient of 1.0 implies that the quality of drainage is fair and the pavement is expected to be exposed 5 percent of the time to moisture levels approaching saturation.

This new perspective implies that, regardless of the actual values of the drainage coefficient) the 1986 AASHTO Design Guide would produce layer thicknesses for a unit value of the drainage coefficient. The Guide will also advise the user that if the actual drainage coefficient is improved then the pavement is expected to gain certain percentages of its service life.

CHAPTER 5

EVALUATION OF THE AASHTO CONCEPT OF LOSS OF SERVICEABILITY DUE TO SWELLING SOILS AND FROST ACTION

5.1 PHASE 5 - THE AASHTO CONCEPT OF LOSS OF SERVICEABILITY DUE TO ENVIRONMENTAL FACTORS

5.1.1 Serviceability Loss

In general, the performance of asphalt surfaced pavements is affected by various factors. These factors can be divided into several categories as follows:

1. Material factors including the engineering and physical properties and characteristics of the various materials in a pavement structure.
2. Design factors including traffic volume and load, design reliability, accuracy of the material properties, design serviceability loss, drainage design, type of roadbed soil, and the type of pavement analysis and/or design model used.
3. Construction factors including construction practices and procedures, existing standards, and quality control.
4. Environmental factors including low and high temperatures, freezing index, number of freeze-thaw cycles, moisture (rainfall intensity and duration), and solar radiation.

The 1986 AASHTO Design Guide accounts for the effects of the environmental factors in several ways. These include:

1. Drainage coefficient for the presence or absence of moisture in the base and subbase materials.
2. Effective modulus of the roadbed soil where the soil should be tested under various moisture conditions (simulating the moisture in the field for every month of the year). The effective resilient modulus of the roadbed soil is the weighted average (based on a damage factor) of all test values.
3. Serviceability loss due to swelling soil and frost and heave.

In this chapter, the 1986 AASHTO concept relative to serviceability loss due to swelling soil and frost and heave is addressed.

The 1986 AASHTO concept of pavement serviceability and pavement performance is that, for any performance period, the total loss in pavement serviceability is the sum of the

losses due to traffic and due to environmental factors (swelling soil and frost heave). Hence, the total serviceability loss due to environmental factors is the sum of the losses due to swelling soil and frost heave. Figure 68 depicts the AASHTO concept of the environmental serviceability loss as a function of time. It should be noted that the AASHTO methods for predicting the serviceability loss due to swelling and due to frost heave are based on their effects on the longitudinal profile of the pavement surface.

5.1.2 Roadbed Swelling

Expansive roadbed soils may be found in soil deposits of fine material that contain appreciable amount of clay minerals such as montmorillonite and/or illite. Expansive soils adsorb water when they are decompressed, such as in excavation and/or when they come in contact with a source of water. These conditions cause the soil to expand appreciably in volume.

The compressibility characteristics and swell potential of expanding soils have a practical importance to the pavement engineer. Pavement constructed over expansive roadbed soils are likely to experience serviceability losses due to pavement roughness and other types of distress caused by the swelling soils.

The swell potential and the compressibility of expansive soils can be evaluated in the laboratory by performing odometer tests. The tests should be conducted on soil specimens having at least two limiting water contents: 100 percent saturation and the minimum possible water content that will be experienced in the field. The tests will yield the limiting values of the compression and expansion properties of the soils.

The rate and magnitude of serviceability loss due to swelling soil is affected by three variables: swell rate constant, potential vertical rise of the soil, and the probability of swelling. Fine materials such as clays and silts have higher swelling potential than coarser soils. The amount and rate of swell are functions of the availability of moisture and the types of mineral in the soil. Good drainage and/or a cut-off drainage blanket will minimize the swell potential.

5.1.3 Frost and Heave

The term "frost-susceptibility" implies the tendency of a soil to hold water and undergo volume changes when it is subjected to freezing temperatures. Hence, a frost-susceptible soil is any roadbed or base course soil that has a relatively low permeability and a high water holding capacity. The term "frost heave" refers to the raising of a portion of a pavement as a direct result of the formation of ice crystals and ice lenses in the underlying frost-susceptible soil.

Frost susceptible soils include all inorganic soils that contain more than 12 percent of fine materials (less than 0.02 mm). The degree of frost susceptibility of a soil is a function of its fine content, permeability, and water holding capacity expressed in terms of the soil void ratio

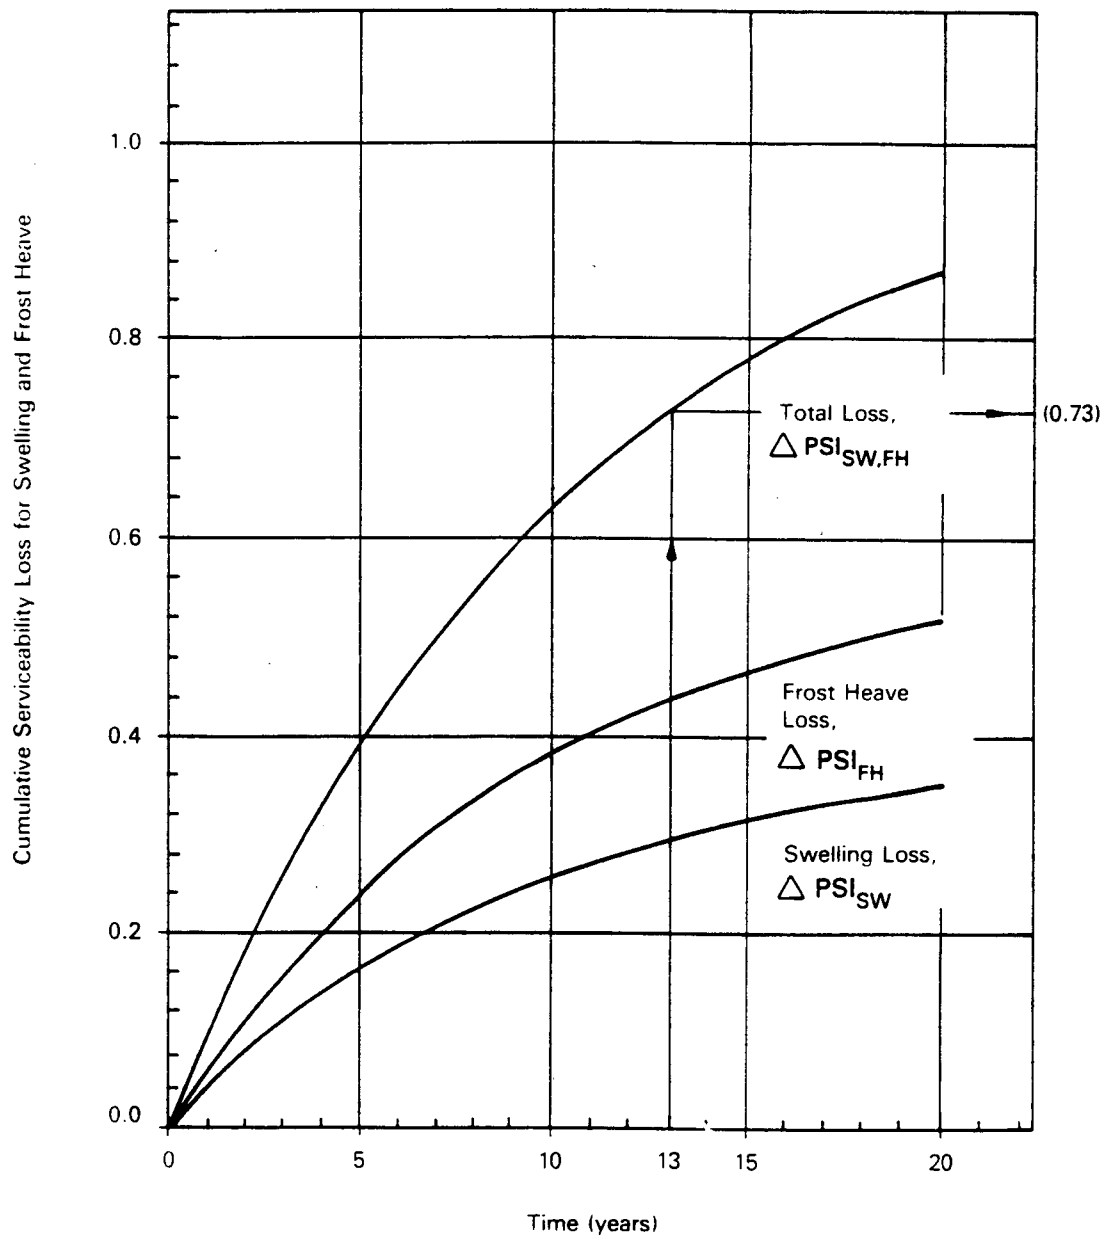


Figure 68. A conceptual example of the environmental serviceability loss versus time graph that may be developed for specific location ⁽⁸⁾.

or porosity. The amount of frost heave experienced by a pavement system is affected by the presence or absence of drainage systems and their quality. Frost heave adversely affects pavement serviceability and service life. In general, deeper frost penetrations cause higher serviceability loss.

Frost heave of roadbed soils or any other pavement layer affects the pavement structure in two phases as follows:

1. As the temperature drops below freezing during the late Fall and early Winter seasons, water under the pavements (in the base or subbase layers and/or in the roadbed soil) expands by about 9 percent in volume as it freezes in the form of ice lenses. This causes an uneven heave in the pavement surface which results in a higher pavement roughness. During the Winter season, if temperature stayed below freezing, water from the ground water table will travel upward by means of capillary action or in the form of vapor, will coat the ice lenses, and it will freeze causing growth in the ice lenses and more uneven pavement heave.
2. During the Spring season (thaw period), ice will start to melt at the top of the ice lenses due to above freezing temperatures causing uneven settlement in the pavement surface, and at the bottom of the ice lenses due to the interior heat of the earth. The melted water at the top of the ice lenses, since it is underlain by impermeable ice, will accumulate beneath the pavement surface and often will drain to the surface through pavement cracks. Thus, the pavement surface which is practically supported by a soft soupy layer (mainly water), may break-up under traffic causing frost boils and potholes. In addition, this melted water may refreeze at night-time causing new additional heave and, perhaps, lifting the pavement off its foundation.

Nevertheless, as is the case for roadbed swelling, the rate and magnitude of serviceability loss due to frost heave is affected by three variables: frost heave rate, probability of frost heave, and the maximum potential of serviceability loss due to frost heave. Once again, fine materials such as clay and silt have higher frost-heave potential than coarser soils. The amount and rate of frost heave are functions of the availability of moisture, freezing temperatures, and the types of mineral in the soil. Good drainage system decreases frost heave potential.

5.2 EVALUATION OF THE AASHTO CONCEPT OF LOSS OF SERVICEABILITY

As stated early, the 1986 AASHTO design procedure accounts for the effects of swelling soils and frost heave by dividing the total loss of serviceability (loss during the pavement performance period) in terms of the Pavement Serviceability Index (PSI) into two components as follows:

1. Loss of serviceability due to traffic.
2. Loss of serviceability due to swelling and frost heave.

In addition, the 1986 AASHTO Design Guide provides nomograph and charts for the estimation of the serviceability loss due to swelling and frost heave.

The proper evaluation of the AASHTO loss of serviceability concept due to swelling and frost heave requires two sets of data as follows:

1. Laboratory data concerning the soil swelling and frost heave properties and their effects on the elastic and plastic properties of the soils.
2. Field data concerning the behavior and performance of pavement structures supported on roadbed soils having swell and frost heave potentials.

Unfortunately, such data are not available in the SHRP data base. Consequently, the loss of serviceability concept is evaluated herein by assuming several values of the loss of serviceability due to swelling and frost heave.

Table 16 provides a list of two pavement sections (section 162 and 160, see figure 1) that were used in the evaluation. For each section, the material properties and the design parameters used in this evaluation are provided in table 16.

Nevertheless, for each pavement section, the material properties and the design parameters were used as inputs to the 1986 AASHTO design procedure to arrive at the layer thicknesses and the required pavement structural numbers for five values of the loss of serviceability due to swelling and frost heave. These values of PSI loss are listed in column 2 of table 17. The output of the AASHTO design procedure in terms of the required structural number (SN) for each design alternative is listed in column 3 of the table. Column 4 provides a list of the percent increase of the SN relative to the SN value of the pavement with no swelling and frost heave potential.

Figure 69 depicts the required structural number of the pavements of sections 162 and 160 as a function of the serviceability loss due to swelling and frost heave. It can be seen that higher serviceability losses due to environmental factors yield higher required pavement structural number (thicker pavements). Figure 70 shows the incremental percent increases of the SN as a function of the PSI loss due to environmental factors for pavement sections 162 and 160. It can be seen that the incremental percent increase is a function of the PSI loss and they are different from one section to another. Since the only difference between pavement sections 160 and 162 is the number of 18-kips ESAL (20,000,000 ESAL for section 162 and 5,000,000 ESAL for section 160), one can conclude that the incremental increase in the SN is traffic volume dependent. This implies that, the level of required protection (the amount of increase in the pavement thickness) for pavements having the same swell and frost heave potentials depends on the number of 18-kip ESAL expected to traffic that pavement. That is the environmental damage is traffic dependent. This may be true because of the interaction between the two damages (that due to environment and that due to traffic). However, the AASHTO loss of serviceability concept is a linear concept, the total loss of pavement serviceability is the sum

Table 16. The required pavement structural numbers for various values of loss of serviceability due to swelling and frost heave conditions.

Pavement Section Number	PSI Loss Due to Swelling and Frost-Heave	Required Pavement Structural Number	Percent Increase in Structural Number	Equivalent Roadbed Modulus (psi)	Percent Decrease in Roadbed Modulus
162	0.00	5.25	0.00	10000.00	0.00
	0.30	5.56	5.90	8400.00	16.00
	0.60	5.91	12.57	6855.00	31.45
	0.90	6.64	26.48	4675.00	53.25
	1.20	7.71	46.86	2800.00	72.00
160	0.00	4.29	0.00	10000.00	0.00
	0.30	4.52	5.36	8600.00	14.00
	0.60	4.87	13.52	6910.00	30.90
	0.90	5.41	26.11	5020.00	49.80
	1.20	6.36	48.25	2975.00	70.25

Table 17. Material properties and design parameters of pavement sections 160 and 162.

Pavement Section Number	Pavement Layer	Layer Modulus (ksi)	Initial (Terminal) PSI	Traffic Volume (10 ⁶) ESAL	Design Reliability	Overall Standard Deviation	Design Alternatives for Various Loss of PSI Due to Swelling and Frost Heave		
							Loss of PSI due to Traffic	Loss of PSI due to Swelling & frost heave	Layer Structural Number
162	AC	300	4.2 (2.5)	20	0.95	0.45	1.7	0.0	5.25
	Base	40					1.4	0.3	5.56
	Subbase	25					1.1	0.6	5.91
	Roadbed	10					0.8	0.9	6.64
							0.5	1.2	7.71
	AC	300	4.2 (2.5)	5	0.95	0.45	1.7	0.0	4.29
	Base	40					1.4	0.3	4.52
	Subbase	25					1.1	0.6	4.87
	Roadbed	10					0.8	0.9	5.41
							0.5	1.2	6.36

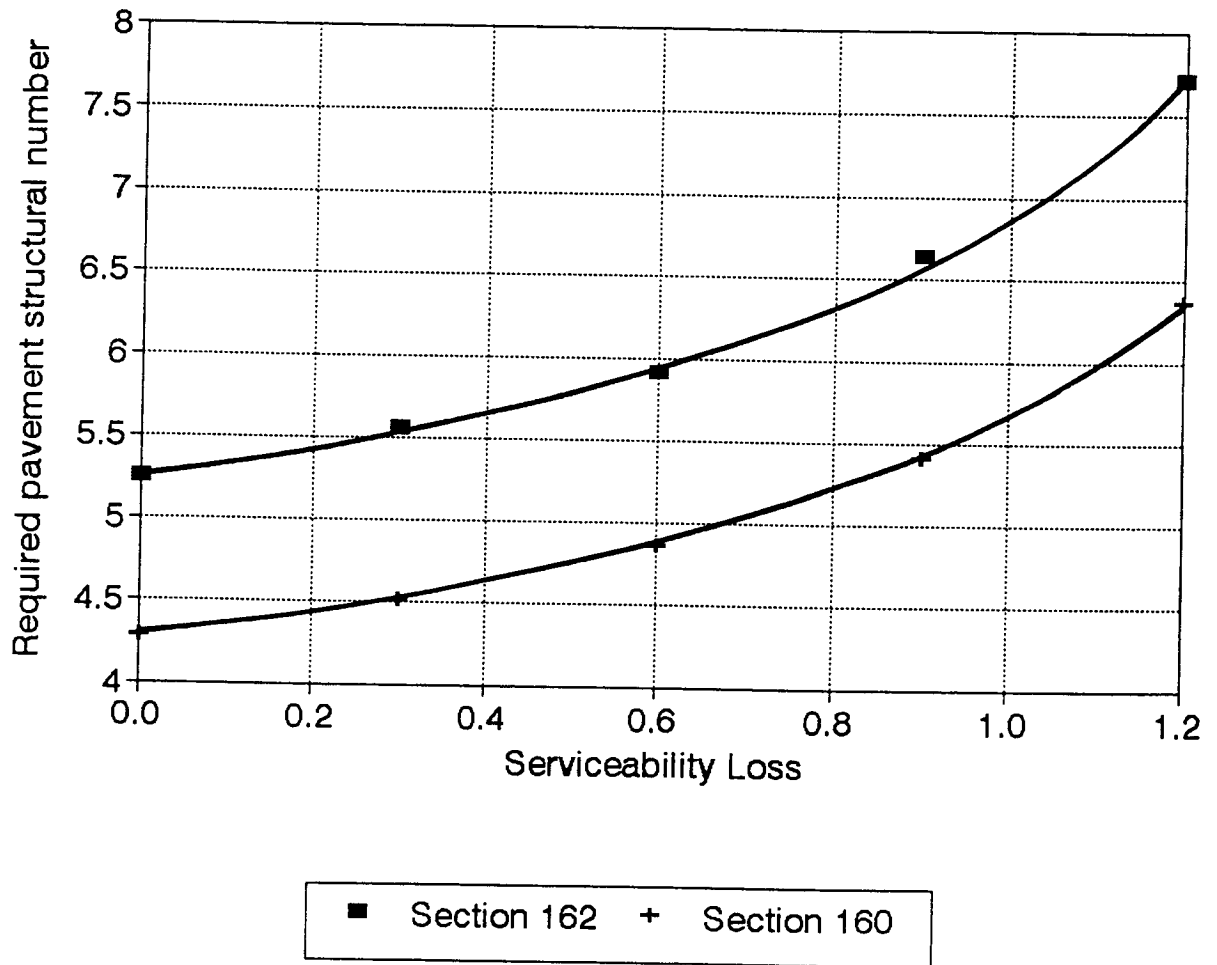


Figure 69. The required pavement structural number versus the serviceability loss due to environmental conditions.

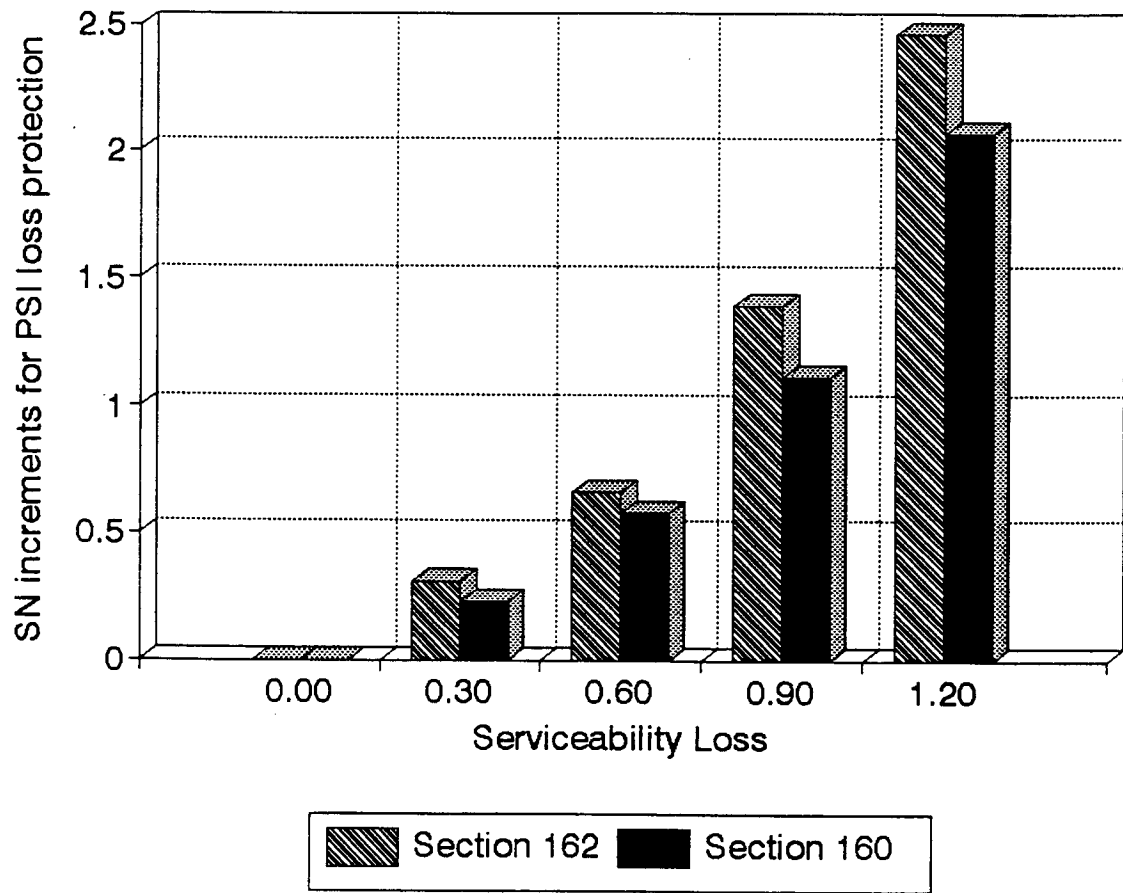


Figure 70. The incremental increase in the structural number versus the serviceability loss due to environmental conditions.

of the loss of serviceability due to traffic and the losses due to swelling and frost heave potentials. The concept (or the procedure in calculating the various losses) do not allow any interaction between the various losses. Consequently, the AASHTO concept seems to be incompatible with the outputs of the AASHTO design procedure.

The AASHTO concept of loss of serviceability due to environmental conditions was also evaluated in term of the effective resilient modulus of the roadbed soil. In this evaluation, the AASHTO design procedure was used to determine the value of the effective resilient modulus of the roadbed soil that will cause the same increase in the structural number as that due to environmental serviceability loss. Since the AASHTO design procedure is typically used to determine the required SN of the pavements for a given set of parameters, a trial and error procedure was used to determine the resilient modulus of the roadbed soil that will yield a given structural number. The results of the evaluation are listed in column 5 and 6 of table 16. Figure 71 displays the required value of the effective resilient modulus of the roadbed soil as a function of the serviceability loss. It can be seen that, higher environmental serviceability loss produces lower effective resilient modulus values. Increasing the environmental PSI loss from none to 1.2 will have the same effect on the required structural number of the pavement as that for decreasing the effective roadbed modulus from 10,000 to about 2,800 psi. Although, these findings tend to suggest that the AASHTO concept for environmental serviceability loss is reasonable, the findings cannot be supported by field data at this time.

One important point should be noted is that, regardless how reasonable the loss of serviceability concept is, the role of proper drainage design, good construction practices, and well thought standard specifications in extending the service life of pavements cannot be overemphasized.

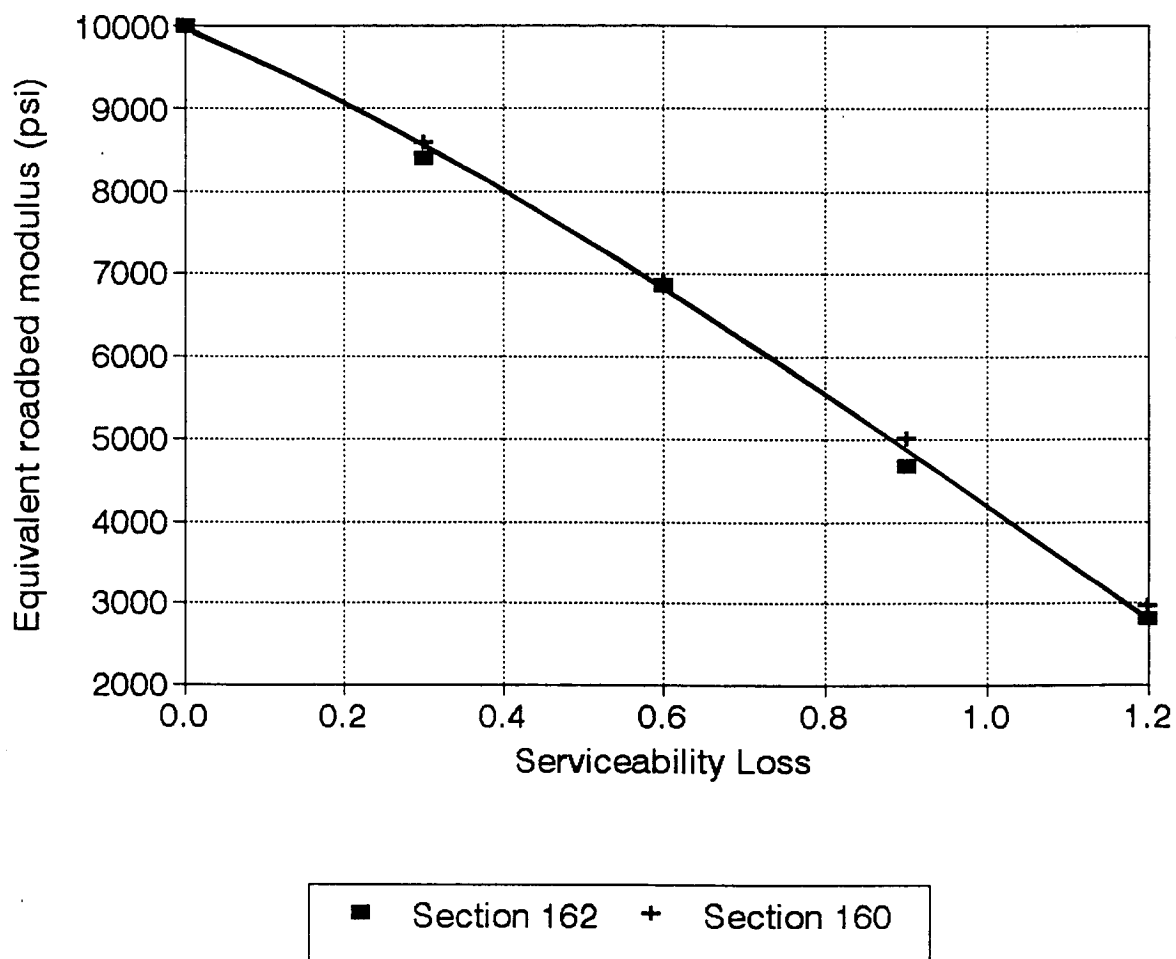


Figure 71. Equivalent roadbed resilient modulus that produces the same increases in the required pavement structural number as those required for environmental serviceability loss.

CHAPTER 6

MECHANISTIC ANALYSIS OF THE SHRP ASPHALT SURFACED PAVEMENT SECTIONS

6.1 GENERAL

This chapter presents the results of the mechanistic evaluation of the SHRP asphalt surfaced pavement sections. Due to the lack of appropriate material data in the National Pavement Performance Databank (NPPD), the values of the layer moduli backcalculated by using computer program MODULUS and the layer thicknesses found in the NPPD were used in the evaluation.

Because of various reasons including the calibration of the MODULUS program, the back-calculated layer moduli were made available to this project during the first month of 1993. Due to time constraint, the results of the mechanistic evaluation are reported herein with no substantive discussion. Although, several theoretical models concerning the cluster of variables were established for the purpose of developing mechanistic-based rut and fatigue cracking models, the data elements were not available on a timely fashion. Therefore, no mechanistic-based rut and/or fatigue models are reported.

During the course of this study, several important points were learned relative to the software (MODULUS program) and the backcalculated modulus values. These are presented in the next section.

6.2 IMPORTANT ISSUES RELATIVE TO THE MODULUS COMPUTER PROGRAM AND THE BACKCALCULATED LAYER MODULUS VALUES

The backcalculation of layer moduli of the various asphalt surfaced SHRP sections have been accomplished by the SHRP contractors of the four SHRP regions and by using the approved version of MODULUS software. Prior to the backcalculation, the MODULUS program was modified as to minimize the dependency of the outputs (the backcalculated layer moduli) on the user inputs of seed modulus. Several rules and tests were developed and approved by the SHRP office and they were implemented as parts of MODULUS program.

During this investigation, a new backcalculation computer program was under development as a part of a parallel project sponsored by the Michigan DOT and directed by the first author (Dr. Gilbert Baladi). The program was developed such that the final backcalculated layer moduli are independent of the user inputs of the values of the seed moduli. The new computer program "named MICHBACK" was written by using a new technique that was originally suggested by Dr. Robert Raab of the SHRP and later modified and implemented by the research team of MDOT project. Given the critical timing on such a program, the efforts scheduled for the MDOT contract were accelerated so that the new program could be used to randomly check the accuracy of the MODULUS backcalculated layer modulus values.

As a part of the MICHBACK development process and in order to test the accuracy of the MICHBACK calculated layer moduli, three different exercises were designed and they were undertaken by the authors. Two of the exercises concerned the backcalculation of layer moduli for several SHRP pavement sections listed in tables 18 and 19 and several MDOT pavement sections using measured deflection data. These two exercises do not have direct impacts on this study because they did not involve MODULUS program. The third exercise, however, has substantial impacts on the decisions regarding the SHRP LTPP program and its continuity by the Federal Highway Administration (FHWA). Therefore, it is included as a part of this report.

The third exercise was designed and conducted in cooperation with Rauhut Engineering Inc. (the contractor of the SHRP P-020A contract) to check the accuracy of the outputs of both MICHBACK and MODULUS programs. The exercise was accomplished in two steps as follows:

1. A deflection and layer thicknesses file concerning thirty pavement sections (10 artificial sections that were randomly mixed with 20 SHRP sections) was constructed by Peter Jordahl of Rauhut Engineering. For the twenty SHRP sections, the measured field deflection data and the layer thicknesses were included in the data file and were used for the backcalculation of the pavement layer moduli. The ten artificial sections were selected by Rauhut Engineering and the pavement deflections were mechanistically calculated (using the Waterways Experiment Station Layer Analysis Program, WESLAY) based on known sets of layer moduli, bedrock moduli, and various depths to bedrock. For all thirty sections, the modulus of, and depth to, bedrock were not included in the data file and therefore, were not known to the authors at the time of the exercise. Upon receiving the data file from Rauhut Engineering, the first author of this contract along with other members of the MDOT research team at Michigan State University (MSU) conducted backcalculation of layer moduli and depths to bedrock using the MICHBACK computer program. At the same time, the staff of Rauhut Engineering performed backcalculation of the layer moduli of all the thirty sections by using the modified and updated version of MODULUS program.
2. The results obtained from MICHBACK were further examined by the first author and other faculty at MSU, it was found that the version of the CHEVRON computer program used in MICHBACK was incorrect. A corrected version of the CHEVRON program was then obtained from Dr. Lynn Irwin at Cornell University. After replacing the incorrect version of the CHEVRON program by the corrected version, the ten analytical pavement sections were analyzed once again and the values of the backcalculated moduli were obtained. After the completion of this exercise and faxing the results to Rauhut Engineering Inc., the authors received a list of the true values of the layer moduli used by Rauhut Engineering to calculate the deflection basins. These values along with those backcalculated by Rauhut Engineering by using the MODULUS program are listed in table 20. The results are listed in the table in the following order:
 1. Column 1 provides a list of the section designation number (a number that was originally assigned by the staff of Rauhut Engineering).

Table 18. Pavement cross-sections (data supplied by the SHRP office).

Section ID	Layer Number	Material Type	Thickness (inch)
A	1	asphalt concrete surface	4.95
	2	crushed limestone base	13.40
	3	soil/aggregate (fine) subbase	12.00
	4	sand subgrade	
B	1	asphalt concrete surface	4.20
	2	gravel (uncrushed) base	5.00
	3	sand subgrade	
C	1	asphalt concrete surface	7.92
	2	soil cement base	8.36
	3	silty sand subgrade	
D	1	asphalt concrete surface	7.25
	2	cement aggregate mix base	5.50
	3	silty subgrade	
E	1	AC surface with overlay	7.45
	2	asphalt treated base	6.41
	3	crushed stone base	7.00
	4	silty clay/clayey silt subgrade	
F	1	AC surface with overlay	7.65
	2	crushed limestone base	14.47
	3	silty sand subgrade	49.88
	4	pieces of shale	
		grey at 6' below surface dark gray at 16.5' below surface	126.00
G	1	AC surface overlay	5.33
	2	jointed plain PCC base	9.60
	3	sand subbase	4.00
	4	silty sand subgrade	
H	1	AC surface overlay	2.54
	2	jointed plain PCC base	6.89
	3	sandy clay subgrade	

Table 19. The average deflection basins and loads (data supplied by the SHRP office).

Sec. ID	Load ID	Deflection in mils at a lateral distance in inch							
		Load (lbs)	0	8	12	16	24	36	60
A	1	7246	6.78	5.21	4.39	3.35	2.60	1.66	0.84
	2	10006	9.47	7.43	6.31	4.90	3.82	2.48	1.24
	3	12644	12.48	9.80	8.38	6.56	5.19	3.37	1.67
	4	17054	15.05	11.87	10.12	7.92	6.36	4.14	2.06
B	1	6460	8.50	6.63	5.34	3.94	2.93	1.78	0.99
	2	9596	12.21	9.43	7.65	5.72	4.32	2.62	1.36
	3	12700	15.16	11.83	9.66	7.31	5.55	3.40	1.79
	4	16362	18.87	14.69	12.06	9.21	7.04	4.34	2.33
C	1	6616	3.39	2.72	2.37	2.03	1.77	1.38	0.89
	2	9522	4.87	3.89	3.40	2.95	2.57	2.03	1.31
	3	12958	6.64	5.30	4.69	4.07	3.57	2.83	1.79
	4	16696	8.12	6.48	5.73	4.98	4.39	3.47	2.21
D	1	6264	3.30	3.17	2.98	2.70	2.45	2.04	1.38
	2	9474	5.67	5.27	4.97	4.50	4.10	3.42	2.38
	3	12914	7.97	7.48	7.06	6.51	5.96	5.01	3.48
	4	17474	10.41	9.68	9.17	8.47	7.78	6.58	4.62
E	1	7608	2.78	2.16	1.95	1.67	1.50	0.95	0.48
	2	9752	3.67	2.88	2.60	2.23	1.95	1.29	0.65
	3	12714	4.92	3.98	3.54	3.05	2.63	1.76	0.92
	4	17764	6.70	5.44	4.83	4.17	3.62	2.44	1.40
F	1	6534	3.28	2.69	2.33	1.88	1.56	1.09	0.68
	2	9512	5.07	4.32	3.67	2.99	2.40	1.69	1.01
	3	12662	7.28	5.97	5.17	4.26	3.49	2.37	1.33
	4	16812	9.71	8.17	7.11	5.88	4.81	3.29	1.83
G	1	6424	1.72	1.56	1.57	1.49	1.44	1.21	0.88
	2	9398	2.81	2.41	2.33	2.24	2.14	1.90	1.40
	3	12256	3.90	3.40	3.32	3.17	3.02	2.67	1.96
	4	16350	5.03	4.37	4.22	4.04	3.84	3.38	2.45
H	1	7734	4.55	3.74	3.60	3.26	2.88	2.16	1.15
	2	9704	5.77	4.79	4.66	4.26	3.75	2.80	1.49
	3	12504	7.99	6.72	6.53	5.92	5.27	4.03	2.17
	4	17706	10.90	9.25	8.99	8.27	7.34	5.63	3.10

** MICHBACK program did not converge for this deflection basin.

Table 20. Comparison of layer moduli of ten analytical pavement sections backcalculated by using MODULUS and MICHBACK computer programs (after correcting the CHEVRON program in MICHBACK).

SECTION	LAYER THICKNESSES (inch) AND MODULI (ksi)					ITEM	CUM. ABS. PERCENT ERROR	MOST ACCURATE PROGRAM
	AC	BASE	SUBBASE	ROADBED	BEDROCK			
4131	1.5	7.5	11.3	297.7	1000	Thickness		MICHBACK
	300	60	30	20	1000	T.M.*		
	207	62	30	20	1000	MODULUS	34	
	307.4	61.4	30.6	20.5	1000	MICHBACK	9	
1305	2.4	10.4	6	581.2	1000	Thickness		MICHBACK
	600	30	20	30	1000	T.M.*		
	516	32	27	18	1000	MODULUS	87	
	598	30.3	19.9	30.5	1000	MICHBACK	4	
1047	3	4.2	0	142.8	1000	Thickness		MICHBACK
	900	40	1	40	1000	T.M.*		
	621	79	1	31	1000	MODULUS	151	
	901.2	40	1	40	999	MICHBACK	0	
2109	3.7	12.1	0	584.2	1000	Thickness		MICHBACK
	600	60	1	30	1000	T.M.*		
	524	67	1	27	1000	MODULUS	34	
	602.4	59	1	29.2	998	MICHBACK	5	
4003	4.2	9.1	6	580.7	1000	Thickness		MICHBACK
	900	120	50	20	1000	T.M.*		
	866	107	134	13	1000	MODULUS	112	
	896.7	119.6	48.9	20	1000	MICHBACK	3	
3301	4.9	6.4	13.7	575	1000	Thickness		MICHBACK
	400	240	75	50	1000	T.M.*		
	627	199	22	23	1000	MODULUS	369	
	399.8	239.7	74	49	998	MICHBACK	4	
1099	5.7	8.9	36	249.4	1000	Thickness		MICHBACK
	900	1500	15	40	1000	T.M.*		
	886	1723	9.7	73	1000	MODULUS	154	
	910	1490	14.5	39.9	995	MICHBACK	5	
1111	6.6	4.2	14	275.2	1000	Thickness		MICHBACK
	600	75	25	35	1000	T.M.*		
	556	68	42	15	1000	MODULUS	114	
	600.6	75.3	24.6	34.8	1000	MICHBACK	3	
1035	8.3	14	0	577.7	1000	Thickness		MICHBACK
	300	600	1	25	1000	T.M.*		
	294	723	1	21	1000	MODULUS	39	
	300.6	599	1	25.3	1002	MICHBACK	2	
3801	10.3	6.6	12	121.1	1000	Thickness		MICHBACK
	600	150	50	30	1000	T.M.*		
	616	76	141	15	1000	MODULUS	167	
	601.5	148.6	49.8	29.4	1100	MICHBACK	4	

* = The true moduli (T.M.) of the pavement layers used in the forward calculations of the deflection basins.

1 = Indicates the absence of that layer.

2. For each designation number, columns 2 through 6 of table 19 provides the following data by row:
 - a) Row 1 - Layer thicknesses in inches.
 - b) Row 2 - The true values of the resilient modulus of each pavement layer, roadbed soil, and bedrock.
 - c) Row 3 - The values of the layer moduli backcalculated by the staff of Rauhut Engineering using the modified version of MODULUS program. Note that, bedrock modulus was not backcalculated by MODULUS program. The true value was used as input (fixed seed modulus).
 - d) Row 4 - The values of the layer moduli and the modulus of the bedrock backcalculated by the author using MICHBACK computer program.
3. Column 7 provides a title for each row of data.
4. Column 8 provides the values of the calculated cumulative absolute error between the backcalculated layer modulus values and the true values.
5. Column 9 provides a list of the most accurate program for the designated pavement section based on the value of the cumulative absolute error (the sum of the errors between the calculated and the measured deflections). Note that the term "tie" was used to indicates that both MICHBACK and MODULUS produced similar results. The results were considered the same when the difference between the cumulative absolute errors of both program is less than 20 percent.

It should be noted that the bedrock depths and moduli were not known to the author and hence, they were backcalculated using MICHBACK and that the bedrock moduli were known to the users of MODULUS program (they used them as inputs to MODULUS program in the form of fixed seed moduli). Therefore, one more unknown was calculated by the MICHBACK program. Nevertheless, examination of the results of the backcalculated layer moduli (for the ten analytical pavement sections) provided in table 20 indicates that:

1. For all pavement sections, the MICHBACK program produced more accurate results than those obtained from MODULUS program.
2. The maximum cumulative percent error obtained by MODULUS program is 369 percent (see pavement section 3301). This maximum is only 9 percent for the MICHBACK program (see section 3801). This maximum error for the MICHBACK program was found to be related to other issue as stated in the last paragraph of this section.

Figures 72 through 75 depict the absolute percent error in the backcalculated moduli (using the MODULUS program) for the AC, base, and subbase layers, and for the roadbed soil, respectively. Using the 20 percent error level in each material modulus as a criterion for accepting or rejecting the backcalculated values, it can be seen from the figures that:

1. For three of the ten analytical pavement sections, the error in the backcalculated AC moduli (see figure 72) is larger than 20 percent.
2. For two of the ten analytical pavement sections, the error in the backcalculated base

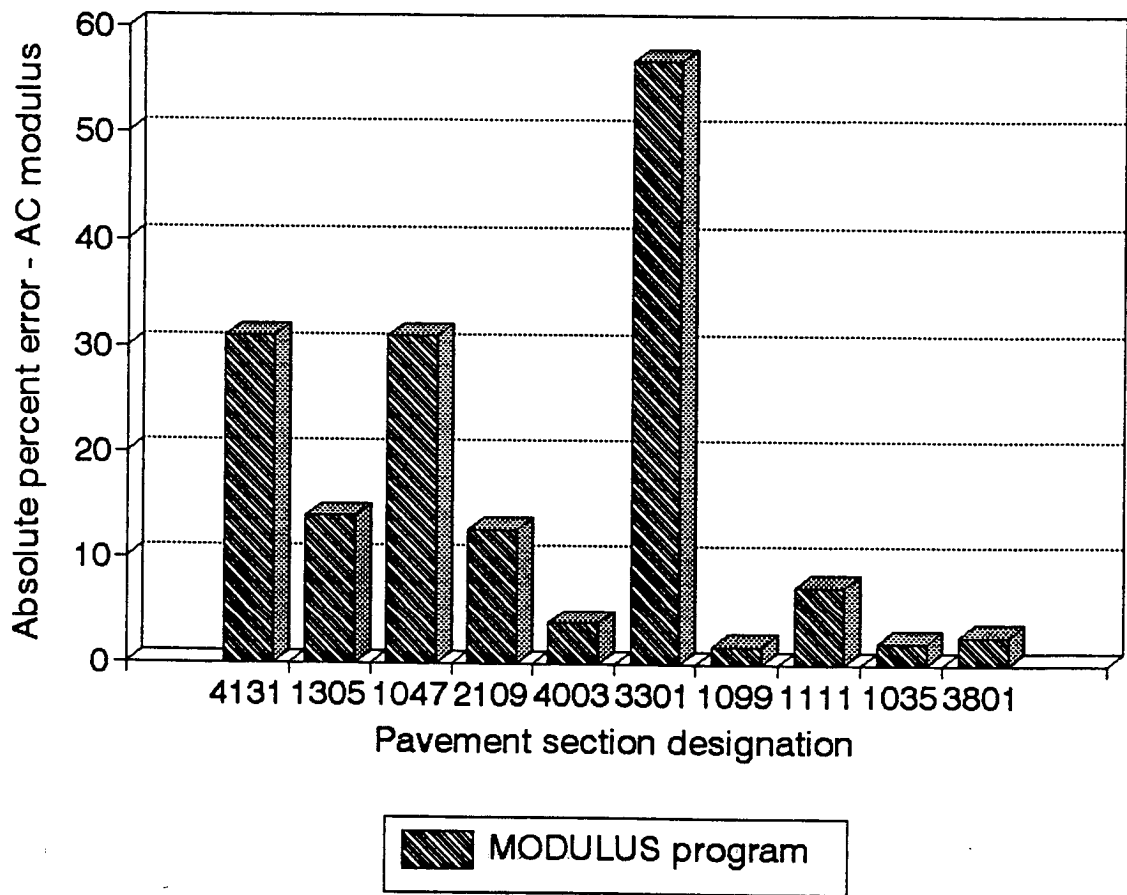


Figure 72. Absolute percent error in the AC modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.

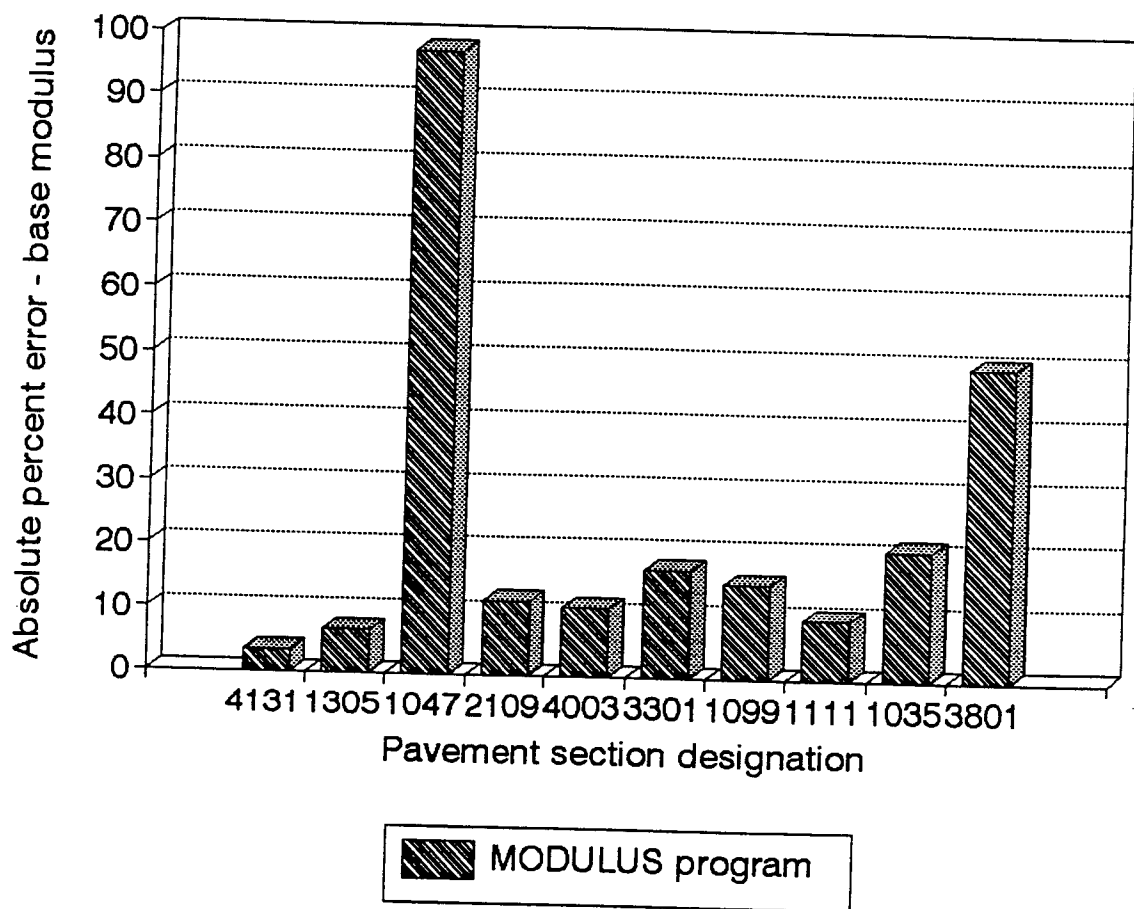


Figure 73. Absolute percent error in the base modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.

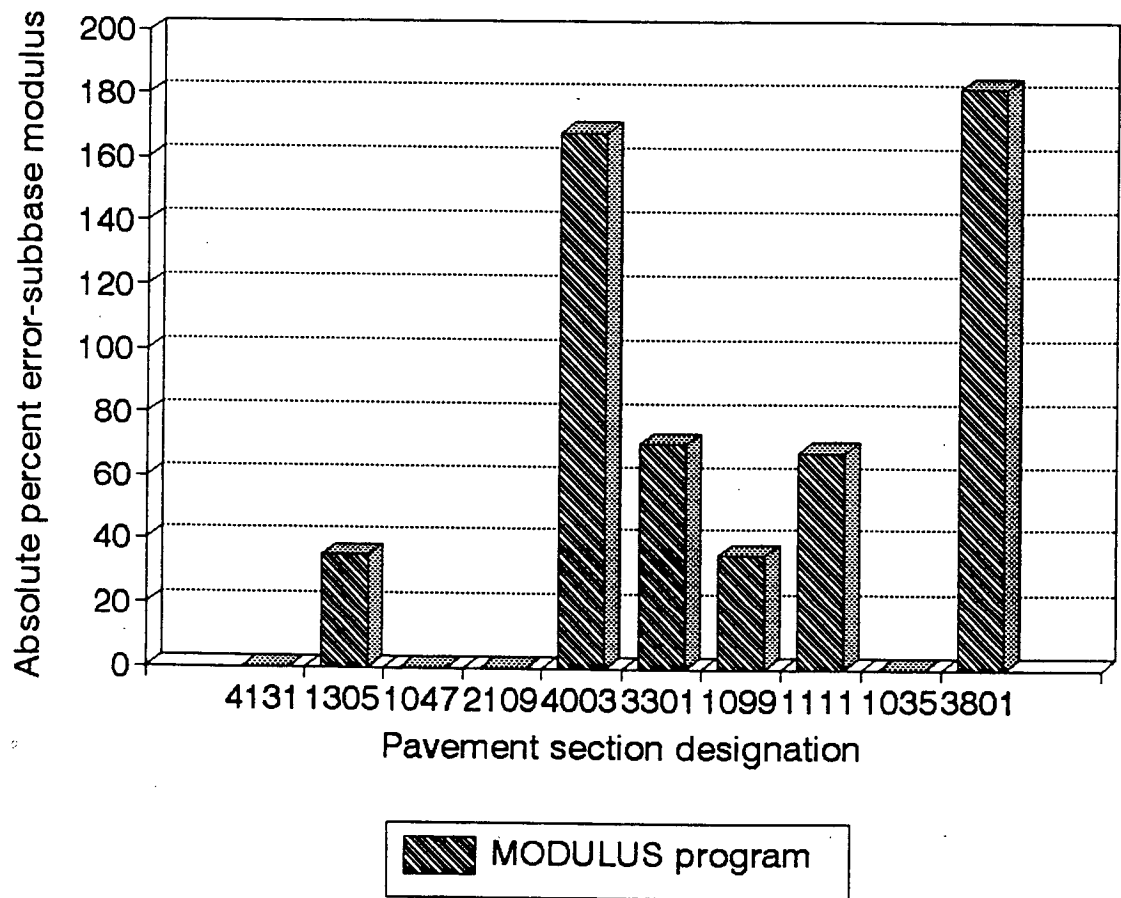


Figure 74. Absolute percent error in the subbase modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.

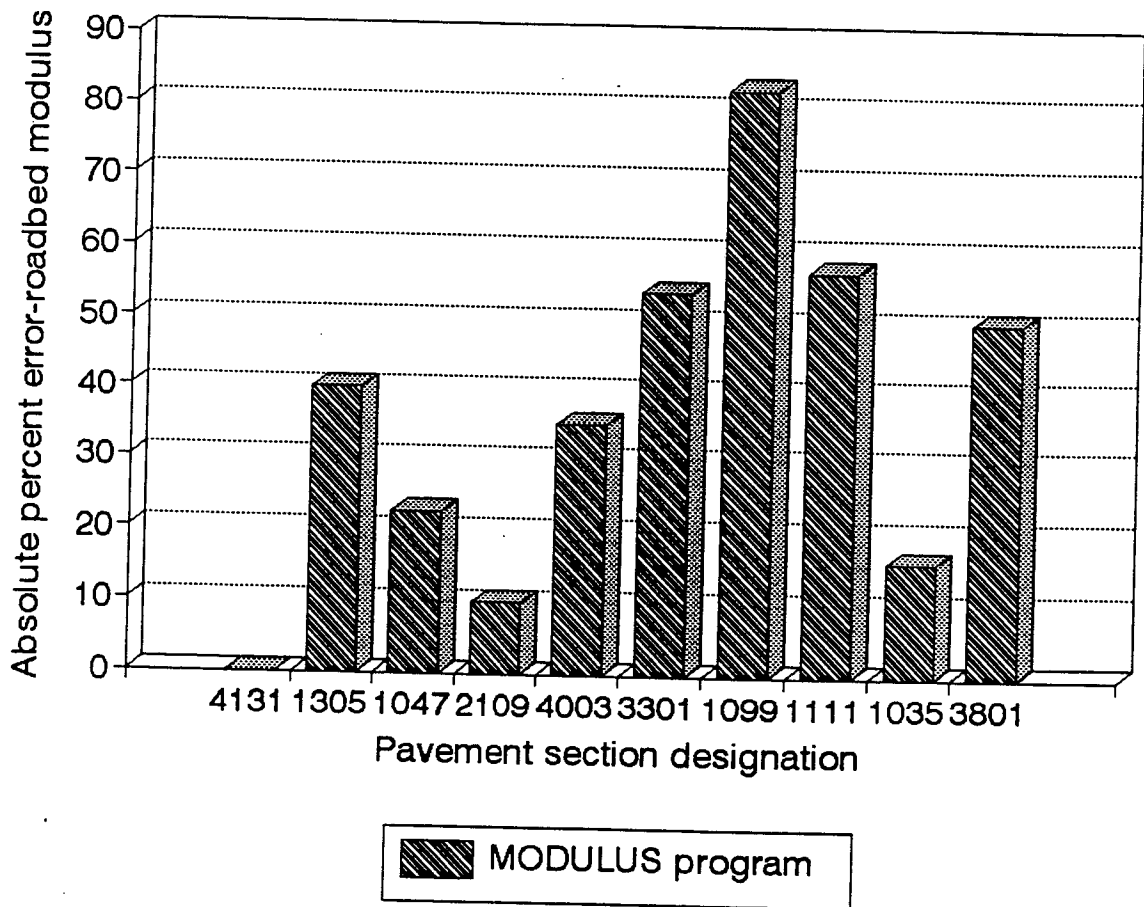


Figure 75. Absolute percent error in the roadbed modulus for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.

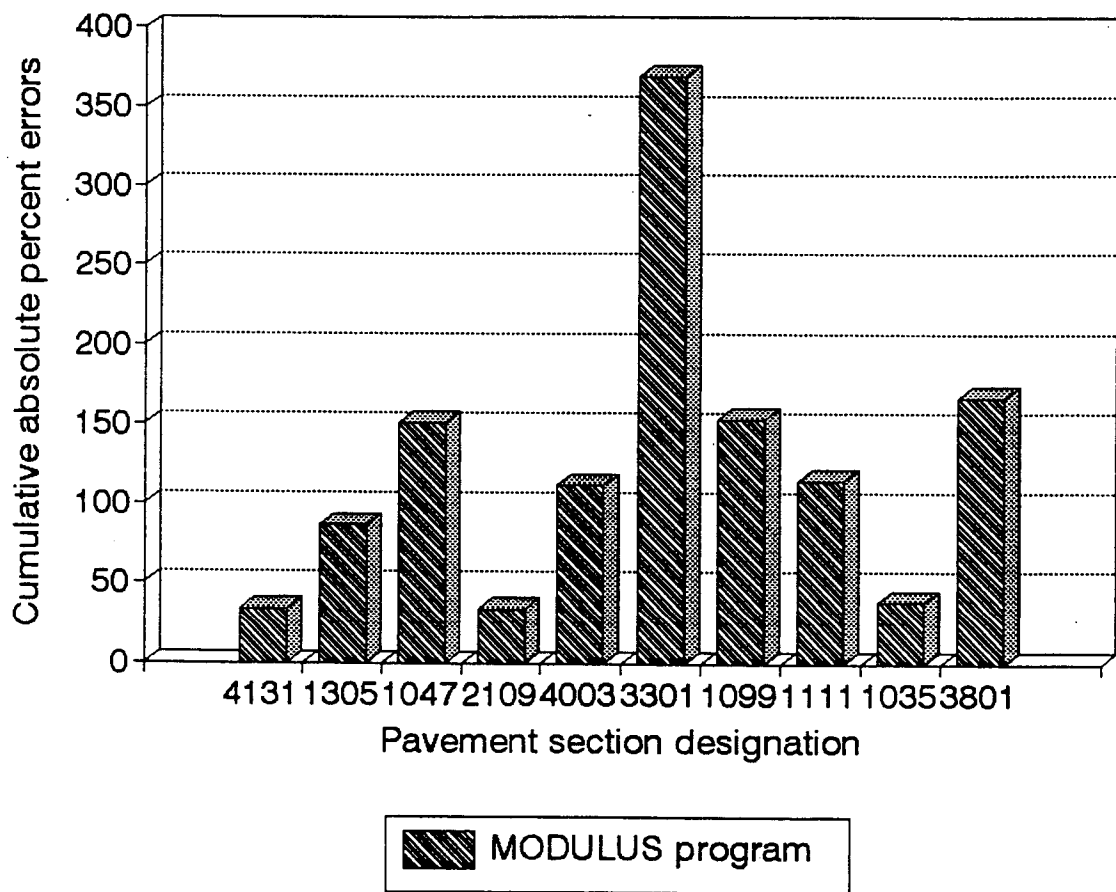


Figure 76. Cumulative absolute percent errors in all layer moduli for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program.

moduli (see figure 73) is larger than 20 percent.

3. For six of the ten analytical pavement sections, the error in the backcalculated subbase moduli (see figure 74) is larger than 20 percent.
4. For seven of the ten analytical pavement sections, the error in the backcalculated subbase moduli (see figure 75) is larger than 20 percent.

Finally, figure 76 shows the cumulative absolute percent errors in all backcalculated moduli produced by using the MODULUS program. It can be seen that the cumulative absolute percent errors for seven of the ten analytical sections is larger than 50 percent.

The analysis of the ten pavement sections presented above indicates that the results of the MODULUS program can be described as poor at best. Hence, extreme care should be taken when analyzing the backcalculated layer moduli of the SHRP pavement sections using measured deflection data. Stated differently, the MODULUS program must be substantially modified before the backcalculated modulus values can be accepted at face values.

6.3 MECHANISTIC ANALYSIS OF THE SHRP ASPHALT SURFACED PAVEMENT SECTIONS

As stated earlier, the MODULUS computer program was modified and several SHRP designed checks and tests and quality control statements were incorporated into the program. The modified program was then mailed to all SHRP regions to perform backcalculation on the SHRP asphalt surfaced pavement sections located in those regions. The backcalculated layer moduli along with the layer thicknesses were then tabulated in ASCII computer files and they were mailed to Michigan State University for mechanistic analysis of the pavement sections.

Upon receiving the backcalculated moduli data files from the various regions, each file was examined. For each pavement site and for each nondestructive deflection test location, the backcalculated layer moduli were not accepted for analytical analysis when the letter "N" was found in the quality control column of the file. The letter "N" indicated that the backcalculated layer moduli are not acceptable according to the SHRP acceptance criteria. On the other hand, all data entries with the letter "Y" in the quality control column indicates that the values of the backcalculated layer moduli have passed the SHRP quality control criteria. Nevertheless, about 40 percent of all tests have an "N" designate in the quality control column and hence, they were unacceptable. The data for all other deflection locations (with designate "Y" in the quality control column) were then accepted and they were transformed to other data files that are compatible with the MICHPAVE computer program (MICHPAVE is a linear and nonlinear finite element program that was developed at MSU).

It should be noted that the backcalculated layer moduli of numerous pavement sections can be considered unreasonable, although they have passed the SHRP quality check criteria (i.e., the letter "Y" is placed in the quality control column). For example, the value of the backcalculated asphalt modulus of the SHRP ID 893015 pavement section (see page A-3 of Appendix A) is 5,738,700 psi. This value is quite high and it can be considered unreasonable. Similarly, the backcalculated modulus value of the base layer of the SHRP ID 101450 (see page A-4 of Appendix A) can be considered unreasonable.

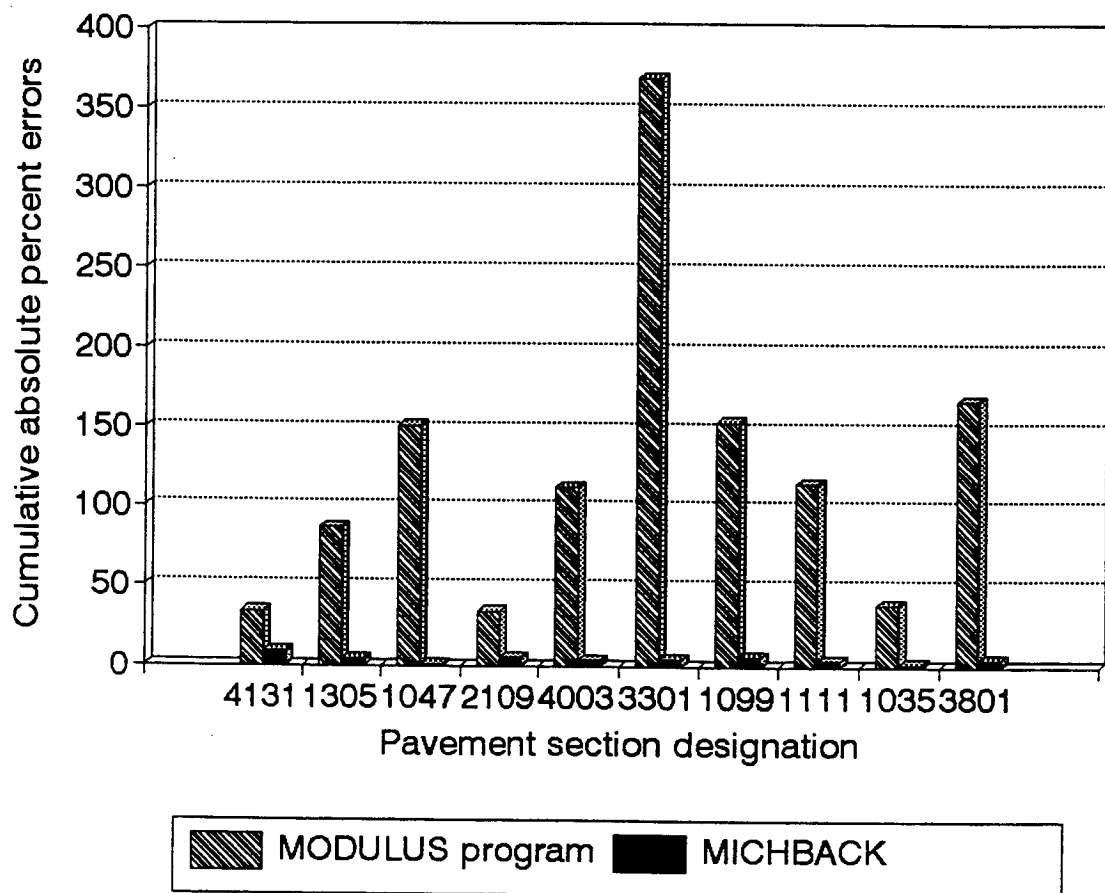


Figure 77. Cumulative absolute percent errors in all layer moduli for ten analytical pavement sections backcalculated by using the SHRP modified MODULUS program and the MICHBACK computer program.

For all of the SHRP asphalt surfaced pavement sections where the backcalculated layer moduli were accepted, the mechanistic responses (stresses, strains, and deflections) due to an 18-kip single axle load (one side of the axle or 9000 pounds was used in the analysis) were then calculated. The results are tabulated in Appendix A.

CHAPTER 7

SUMMARY AND CONCLUSIONS

7.1 SUMMARY

Mechanistic evaluations of the AASHTO design equations, the AASHTO concept of drainage coefficient, and the AASHTO concept relative to the loss of serviceability due to swelling and frost heave are presented and discussed. An artificial experiment design matrix consists of 243 pavement sections was designed. For each pavement section, a typical range of pavement material properties, traffic volume in term of 18-kip ESAL, and a typical range of roadbed soil were assigned. Each section was designed by using the 1986 AASHTO design procedure. The layer thicknesses obtained from the AASHTO design procedure and the material properties were then used and mechanistic analyses of all 243 pavement sections were conducted. Details of the research plan used for the evaluation of the AASHTO design procedure can be found in chapter 2 of this report.

From the 243 pavement sections, several sets of pavement sections (three pavement sections per set) that were designed by the AASHTO design procedure to have equal performance period, equal traffic, and equal level of protection were then chosen and their mechanistic responses (stresses, strains, and deflections) were compared. Based on this comparison, the 1986 AASHTO design procedure was evaluated. The results of the evaluation can be found in Chapter 3 of this report.

The AASHTO concept for drainage coefficient was evaluated by assigning five different values for the drainage coefficients of the base and subbase layers of a pavement section. For each value of the drainage coefficient, the pavement section was redesigned and the layer thicknesses were determined by using the 1986 AASHTO design procedure. These thicknesses along with the appropriate material properties were then used to calculate the mechanistic responses of the pavement due to a 9000 pound load. The evaluation of the AASHTO concept for drainage coefficient was evaluated by comparing the mechanistic responses. The results of the evaluation are presented in chapter 4 of this report.

Similarly, the AASHTO concept for loss of serviceability due to environmental factor was evaluated by using five values of the loss of serviceability due to soil swelling and frost heave. Chapter 5 of this report presents the results and discussion of this evaluation.

Finally, all of the SHRP asphalt surfaced pavement sections where the backcalculated layer moduli were accepted by the SHRP established quality control criteria were evaluated using MICHPAVE computer program. The mechanistic responses can be found in Appendix A.

During the course of the investigation, the backcalculation computer program MODULUS (which was accepted by the SHRP) was also evaluated. Ten forward calculated deflection basins were used in this evaluation. The results are presented in Chapter 6.

7.2 CONCLUSIONS

Based on the research plan, the mechanistic evaluation of the 1986 AASHTO design procedure which includes the concepts of drainage coefficients and loss of serviceability due to environmental conditions, and on the basis of the range of variables used in this study, several conclusions are drawn. These conclusions are divided into several categories that are relevant to the topic and are summarized below.

7.2.1 The AASHTO Design Procedure

7.2.1.1 Observations

For a given value of the resilient modulus of the roadbed soil, a constant traffic volume, a constant design reliability level, and a constant overall standard deviation, the AASHTO design procedure produces:

1. Pavement sections with a constant SN which presumably provides an equal level of protection against traffic loading to all pavement layers regardless of the type and quality of the AC, base, and subbase layers.
2. An AC layer thickness that is independent of the properties (modulus or layer coefficient) of the subbase material and roadbed soil. It depends on the layer coefficients of the AC and base materials.
3. A base layer thickness that is independent of the resilient moduli of the AC layer and roadbed soil. It depends on the layer coefficient of the base and subbase materials.
4. A subbase thickness that is independent of the resilient moduli of the AC and base layers. It depends on the layer coefficient of the subbase material and on the modulus of the roadbed soil.

7.2.1.2 Conclusions

Relative to the AASHTO design procedure and the above general observations, and based on the results of the mechanistic evaluation of the AASHTO design procedure and the range of material properties used in this study, the following conclusions are drawn:

1. **Results of the mechanistic evaluation support observation "1" of the AASHTO design procedure.** The reason is that, for a constant traffic level and one type of roadbed soil, and for the range of the AC, base, and subbase properties used in this study, the AASHTO design procedure produces pavement sections (layer thicknesses) such that the peak surface deflection is constant.

Hence, the amount of the overall damage delivered to the pavement section (or the overall protection level) is constant and independent of the material properties.

2. **Results of the mechanistic evaluation do not support observations "2, 3, and 4" of the AASHTO design procedure.** The reasons are that for a constant traffic level and one type of roadbed soil, the AASHTO design procedure produces:
 - a) pavement sections (layer thicknesses) such that the amount of compression and the resulting tensile strain experienced by any one layer vary from section to section. Hence, the amount of damage delivered to each layer of the pavement sections (or the level of protection) varies. This implies that while the AASHTO design procedure insures that the overall damage of the pavement sections is the same, the relative damage delivered to each layer is not.
 - b) pavement sections (layer thicknesses) such that the tensile stress and the ratio of the tensile stress to the AC modulus induced at the bottom of the AC layer vary from section to section. Hence, the amount of damage delivered to each layer of the pavement sections (or the level of protection) varies.

Based on the mechanistic evaluation of the AASHTO design equations (the structural number equation, the layer coefficient equations or nomographs, and the AASHTO main design or performance equation), the following conclusions are drawn:

1. **Results of the mechanistic evaluation support the AASHTO structural number equation** (the structural number of any flexible pavement section is the sum of the structural numbers of its layers).
2. **Results of the mechanistic evaluation do not support the AASHTO structural number concept of any one flexible pavement layer** (the structural number of any flexible pavement layer is the product of its thickness and its layer coefficient, and the layer coefficient of any pavement layer can be obtained from the appropriate equation or nomograph based on the modulus value of that layer).
3. **Results of the mechanistic evaluation do not support the role of the roadbed soil resilient modulus in the AASHTO main design/performance equation** (the equation does not properly account for the effects of the resilient modulus of the roadbed soil on the structural capacity of the pavement).

7.2.2 The AASHTO Drainage Coefficient Concept

7.2.2.1 Observations

The AASHTO concept relative to drainage coefficient allows the user to either modify the thicknesses of each layer (Higher layer thicknesses for lower values of the drainage coefficients).

7.2.2.2 Conclusions

Based on the results of the mechanistic evaluation of the AASHTO drainage concept, the following conclusions are drawn:

1. The layer thicknesses modification option produces pavement sections with variable mechanistic responses.
2. The layer coefficient modification option tends to produce better pavement cross-section than the thickness modification option.
3. The DNPS86 and Darwin programs are both based on the thickness modification option.
4. The mechanistic-based modification of the effects of the AASHTO drainage coefficients on the pavement design produces better pavement cross-sections than either the thickness or the layer coefficient modification options.
5. Accounting for the quality of drainage in terms of percent gain or loss in the pavement service life is a viable option.

7.2.3 Loss of Serviceability Due to Environmental Factors

7.2.3.1 Observations

The AASHTO loss of serviceability concept is a linear concept, the total loss of pavement serviceability is the sum of the loss of serviceability due to traffic and the losses due to swelling and frost heave potentials. The concept (or the procedure in calculating the various losses) do not allow any interaction between the various serviceability losses.

7.2.3.2 Conclusions

Based on the results of the evaluation of the AASHTO concept of loss of serviceability due to environmental factors, the following conclusions are drawn:

1. The AASHTO concept of loss of serviceability (a linear concept) seems to be incompatible with the outputs of the AASHTO design procedure (the outputs, the layer thicknesses, are based on the interaction between the damages contributed by traffic and those by swelling and frost heave).
2. The loss of serviceability due to environmental conditions can also be expressed in terms of the effective roadbed resilient modulus.
3. The AASHTO concept for loss of serviceability due to environmental factors seems to be reasonable.

7.2.4 Backcalculation of Layer Moduli

7.2.4.1 Observations

MODULUS computer program for the backcalculation of layer moduli using nondestructive deflection test data was modified according to several SHRP specifications and rules. The accuracy of the backcalculated moduli values using the modified version of MODULUS program was evaluated by using ten analytical pavement sections (ten analytical deflection basins where the exact values of the layer moduli are known).

7.2.4.2 Conclusions

Based on the results of the evaluation of the modified version of MODULUS computer program, the following conclusions are drawn:

1. The modified version of MODULUS program produces inaccurate backcalculated layer moduli values.
2. The degree of confidence in the backcalculated layer modulus values is poor at best.

7.2.5 Mechanistic Evaluation of the Asphalt Surface Pavement Sections

7.2.5.1 Observations

The mechanistic evaluation of the asphalt surfaced pavement sections was conducted on the basis of the values of the layer moduli backcalculated by using the MODULUS program and the layer thicknesses found in the NPPD. The evaluation was limited to those pavement sections and deflection test locations where the backcalculated layer modulus values have passed the SHRP quality control check.

7.2.5.2 Conclusions

Based on the examination of the backcalculated layer modulus values that have passed the SHRP quality control checks and were reported by the various SHRP regions, the following conclusions were drawn:

1. The values of the backcalculated layer moduli for some pavement sections at some test locations are not reasonable.
2. The MODULUS program needs to be evaluated once again prior to any further backcalculation of layer moduli.

CHAPTER 8

RECOMMENDATIONS

8.1 RECOMMENDATIONS

Based on the analyses and evaluations presented in chapter 1 through 6 and on the conclusions presented in chapter 7, several recommendations are made. These recommendations are divided into several topics and presented below.

8.1.1 The AASHTO Design Equations

Relative to the AASHTO design equations and the AASHTO design procedure, the following recommendations are made:

1. It is highly recommended that the layer coefficients nomographs and equations be calibrated on the basis of mechanistic analyses. The calibration should address two important issues:
 - a) The layer coefficient of any one pavement layer material is a function of all other layer coefficients, hence, the calibration process should address this relationship.
 - b) The layer coefficients should lead to pavement cross-sections whereby the damage delivered to the pavement structure and to each layer is constant for the same design parameters (traffic, serviceability loss, design reliability, and the over all standard deviation).
2. It is recommended that the effects of the resilient modulus of the roadbed soil in the AASHTO main design/performance equation be calibrated on the basis of the mechanistic outputs and the damage delivered to the pavement section.

8.1.2 The AASHTO Concept for Drainage Coefficient

Relative to the AASHTO drainage coefficient concept, the following recommendations are made:

1. It is highly recommended that the existing option to modify the layer thicknesses to account for the effects of drainage coefficients be eliminated from the 1986 AASHTO Design Guide.
2. It is highly recommended that the AASHTO procedure to account for the effects of layer coefficients be modified. Two alternatives are recommended and are listed below in their order of accuracy.

- a) **Alternative 1 - Mechanistic-Based Modification Method.** It is highly recommended that the 1986 AASHTO Design Guide be modified and a mechanistic-based method to account for the effects of drainage coefficients on the pavement design process be included as a substitute to the existing procedure. The new method should be based on the results of the mechanistic evaluation of various pavement sections having several values of drainage coefficients.
 - b) **Alternative 2 - Layer Coefficient Modification Method.** It is recommended that the 1986 AASHTO Design Guide be modified as to clarify the procedure that accounts for the effects of drainage quality on the pavement design process and to restrict the process to one option (the layer coefficient modification option). Examples should be included.
3. It is recommended that the AASHTO design computer programs be modified according to the above recommendations.

8.1.3 AASHTO Concept for Loss of Serviceability Due to Environmental Factors

Based on the analysis of the AASHTO concept for loss of serviceability due to swelling and frost heave, the following recommendation is made:

1. It is recommended that an explanation of the interaction and nonlinearity of the AASHTO concept be included in any future modification of the AASHTO Design Guide.

8.1.4 Backcalculation of Layer Moduli

Based on the evaluation of the SHRP adopted and then modified MODULUS computer program for the backcalculation of layer moduli, the following recommendations are made:

1. It is recommended that MODULUS program be further modified and retested for the accuracy of the backcalculated layer moduli.
2. It is highly recommended that for future LTPP data analysis, another backcalculation computer program be adopted and that the new program should be capable of:
 - a) Calculating to within a reasonable accuracy the depth to a stiff layer.
 - b) Calculating to within a reasonable accuracy the modulus values of all pavement layers.
 - c) Producing backcalculated layer modulus values that are independent of the user

inputs of the seed moduli, the user designation of the material type, and the user input of the depth to stiff layer.

8.1.5 Future LTPP Data Analysis

Based on the availability and evaluation of the data elements in the NPPD and on the mechanistic evaluation of the asphalt surfaced pavement sections, the following recommendations are made:

1. It is recommended that monitoring of all GPS sections to continue and that distress data (such as fatigue cracking, rut, roughness, and temperature cracking) be collected separately. This should allow the development of mechanistic based performance models.
2. It is recommended that nondestructive testing data be collected at a regular interval (such as every other year) so that the effects of time and traffic volume on the structural capacity of the pavements can be assessed.
3. It is recommended that traffic data be collected in terms of volume and weight (e.g., weigh in motion).
4. It is recommended that additional asphalt surfaced pavement sections be added to the existing GPS pool. The new sections could be selected on the basis of the lack of pavement sections with certain distress characteristics (e.g., fatigue cracking) in the existing GPS pool and on data availability in the State Highway Agency.
5. It is recommended that the SPS experiment be extended to include pavement sections constructed with polymer modified asphalts, stone mastic asphalt, and rubber additives.

REFERENCES

1. Baladi, G.Y., and Snyder, M.B. "Highway Pavements." Vol. I, and II. National Highway Institute, Washington, D.C., 1990.
2. Oglesby C.H., and G.R. Hicks. Highway Engineering. 4th. edition. New York, John Wiley and Sons, 1982.
3. Wright P.H., and R.J. Paquette. Highway Engineering. 5th. edition. New York: John Wiley and Sons, 1987.
4. Yoder E.J., and M.W. Witczak. Principles of Pavement Design. 2nd. edition. New York: John Wiley and Sons, 1987.
5. ERES Consultants, Inc. Pavement Design Principles and Practices. Champaign, Illinois, National Highway Institute, Washington, D.C., 1987.
6. Portland Cement Association. Thickness Design for Concrete Pavements. PCA 1966.
7. Highway Research Board. The AASHTO Road Test--Report 5, Pavement Research. HRB Special Report 61E. 1962.
8. American Association of State, Highway, and Transportation Officials. AASHTO Guide for Design of Pavement Structures. Washington, D.C., 1986.
9. The Asphalt Institute. Thickness Design - Asphalt Pavements for Highways and Streets. Manual series No. 1 (MS-1). September, 1981.
10. Kenis, W.J. Predictive Design Procedures. VESYS Users Manual. Final Report, FHWA-RD-77-154. January, 1978.
11. Majidzadeh, U., and G. Ilves. Flexible Pavement Overlay Design Procedures, Volume I, Evaluation and Modification of the Design Methods. Final Report FHWA-RD-82a32. 1981.
12. FHWA. ELSYM5 Interactive Microcomputer Version, User's Manual, IBM-PC and Compatible Version. Final Report, Contract No. DTFH61-85-C-00051. September, 1985.
13. National Stone Association. Flexible Pavement Design Guide for Roads and Streets. January, 1985.
14. Southgate, H.F., R.C. Deen, and J.H. Havens. Development of a Thickness Design System for Bituminous Concrete Pavements. Research Report UKTRP- 81-20. Kentucky Transportation Research Program, University of Kentucky, November, 1981.

15. Baladi, G.Y., Lyles, R.W., and Harichandran, R. S. Asphalt Mix Design: an Innovative Approach. Presented at, and accepted for publication by, the Transportation Research Board. Washington, D.C., January, 1988.
16. Baladi, G.Y., and J.H. De Foe. The Indirect Tensile Test: A New Horizon. An interim report submitted to the FHWA. March, 1987.
17. Baladi, G.Y. Integrated Material and Structural Design Method For Flexible Pavements. Final report no. FHWA/RD-88/109, 110 and 118. September, 1987.
18. Baladi, G.Y. Linear Viscosity. U.S. Army Engineers Waterways Experiment Station, October 1985, pp. 1-6.
19. Baladi, G.Y. Numerical Implementation of a Transverse-Isotropic, Inelastic, Work-Hardening Constitutive Model. Soil Dynamics Division, Soils and Pavement Laboratory, U.S. Army Engineer Waterways Experiment Station, Vicksburg, Mississippi.
20. Hutchinson, B.G., and R.C.G., Haas. A Systems Analysis of the Highway Pavement Design Process. Highway Research Record No. 239. Highway Research Board, Washington, D.C., 1969.
21. George, K.P., A.S., Rajagopal, AND I.K. Lim, "Models for Predicting Pavement Deterioration." Accepted for publication by the Transportation Research Board, 1990.
22. George, K.P., "Pavement Management Information Systems." Final report to Mississippi State Highway Department, The University of Mississippi, MS-1990.
23. Grambling, W.L., and T.D. Larson, "The Development and Implementation of Pennsylvania Roadway management Systems - STAMPP." Proceedings, 1st North American Pavement Management Conference, Toronto, Canada, 1985.
24. Bartel, C., and K. Kampe, "Development of the California Pavement Management Systems." California Department of Transportation, Sacramento, California, 1978.
25. ERES Consultants, Inc. Techniques for Pavement Rehabilitation. Champaign, Illinois, National Highway Institute, Washington, D.C., 1987.
26. Carey, W.N., and P.E., Irick. The Pavement Serviceability-Performance Concept. Bulletin 250. Highway Research Board, Washington, D.C., 1960.
27. Haas R., and R.W. Hudson. Pavement Management Systems. Malabar, Florida. Robert E. Krieger Publishing Company, 1982.

28. Proceedings. Vol. I, II, and III. North American Pavement Management Conference, Toronto, Ontario, Canada, 1985.
29. Proceedings. Vol. I, II, and III. Second North American Pavement Management Conference, Toronto, Ontario, Canada, 1987.
30. FHWA Pavement Management Workshop. Final Report No. FHWA-TS-79-206. Tumwater, Washington, D.C., 1978.
31. Roads and Transportation Association of Canada. Pavement Management Guide. Ottawa, Canada, 1977.
32. Baladi, G.Y., R.S. Harichandran, and R.W. Lyles. New Relationships Between Structural Properties and Asphalt Mix Parameters. Presented at, and accepted for publication by, the Transportation Research Board. Washington, D.C., January, 1988.
33. American Society for Testing and Materials. Annual Book of ASTM Standards. Road and Paving Materials, Traveled Surface Characteristics. Volume 04.03, May, 1986.
34. Harichandran, R.S., and M.S. Yeh. Flexible Boundary in Finite Element Analysis of Pavements. Presented at, and accepted for publication by, the TRB. January, 1988.
35. Kenis, W.J., J.A. Sherwood, and T.F. McMahon. "Verification and Application of the VESYS Structural Subsystem." Proceedings, the 5th International Conference on the Structural Design of Asphalt Pavements. The University of Michigan and the Delft University of Technology. The Delft University of Technology, the Netherlands. Volume I. August, 1982.
36. Baladi, G.Y. The Resilient and Plastic Characteristics of Michigan Subgrade Soils and their Soil Support Values. Final report No. FHWA-MI- RD-81-02. Michigan Department of Transportation, Lansing, Michigan, August, 1981.
37. Thompson, M.R., et. al. Subgrade Stability. Final report number FHWA-IL- UI-169. Illinois Department of Transportation, 1985.
38. Robnett, Q.L., and M.R. Thompson. Resilient Properties of Subgrade Soils - Phase I - Development of Testing Procedure. An interim Report, Civil Engineering Studies Transportation Engineering Series No. 5. Illinois Cooperative Highway Research Program, Series No. 139. University of Illinois at Urbana-Champaign, May, 1973.
39. Pell, P.S., "Keynote Lecture - Pavement Materials." Sixth International Conference, Structural Design of Asphalt Pavements, Ann Arbor, Michigan, 1987.
40. Majidzadeh, K., K.S., Khedr, and H. Gnirgnis, "Laboratory Verification of a Mechanistic Subgrade Rutting Model." Transportation Research Record No. 616, 1976.

41. Rajagopal, A.S., and K.P. George, "Effect of Environment on Durability of Pavement Materials: An Overview." Proceedings, Material Engineering Congress, ASCE, Denver, Colorado, 1990.
42. Flanagan, P.R., and D.S. Halbad, "Expert Systems as a Part of Pavement Management." Transportation Research Record No. 1123, 1987.
43. Yandell, W.O. and I.K. Lee, "Application of Mechano-Lattice Analysis in Material Engineering." Proceedings, 2nd Australian Conference on Engineering Materials, July 1981, Sydney.
44. Yandell, W.O., "Residual Stresses and Strains and Fatigue Cracking." Transportation Journal, American Society of Civil Engineers, Vol. 108, No. TEI, January 1982.
45. "Improving Pavement Deterioration Models for Cost Allocation Purposes" Final Report by Globe Trotter Eng. Corp., Chicago under contract DTFH61- 86-C00029, July 30, 1988.
46. Saxena, S.K. and Dounios G.T., (1986), "Mechanical and Environmental Stresses in CRC Pavements," The Transportation Research Record No. 1099, pp. 12-22.
47. Baladi, G.Y. In-Service Performance of Flexible Pavements. Vol. II. Proceedings, International Air Transportation Conference, American Society for Civil Engineering, New Orleans, 1979.
48. Baladi, G.Y. Nondestructive Pavement Evaluation: the Deflection Beam. No. 666. Transportation Research Record, National Academy of Sciences, Washington, D.C., 1980.
49. Treybig, H.J., B.F. McCullough, P. Smith, and H. VonQuintus. Overlay Design and Reflection Cracking Analysis for Rigid Pavements, Volume I- Development of New Design Criteria. FHWA Report FHWA-RD-77-76. 1977.
50. Vesic, A.S., and S.K. Saxena. Analysis of Structural Behavior of Road Test Rigid Pavements. Highway Research Record No. 291. 1969.
51. Baladi, G.Y. Fatigue Life and Permanent Deformation Characteristics of Asphalt Concrete Mixes. Presented at the TRB meetings, January 1989. Submitted for publication by the TRB, August, 1988
52. Maupin, G.W. Simple Procedure for Fatigue Characterization of Bituminous Concrete. Transportation Research Board, FHWA Report No. FHWA-RD-76-102. June, 1976.

53. Majidzadeh, X. et al. A Study for Laboratory Implementation of Fatigue Mix Design Procedures. Final Report EES 483. Ohio State University Engineering Experiment Station, 1976.
54. Shahin, M.Y, and B.F. McCullough. Predictions of Low-Temperature and Thermal-Fatigue Cracking in Flexible Pavements. Report No. 123-14. CF13R. University of Texas, August, 1972.
55. Carpenter, S.H. Thermal Cracking in Asphalt Pavements: An Examination of Models and Input Parameters. Agency Report to CRREL. Hanover, New Hampshire, April, 1983.
56. Ruth, B.E., A.K. Bloy, and A. A. Avital. "Prediction of Pavement Cracking at Low Temperatures." Proceedings AAPT, Vol. 51, 1982.
57. Fromm, H.J., and W.A. Phang. "A Study of Transverse Cracking of Bituminous Pavements." Proceedings AAPT, Vol. 41, 1972,.
58. Kennedy, T.W., et al. Texas Freeze-Thaw Pedestal Test for Evaluating Moisture Susceptibility for Asphalt Mixtures. Research Report 253-3. CFTHR. University of Texas, August, 1981.
59. Chan, Y.T. Analysis of Subgrade Rutting in Flexible Airfield Pavements. Research Record No. 616. Transportation Research Board, 1976.

APPENDIX A

RESULTS OF THE MECHANISTIC ANALYSIS OF THE ASPHALT SURFACED PAVEMENT SECTIONS

APPENDIX A

RESULTS OF THE MECHANISTIC ANALYSIS OF THE ASPHALT SURFACED PAVEMENT SECTIONS

The results (mechanistic responses) in terms of stresses, strains, and deflections of the SHRP asphalt surfaced pavement sections located in the four regions (North Atlantic, Western, South West, and North Central) are tabulated in this appendix.

In reference to page A-3, for each SHRP section and deflection test location, the data elements in the table are listed in order in 19 columns (column 1 is the left-hand side column) and 7 rows. The tables should be used as follows:

1. Column 1 - Provides the SHRP Identification (ID) number.
2. Column 2 - Provides the total number of layers in that pavement section.
3. Columns 3 through 7 - Provides, respectively, the layer number in question (1 = AC, 2 = base, 3 = subbase, and 4 = roadbed soil); layer type; layer thicknesses; the backcalculated layer moduli; and the layer Poisson's ratio used in the analysis.
4. Column 8 - Provides the depth information (at the surface and at the interfaces between layers) at which the stresses, strains and deflections are calculated under the center of the loaded area. Hence the depth information should be used along with the mechanistic responses listed in columns 9 through 14 only.
5. Column 9 through 14 - Provides, respectively, the following information:
 - Column 9 - deflection (mills).
 - Column 10 - Radial stresses (psi).
 - Column 11 - Vertical stresses (psi).
 - Column 12 - Shear stresses (psi).
 - Column 13 - Radial strain (inch/inch).
 - Column 14 - Vertical strain (inch/inch).
6. Column 15 - Provides a list of the radial distances at which the mechanistic responses at the pavement surface are calculated. Hence, the information in this column should be used along with the information in columns 16 through 19 as follows:
 - Column 16 - Radial displacement (mills).
 - Column 17 - Vertical deflection (mills).
 - Column 18 - Radial stresses (psi).
 - Column 19 - Radial strains (inch/inch).

For example, the deflection data provided in column 17 represents the deflection basin at the radial distances listed in column 15.

It should be noted that for all stresses, a negative sign implies compression while a negative sign implies tension.

EXAMPLE What is the tensile (radial) stress at the bottom of the AC and at the top of the base layers of the pavement section with SHRP ID = 893002 on page A-3.

From column 8, at a depth of 9.5 inches (the thickness of the AC layer in column 5), the radial (tensile) stress at the bottom of the AC is 85.4 psi.

From column 8, at a depth of 9.5 inches (the thickness of the AC layer in column 5), the radial (tensile) stress at the top of the base is 0.6 psi.

Mechanistic responses - North Atlantic Region.

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.								
		NO.	TYPE	THICK	MODULUS		POIS		DEF (mil)	STRESS (psi)		SHR	STRAIN		RAD. DIST. (in)	RADIAL		STRESS		STRAIN	
										RADIAL	VERT		RADIAL	VERT		DISPL	DEFLECT (mil)	RADIAL	STRESS	RADIAL	STRAIN
893002	4	1	AC	9.5	1941100	0.15	0	6.62	-115.7	-79.6	0	-0.004301	-0.002148	0	0	6.62	-113.45	-0.004301	-0.000839		
		2	BASE	8.6	56300	0.35	9.5	6.41	85.4	-6	-5.3	0.003670	-0.00171	8	0.2414	6.1409	-27.2	-0.000255			
		3	SUBBASE	14.2	18700	0.35	9.5	6.41	0.6	-6	-5.3	0.003670	-0.0094	12	0.2651	5.8465	-8.84	0.000269			
		4	ROADBED	27.7	19100	0.35	18.1	5.838	1.7	-2	-0.1	0.003137	-0.005622	18	0.2614	5.4762	1.72	0.00057			
893015							18.1	5.838	-0.2	-2	-0.1	0.003137	-0.01002	24	0.2353	5.1415	8.31	0.000744			
							32.3	4.852	-0.3	-1.1	0	0.000977	-0.004858	36	0.1489	4.6411	15.58	0.000595			
							32.3	4.852	-0.3	-1.1	0	0.000977	-0.00479	60	0.0237	4.2718	11.79	0.000315			
893015	4	1	AC	8.1	5738700	0.15	0	6.656	-159.3	-79.6	0	-0.002105	-0.000492	0	0	6.656	-157.86	-0.002105	-0.000566		
		2	BASE	13	23800	0.35	8.1	6.596	139	-3.6	-10.9	0.002025	-0.000819	8	0.1225	6.4251	-48.37	-0.00022			
		3	SUBBASE	36	15600	0.35	8.1	6.596	-0.4	-3.6	-10.9	0.002025	-0.007911	12	0.1394	6.2643	-20.22	0.000123			
		4	ROADBED	20	18600	0.35	21.1	5.858	-0.2	-1.2	0	0.001162	-0.004455	18	0.1401	6.0347	1.63	0.000307			
893015							21.1	5.858	-0.4	-1.2	0	0.001162	-0.006144	24	0.1266	5.8233	13.29	0.000409			
							57.1	4.408	-0.4	-0.7	0	-0.000133	-0.002755	36	0.0788	5.5036	25.98	0.000315			
							57.1	4.408	-0.4	-0.7	0	-0.000133	-0.002279	60	0.0126	5.2693	18.48	0.0003743			
893015	4	1	AC	8.4	2821300	0.15	0	6.235	-141.4	-79.6	0	-0.003743	-0.001197	0	0	6.235	-139.76	-0.003743	-0.000874		
		2	BASE	13.6	35500	0.35	8.4	6.107	117.3	-5.3	-9.3	0.003478	-0.001491	8	0.214	5.8212	-38.39	-0.000286			
		3	SUBBASE	36	14200	0.35	8.4	6.107	-0.2	-5.3	-9.3	0.003478	-0.01074	12	0.2392	5.5445	-13.94	0.000262			
		4	ROADBED	20	26400	0.35	22	5.175	0.5	-1.5	0	0.002343	-0.005225	18	0.2362	5.1694	3.05	0.000539			
91803							22	5.175	-0.3	-1.5	0	0.002343	-0.009233	24	0.2111	4.8318	11.64	0.00068			
							58	3.196	-0.5	-0.8	0	-7.3E-05	-0.003406	36	0.1303	4.3268	21.11	0.000518			
							58	3.196	-0.5	-0.8	0	-7.3E-05	-0.001798	60	0.0206	3.96	14.91	0.000518			
	3	1	AC	7	673200	0.3	0	11.5	-137.2	-79.6	0	-0.01039	0.001156	0	0	11.5	-144.27	-0.01039	-0.001854		
91803		2	BASE	9.6	94000	0.35	7	11.07	78.9	-21.7	-6.9	0.008951	-0.01052	8	0.5597	10.0913	-34.5	7.4E-05			
		3	ROADBED	43.4	13600	0.35	7	11.07	2.4	-21.7	-6.9	0.008951	-0.02291	12	0.5997	9.256	-7.05	0.001175			
							16.6	9.712	11.2	-3.4	-0.5	0.008894	-0.01206	18	0.5474	8.3016	2.75	0.001416			
							16.6	9.712	0.2	-3.4	-0.5	0.008894	-0.0251	24	0.469	7.5229	5.71	0.001477			
91803														36	0.2836	6.4446	10.97	0.001477			
91803	3	1	AC	7.2	812800	0.3	0	12.76	-152.4	-79.6	0	-0.009865	0.002167	0	0	12.76	-160.44	-0.009865	-0.002054		
		2	BASE	14.4	51500	0.35	7.2	12.4	107	-16.1	-8.2	0.009562	-0.01016	8	0.5407	11.4577	-42.67	-0.001227			
		3	ROADBED	38.4	11100	0.35	7.2	12.4	0.3	-16.1	-8.2	0.009562	-0.02692	12	0.5875	10.645	-10.45	0.001484			
							21.6	10.34	4.2	-2.3	-0.2	0.006732	-0.01017	18	0.5364	9.6628	3.99	0.00145			
							21.6	10.34	0	-2.3	-0.2	0.006732	-0.02017	24	0.4535	8.8564	7.88	0.001024			
														36	0.2642	7.757	13.28	0.00145			
														60	0.0407	7.0108	9.41	0.001024			

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.							
		NO.	TYPE	THICK	MODULUS		POIS	DEF (mil)	STRESS (psi)			RADIAL STRAIN		DIST. (in)	RADIAL DEFLECTI (mil)		STRESS		STRAIN	
									RADIAL	VERT	SHR	RADIAL	VERT		RADIAL	DEFLECTI	RADIAL	STRESS	RADIAL	STRAIN
95001	4	1	AC	8.3	2973100	0.15	0	5.275	-133.6	-79.6	0	-0.003331	-0.001218	0	0	5.275	-131.92	0	-0.003331	
		2	BASE	15.6	64600	0.35	8.3	5.153	107.3	-7.2	-9.4	0.003028	-0.001376	8	0.1868	4.9001	-32.19	0.1868	-0.000659	
		3	SUBBASE	36	25400	0.35	8.3	5.153	-0.2	-7.2	-9.4	0.003028	-0.009078	12	0.2045	4.6575	-9.05	0.2045	-0.000143	
		4	ROADBED	20	26700	0.35	23.9	4.339	0.9	-1.8	-0.1	0.001778	-0.00363	18	0.1963	4.3414	5.36	0.1963	0.000299	
101450							23.9	4.339	-0.2	-1.8	-0.1	0.001778	-0.006238	24	0.172	4.0638	11.39	0.172	0.000488	
							59.9	3.113	-0.4	-0.8	0	3.7E-05	-0.001932	36	0.103	3.6628	18.22	0.103	0.000558	
							59.9	3.113	-0.4	-0.8	0	3.7E-05	-0.001837	60	0.016	3.3793	12.22	0.016	0.000403	
		1	AC	9.3	1326600	0.3	0	4.665	-88.7	-79.6	0	-0.002763	-0.001794	0	0	4.665	-92.64	0	-0.002763	
111400		2	BASE	6.8	1264100	0.2	9.3	4.374	6.3	-23.1	-3.1	0.000815	-0.002076	8	0.148	4.2344	-17.37	0.148	-0.000405	
		3	SUBBASE	36	11700	0.35	9.3	4.374	7.2	-23.1	-3.1	0.000815	-0.002034	12	0.1596	4.0365	-4.71	0.1596	-0.000164	
		4	ROADBED	20	40000	0.35	16.1	4.285	34.1	-1.5	-2	0.002153	-0.001224	18	0.1641	3.8608	-4.27	0.1641	0	
							16.1	4.285	-0.3	-1.5	-2	0.002153	-0.009728	24	0.1574	3.6987	0.11	0.1574	0.000226	
231009		3	1	AC	13.1	1423400	0.33	0	4.6	-100.2	-79.6	0	-0.002762	-0.000742	0	0	4.6	-107.6	0	-0.002762
			2	BASE	36	47300	0.45	13.1	4.275	50.5	-4	-2.8	0.002427	-0.002673	8	0.1532	4.1718	-24.99	0.1532	-0.000639
			3	ROADBED	20	20900	0.45	13.1	4.275	-0.7	-4	-2.8	0.002427	-0.005988	12	0.1717	3.9588	-8.14	0.1717	-0.000248
							49.1	3.433	-0.3	-0.8	0	0.000319	-0.000944	18	0.1754	3.7438	-4.39	0.1754	6.6E-05	
231026							49.1	3.433	-0.5	-0.8	0	0.000319	-0.001479	24	0.1636	3.5509	1.13	0.1636	0.000309	
							49.1	3.433	-0.5	-0.8	0	0.000319	-0.001479	36	0.111	3.2586	7.46	0.111	0.000495	
							60	0.0181	3.037	7.43	0.000453	0.000453	60	0.0181	3.037	7.43	0.0181	0.000453		
		4	1	AC	5.5	1003800	0.31	0	15.28	-218.9	-79.6	0	-0.01296	0.005469	0	0	15.28	-248.95	0	-0.01296
231026			2	BASE	3.6	23100	0.35	5.5	15.06	185.5	-15.5	-7	0.0136	-0.0126	8	0.6879	13.4801	-67.36	0.6879	-0.002339
			3	SUBBASE	25.2	27800	0.35	5.5	15.06	-2.3	-15.5	-7	0.0136	-0.05048	12	0.7278	12.2525	-10.43	0.7278	0.000701
			4	ROADBED	25.7	10200	0.35	9.1	13.52	-1.9	-9.5	-0.3	0.009113	-0.03533	18	0.6107	10.7167	16.76	0.6107	0.002296
							9.1	13.52	-1.2	-9.5	-0.3	0.009113	-0.0311	24	0.4769	9.5473	16.35	0.4769	0.002163	
231026							34.3	9.745	1	-1.6	0	0.004128	-0.008001	36	0.2339	8.0885	19.76	0.2339	0.001612	
							34.3	9.745	-0.2	-1.6	0	0.004128	-0.01387	60	0.0329	7.2332	9.8	0.0329	0.000836	
		3	1	AC	6.4	797400	0.31	0	11.62	-190.2	-79.6	0	-0.01308	0.005723	0	0	11.62	-203.7	0	-0.01308
			2	BASE	19.2	23100	0.35	6.4	11.3	155	-14.6	-13.6	0.01372	-0.01433	8	0.711	9.8858	-55.71	0.711	-0.002648
231026							6.4	11.3	-1.2	-14.6	-13.6	0.01372	-0.04566	12	0.7656	8.7165	-11.83	0.7656	0.000291	
							25.6	6.744	0.1	-2.8	-0.1	0.004587	-0.01254	18	0.6886	7.2624	10.62	0.6886	0.002116	
							25.6	6.744	-0.2	-2.8	-0.1	0.004587	-0.01434	24	0.5359	6.1136	13.34	0.5359	0.002243	
							25.6	6.744	-0.2	-2.8	-0.1	0.004587	-0.01434	36	0.2731	4.6416	17.2	0.2731	0.001804	
231026							25.6	6.744	-0.2	-2.8	-0.1	0.004587	-0.01434	60	0.0382	3.749	8.9	0.0382	0.00097	

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						RAD. DIST. (in)	MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULUS		POIS		DEF (mil)	STRESS (psi)		SHR		STRAIN		RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN
										RADIAL	VERT			RADIAL	VERT				
231026	4	1	AC	6.4	528700	0.31	0	8.572	-138.8	-79.6	0	-0.01311	0.002261	0	0	8.572	-147.75	-0.01311	
		2	BASE	16	62000	0.35	6.4	8.062	84.6	-25.4	-8.8	0.01228	-0.01511	8	0.668	6.7035	-27.82	-0.001301	
		3	SUBBASE	36	15300	0.35	6.4	8.062	-0.7	-25.4	-8.8	0.01228	-0.03673	12	0.6746	5.6285	1.39	0.001212	
		4	ROADBED	20	49100	0.35	22.4	5.265	5	-3.1	-0.2	0.006895	-0.01069	18	0.5526	4.5114	8.32	0.002114	
							22.4	5.265	0	-3.1	-0.2	0.006895	-0.02013	24	0.4373	3.6953	6.57	0.001788	
							58.4	1.835	-0.5	-1	0	0.000133	-0.00425	36	0.2396	2.6895	8.19	0.001388	
							58.4	1.835	-0.5	-1	0	0.000133	-0.00145	60	0.0362	2.0575	5.49	0.000914	
							0	10.6	-153.6	-79.6	0	-0.01438	0.003315	0	0	10.6	-162.22	-0.01438	
231028	4	1	AC	6.6	565600	0.3	0	10.6	-153.6	-79.6	0	-0.01438	0.003315	0	0	10.6	-162.22	-0.01438	
		2	BASE	18.7	30100	0.35	6.6	10.1	115.1	-18.6	-10.6	0.01489	-0.01595	8	0.7423	8.6098	-33.15	-0.001653	
		3	SUBBASE	36	49700	0.35	6.6	10.1	-1.6	-18.6	-10.6	0.01489	-0.04907	12	0.753	7.3988	1.64	0.001463	
		4	ROADBED	20	20900	0.35	25.3	5.448	-1.1	-4.2	-0.1	0.002531	-0.01127	18	0.5941	6.0675	14.11	0.002893	
							25.3	5.448	-0.3	-4.2	-0.1	0.002531	-0.008047	24	0.4335	5.1215	11.59	0.002452	
							61.3	4.073	0	-0.9	0	0.00063	-0.001838	36	0.1833	4.0712	10.05	0.001496	
							61.3	4.073	-0.3	-0.9	0	0.00063	-0.003364	60	0.0213	3.5483	3.57	0.000556	
							0	13.39	-136.4	-79.6	0	-0.01786	0.001985	0	0	13.39	-143.93	-0.01786	
231028	4	1	AC	6.3	390200	0.3	0	13.39	-136.4	-79.6	0	-0.01786	0.001985	0	0	13.39	-143.93	-0.01786	
		2	BASE	20.4	39400	0.35	6.3	12.68	88.8	-25.3	-9.9	0.01751	-0.02068	8	0.8802	10.807	-22.11	-0.000815	
		3	SUBBASE	36	33000	0.35	6.3	12.68	-1.6	-25.3	-9.9	0.01751	-0.05559	12	0.8495	9.3462	7.24	0.00267	
		4	ROADBED	20	14100	0.35	26.7	7.757	0.4	-3.8	-0.1	0.003893	-0.009997	18	0.6286	7.9137	12.92	0.003593	
							26.7	7.757	0	-3.8	-0.1	0.003893	-0.01138	24	0.4459	6.9643	8.21	0.00261	
							62.7	5.926	-0.1	-0.8	0	0.000691	-0.002336	36	0.1958	5.9573	6.53	0.001474	
							62.7	5.926	-0.3	-0.8	0	0.000691	-0.004416	60	0.0253	5.4473	2.86	0.00065	
							0	8.482	-74.4	-79.6	0	-0.005034	-0.006628	0	0	8.482	-81.11	-0.005034	
237023	4	1	AC	6.3	394500	0.35	0	8.482	-74.4	-79.6	0	-0.005034	-0.006628	0	0	8.482	-81.11	-0.005034	
		2	BASE	7.8	1267100	0.15	6.3	7.79	-33.4	-51.6	-4.6	-0.00675	-0.007081	8	0.2887	7.391	-14.4	-0.001264	
		3	SUBBASE	9.6	14800	0.35	6.3	7.79	-19.9	-51.6	-4.6	-0.00675	-0.00357	12	0.335	6.9663	-5.33	-0.001029	
		4	ROADBED	36.3	15500	0.35	14.1	7.629	58.3	-3	-3.2	0.003856	-0.001666	18	0.3821	6.8448	-5.74	-0.000412	
							14.1	7.629	-0.4	-3	-3.2	0.003856	-0.01419	24	0.3787	6.3114	-0.46	0.000455	
							23.7	6.591	-0.4	-1.5	0	0.001809	-0.008302	36	0.2714	5.7766	4.57	0.001125	
							23.7	6.591	-0.4	-1.5	0	0.001809	-0.008059	60	0.0449	5.358	5.13	0.001122	
							0	4.966	-100	-79.6	0	-0.003843	-0.002544	0	0	4.966	-98.23	-0.003843	
245807	4	1	AC	8.9	1839100	0.15	0	4.966	-100	-79.6	0	-0.003843	-0.002544	0	0	4.966	-98.23	-0.003843	
		2	BASE	4.8	286300	0.2	8.9	4.741	56.9	-13.3	-3.7	0.002653	-0.001723	8	0.2062	4.5156	-16.32	-0.000409	
		3	SUBBASE	21.6	62800	0.35	8.9	4.741	6.4	-13.3	-3.7	0.002653	-0.005331	12	0.215	4.263	-1.49	3.3E-05	
		4	ROADBED	24.7	24400	0.35	13.7	4.557	10.5	-4.9	-0.7	0.003253	-0.003184	18	0.201	3.9783	4.04	0.000347	
							13.7	4.557	0.6	-4.9	-0.7	0.003253	-0.008414	24	0.1754	3.7342	7.02	0.000494	
							35.3	3.706	0.4	-1.1	0	0.000989	-0.002182	36	0.1073	3.3867	10.96	0.000556	
							35.3	3.706	-0.2	-1.1	0	0.000989	-0.003928	60	0.0168	3.1397	7.89	0.000421	

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						RAD. DIST. (in)	MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULUS		POIS	DEF (mil)	STRESS (psi)			STRAIN			RAD. DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN	
									RADIAL	VERT	SHR	RADIAL		VERT					
251002	4	1	AC	7.6	591700	0.31	0	11.91	-151	-79.6	0	-0.01299	0.003305	0	11.91	-160.28	-0.01299		
		2	BASE	4.1	69000	0.35	7.6	11.41	101.6	-12.8	-4.1	0.01223	-0.01332	8	10.2117	-47.45	-0.003319		
		3	SUBBASE	8.4	8800	0.35	7.6	11.41	6.8	-12.8	-4.1	0.01223	-0.02368	12	9.125	-15.53	-0.000612		
		4	ROADBED	39.9	18600	0.35	11.7	10.55	14.3	-5.1	-0.6	0.01601	-0.02209	18	7.7697	1.13	0.001425		
251003							11.7	10.55	-0.5	-5.1	-0.6	0.01601	-0.05226	24	6.663	8.11	0.002105		
							20.1	7.321	-1.1	-3.2	0	0.004249	-0.02669	36	3.9258	5.0122	0.002161		
							20.1	7.321	-0.5	-3.2	0	0.004249	-0.01517	60	3.9253	9.75	0.001433		
	4	1	AC	6.7	1299900	0.3	0	12.28	-203.7	-79.6	0	-0.008919	0.003851	0	12.28	-216.12	-0.008919		
331001							6.7	12.07	176.7	-9.7	-11.7	0.009545	-0.009189	8	11.1267	-68.01	-0.002274		
							6.7	12.07	-1.5	-9.7	-11.7	0.009545	-0.04031	12	10.3375	-21.69	-0.000262		
							18.8	8.541	-1.6	-3.7	0	0.001791	-0.0188	18	9.2607	7.2	0.001242		
							18.8	8.541	-0.9	-3.7	0	0.001791	-0.007746	24	8.3718	15.08	0.001597		
331001							54.8	7.028	0.1	-0.9	0	0.00091	-0.002383	36	7.1738	22.42	0.001441		
							54.8	7.028	-0.3	-0.9	0	0.00091	-0.005379	60	6.4188	11.91	0.000803		
	4	1	AC	8.2	800500	0.3	0	8.702	-144.2	-79.6	0	-0.009418	0.001387	0	8.702	-151.98	-0.009418		
		2	BASE	19.3	29400	0.35	8.2	8.29	106.1	-10.3	-7.9	0.009439	-0.009456	8	0.5293	-42.47	-0.002233		
331001							8.2	8.29	-0.2	-10.3	-7.9	0.009439	-0.02821	12	0.5668	-13.52	-0.0004		
							27.5	5.521	1.3	-1.9	0	0.00494	-0.00933	18	0.5554	5.7829	1.53		
							27.5	5.521	-0.3	-1.9	0	0.00494	-0.01855	24	0.478	4.9853	7.68		
							41.9	3.507	-0.6	-1.3	0	0.000576	-0.009746	36	0.2804	3.8699	13.91		
331001							41.9	3.507	-0.5	-1.3	0	0.000576	-0.003543	60	0.0425	3.1067	9.65		
	4	1	AC	8.5	866000	0.3	0	8.218	-141.1	-79.6	0	-0.00844	0.001056	0	8.218	-148.56	-0.00844		
		2	BASE	19.3	29700	0.35	8.5	7.825	102.9	-9.4	-7.3	0.008431	-0.008415	8	0.4773	-42.39	-0.002094		
		3	SUBBASE	14.4	8800	0.35	8.5	7.825	-0.2	-9.4	-7.3	0.008431	-0.02514	12	0.533	-14.41	-0.000473		
341034							27.8	5.33	1.1	-1.8	0	0.004431	-0.008511	18	0.5114	5.6154	0.000816		
							27.8	5.33	-0.3	-1.8	0	0.004431	-0.01711	24	0.4452	4.8948	7.04		
							42.2	3.46	-0.6	-1.2	0	0.000496	-0.009156	36	0.2663	3.873	13.85		
							42.2	3.46	-0.5	-1.2	0	0.000496	-0.003327	60	0.0408	3.161	10		
341034	3	1	AC	12.3	1621700	0.3	0	5.257	-108.3	-79.6	0	-0.003109	-0.000725	0	5.257	-113.38	-0.003109		
		2	BASE	36	18000	0.35	12.3	4.98	65	-2.6	-3.8	0.002809	-0.002631	8	0.1771	-29.71	-0.000778		
		3	ROADBED	20	27700	0.35	12.3	4.98	-0.3	-2.6	-3.8	0.002809	-0.01041	12	0.2009	-12.38	-0.00036		
							48.3	3.068	-0.4	-0.8	0	4.2E-05	-0.002919	18	0.2088	-5.77	3.9E-05		
							48.3	3.068	-0.4	-0.8	0	4.2E-05	-0.00193	24	0.1964	4.1162	1.63		
							48.3	3.068	-0.4	-0.8	0	4.2E-05	-0.00193	36	0.1345	3.7468	10.1		
														60	0.0222	10.03	0.000554		

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULUS		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		RAD. DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN
									VERT	RADIAL		VERT	RADIAL					
341034	3	1	AC	11.7	1202000	0.3	0	5.779	-110.6	-79.6	0	-0.004291	0	0	5.779	-115.66	-0.004291	
		2	BASE	36	21000	0.35	11.7	5.417	67.7	-3.7	-4.1	0.003944	8	0.2439	5.198	-31.19	-0.0011	
		3	ROADBED	20	26900	0.35	11.7	5.417	-0.3	-3.7	-4.1	0.003944	12	0.2766	4.88	-12.32	-0.000455	
							47.7	3.217	-0.4	-0.9	0	0.000231	18	0.2834	4.5174	-4.85	0.000122	
							47.7	3.217	-0.4	-0.9	0	0.000231	24	0.263	4.1871	2.4	0.000522	
													36	0.1757	3.6808	10.28	0.000804	
													60	0.0285	3.296	9.6	0.000713	
341638	4	1	AC	9.2	1161800	0.3	0	4.631	-87.4	-79.6	0	-0.00308	0	0	4.631	-91.28	-0.00308	
		2	BASE	6.3	1306700	0.2	9.2	4.3	3.3	-2.4	-3.4	0.000778	8	0.1643	4.1464	-16.6	-0.000426	
		3	SUBBASE	36	19500	0.35	9.2	4.3	6.7	-2.4	-3.4	0.000778	12	0.1766	3.926	-4.3	-0.00017	
		4	ROADBED	20	32400	0.35	15.5	4.214	37.8	-1.9	-2.4	0.002317	18	0.1812	3.7335	-4.05	7E-06	
							15.5	4.214	-0.3	-1.9	-2.4	0.002317	24	0.1733	3.5565	0.25	0.000259	
							51.5	2.609	-0.4	-0.8	0	-1.8E-05	36	0.1231	3.2792	6.04	0.000512	
							51.5	2.609	-0.5	-0.8	0	-1.8E-05	60	0.0206	3.0625	6.64	0.000515	
341638	4	1	AC	9	1251000	0.3	0	4.247	-88.7	-79.6	0	-0.002934	0	0	4.247	-92.71	-0.002934	
		2	BASE	8.5	771100	0.2	9	3.938	12.7	-24.4	-3	-0.001244	8	0.1533	3.7807	-15.41	-0.000309	
		3	SUBBASE	36	29300	0.35	9	3.938	6.1	-24.4	-3	-0.001244	12	0.1606	3.5672	-2.37	-3.7E-05	
		4	ROADBED	20	32300	0.35	17.5	3.779	21.2	-2.3	-1.1	0.002218	18	0.1579	3.3834	-2.36	9.8E-05	
							17.5	3.779	-0.1	-2.3	-1.1	0.002218	24	0.1473	3.2211	0.76	0.000262	
							53.5	2.585	-0.4	-0.8	0	4.9E-05	36	0.1024	2.9776	5.57	0.000437	
							53.5	2.585	-0.4	-0.8	0	4.9E-05	60	0.0171	2.79	5.92	0.000426	
361008	4	1	AC	11.1	173000	0.35	0	9.367	-69.6	-79.6	0	-0.01089	0	0	9.367	-73.22	-0.01089	
		2	BASE	10.1	518100	0.35	1.1	9.156	-60	-78.6	-2.9	-0.006827	8	0.6313	7.7606	-14.25	-0.003736	
		3	SUBBASE	12	7700	0.35	1.1	9.156	-100.8	-78.6	-2.9	-0.006827	12	0.7413	6.949	-4.37	-0.001478	
		4	ROADBED	36.8	26400	0.35	11.2	8.409	80.4	-5.7	-3.1	0.009982	18	0.7542	6.0264	-1.43	0.000574	
							11.2	8.409	-0.9	-5.7	-3.1	0.009982	24	0.6839	5.1838	1.28	0.001615	
							23.2	4.686	-1.1	-2.4	0	0.001558	36	0.4343	3.9295	4.11	0.002153	
							23.2	4.686	-0.7	-2.4	0	0.001558	60	0.0678	3.0132	3.34	0.001702	
361011	3	1	AC	9.6	335200	0.31	0	10.06	-105.5	-79.6	0	-0.01375	0	0	10.06	-111.25	-0.01375	
		2	BASE	15	33800	0.35	9.6	8.89	57.2	-13.3	-3.7	0.01254	8	0.7282	7.9947	-22.36	-0.001991	
		3	ROADBED	35.4	22000	0.35	9.6	8.89	0.1	-13.3	-3.7	0.01254	12	0.7655	6.9207	-2.39	0.00037	
							24.6	6.009	0.8	-3.2	-0.1	0.004847	18	0.6855	5.8561	2.61	0.001738	
							24.6	6.009	0	-3.2	-0.1	0.004847	24	0.5695	5.0134	4.86	0.002046	
													36	0.3196	3.921	6.85	0.001833	
													60	0.0461	3.2263	4.43	0.001169	

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULUS		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		RADIAL DISPL (in)	DEFLECT (mil)	STRESS	STRAIN
									RADIAL	VERT		RADIAL	VERT				
364017	4	1	AC	8.9	4336000	0.15	0	4.335	-124.1	-79.6	0	-0.002094	-0.000903	0	4.335	-122.15	-0.002094
		2	BASE	15	120500	0.35	8.9	4.246	94.6	-6.8	-7.6	0.001827	-0.000846	8	4.1017	-30.18	-0.000425
		3	SUBBASE	36	12900	0.35	8.9	4.246	0.4	-6.8	-7.6	0.001827	-0.004885	12	0.1299	-9.81	-0.000124
		4	ROADBED	20	40000	0.35	23.9	3.836	2.2	-1.2	-0.1	0.001478	-0.002227	18	0.1275	3.7646	0.000143
371006							23.9	3.836	-0.3	-1.2	-0.1	0.001478	-0.007183	24	0.1142	3.5944	0.000284
							59.9	2.098	-0.5	-0.8	0	-0.000166	-0.003521	36	0.0717	3.3403	0.000362
							59.9	2.098	-0.5	-0.8	0	-0.000166	-0.001013	60	0.0115	3.1553	0.000287
371006	4	1	AC	9	1213400	0.3	0	7.788	-139.7	-79.6	0	-0.005925	0.000683	0	7.788	-146.95	-0.005925
		2	BASE	9.7	19100	0.35	9	7.493	105.1	-6.9	-5.5	0.006074	-0.005921	8	0.3387	-43.81	-0.001588
		3	SUBBASE	36	37000	0.35	9	7.493	-1	-6.9	-5.5	0.006074	-0.02319	12	0.3826	-16.2	-0.000445
		4	ROADBED	20	19000	0.35	18.7	5.828	-1.1	-3.1	0	0.001816	-0.01193	18	0.3727	-0.94	0.000522
371006							18.7	5.828	-0.6	-3.1	0	0.001816	-0.007148	24	0.3267	5.4463	0.000937
							54.7	4.454	-0.2	-0.9	0	0.00051	-0.002036	36	0.1953	4.7043	0.001054
							54.7	4.454	-0.3	-0.9	0	0.00051	-0.003385	60	0.0295	4.189	0.000743
371040	4	1	AC	9.3	967300	0.3	0	8.774	-131.3	-79.6	0	-0.006815	0.000317	0	8.774	-137.86	-0.006815
		2	BASE	9	24500	0.35	9.3	8.393	93.7	-7.4	-4.6	0.006816	-0.006771	8	0.387	-39.41	-0.001747
		3	SUBBASE	36	26600	0.35	9.3	8.393	-0.6	-7.4	-4.6	0.006816	-0.02223	12	0.4347	-13.93	-0.000472
		4	ROADBED	20	16900	0.35	18.3	6.953	-0.5	-3.2	-0.1	0.003222	-0.01145	18	0.4231	-1	0.000582
371040							18.3	6.953	-0.4	-3.2	-0.1	0.003222	-0.01091	24	0.3719	6.1295	0.001044
							54.3	5.019	-0.2	-0.9	0	0.000543	-0.002643	36	0.2248	5.3139	0.00119
							54.3	5.019	-0.3	-0.9	0	0.000543	-0.003799	60	0.0342	4.7445	0.000862
371040	3	1	AC	5.3	655900	0.31	0	29.46	-265.5	-79.6	0	-0.02483	0.01279	0	29.46	-302.38	-0.02483
		2	BASE	14.4	9400	0.35	5.3	29.15	236	-14.5	-20.2	0.02602	-0.02356	8	1.3592	-94.78	-0.005698
		3	ROADBED	40.3	6400	0.35	5.3	29.15	-1.5	-14.5	-20.2	0.02602	-0.09252	12	1.4855	-26.4	0.000117
							19.7	20.9	0.5	-3.2	-0.1	0.01492	-0.03724	18	1.3183	20.1842	0.003829
371645							19.7	20.9	-0.2	-3.2	-0.1	0.01492	-0.04719	24	1.0728	17.4558	0.004266
														36	0.5528	13.8592	0.003656
														60	0.0799	11.615	0.002021
371645	4	1	AC	8.1	775600	0.3	0	5.617	-100.1	-79.6	0	-0.005784	-0.002126	0	5.617	-105.03	-0.005784
		2	BASE	8.3	203200	0.2	8.1	5.161	37.6	-23.6	-4	0.004184	-0.00606	8	0.2969	-16.61	-0.000445
		3	SUBBASE	36	54600	0.35	8.1	5.161	5.1	-23.6	-4	0.004184	-0.01218	12	0.3004	4.2995	0.000347
		4	ROADBED	20	26700	0.35	16.4	4.585	8.7	-5.6	-0.6	0.003924	-0.004445	18	0.2639	3.8958	0.00068
							16.4	4.585	0.5	-5.6	-0.6	0.003924	-0.01063	24	0.2218	3.5818	0.000729
							52.4	3.176	-0.1	-0.9	0	0.000457	-0.001477	36	0.1314	3.1686	0.000698
							52.4	3.176	-0.3	-0.9	0	0.000457	-0.002562	60	0.0199	2.8945	0.000502

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION			DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						RAD. DIST. (in)	MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK		MODULUS	POIS	STRESS (psi)			STRAIN			RADIAL DISPL	DEFLECT (in)	STRESS	STRAIN	
								DEF (in)	RADIAL	VERT	SHR		RADIAL					VERT
371803	3	1	AC	5.1	472900	0.31	0	35.59	-200.6	-79.6	0	-0.02468	0	0	35.59	-226.15	-0.02468	
		2	BASE	13.2	33400	0.35	5.1	35.18	141.8	-26.6	-14.8	0.02298	8	1.2781	32.1296	-54.59	-0.003663	
		3	ROADBED	41.7	3900	0.35	5.1	35.18	-0.8	-26.6	-14.8	0.02299	12	1.335	29.8725	-6.71	0.00141	
							18.3	30.3	10	-2.6	-0.4	0.02174	18	1.1414	27.1658	10.13	0.003519	
371817							18.3	30.3	0	-2.6	-0.4	0.02174	24	0.9424	25.0717	9.26	0.003281	
													36	0.5434	22.2875	16.54	0.003018	
													60	0.086	20.41	11.77	0.002158	
372824	4	1	AC	4.7	565800	0.35	0	30.48	-269.1	-79.6	0	-0.02219	0	0	30.48	-301.09	-0.02219	
		2	BASE	12	38100	0.35	4.2	30.28	204.7	-29.1	-27	0.02043	8	1.114	27.1818	-66.01	-0.00252	
		3	ROADBED	43.8	5000	0.35	4.2	30.28	-1.9	-29.1	-27	0.02043	12	1.1363	24.9525	-2.91	0.001834	
							16.2	25.81	11.7	-3.3	-0.5	0.0223	18	0.94	22.2633	18.44	0.003355	
372825							16.2	25.81	0.1	-3.3	-0.5	0.0223	24	0.7623	20.2142	12.58	0.002845	
													36	0.4227	17.5208	22.75	0.002516	
													60	0.0662	15.7875	14.37	0.00166	
373816	4	1	AC	4.2	1470700	0.3	0	7.049	-112.6	-79.6	0	-0.003721	0	0	7.049	-119.2	-0.003721	
		2	BASE	7.7	1128000	0.2	4.2	6.942	-13.9	-56.3	-7.7	0.000552	8	0.2054	6.5401	-27.14	-0.000703	
		3	SUBBASE	36	38300	0.35	4.2	6.942	-7	-56.3	-7.7	0.000552	12	0.2251	6.263	-9.08	-0.00215	
		4	ROADBED	20	15800	0.35	11.9	6.727	50	-4.5	-3.7	0.003542	18	0.2233	5.9584	-2.85	0.000188	
373816							11.9	6.727	-0.1	-4.5	-3.7	0.003542	24	0.2035	5.6881	3.01	0.000452	
							47.9	5.236	-0.1	-0.8	0	0.000492	36	0.1327	5.2849	9.92	0.00063	
							47.9	5.236	-0.3	-0.8	0	0.000492	60	0.0212	4.9878	8.69	0.000532	
373816	4	1	AC	9.1	8739300	0.15	0	5.098	-125.9	-79.6	0	-0.001057	0	0	5.098	-124.03	-0.001057	
		2	BASE	4.1	848900	0.2	9.1	5.054	89.5	-5.9	-4	0.000858	8	0.061	4.9839	-34.88	-0.000258	
		3	SUBBASE	36	8700	0.35	9.1	5.054	7.9	-5.9	-4	0.000858	12	0.0689	4.91	-15.21	-0.000114	
		4	ROADBED	20	30300	0.35	13.2	5.022	13.6	-1	-0.8	0.001304	18	0.0706	4.8102	-1.8	3.2E-05	
							13.2	5.022	-0.4	-1	-0.8	0.001304	24	0.0654	4.717	7.98	0.000131	
							49.2	2.76	-0.4	-0.8	0	-0.000277	36	0.0433	4.5713	19.26	0.000204	
							49.2	2.76	-0.5	-0.8	0	-0.000277	60	0.0071	4.4583	15.85	0.000178	

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULUS		POIS	STRESS (psi)			STRAIN			RADIAL DEFLECT (mil)		STRESS	
								DEF (mil)	RADIAL	VERT	SHR	RADIAL	VERT	DISPL	RADIAL	STRESS	RADIAL
373816	4	1	AC	9.5	8120900	0.15	0	5.596	-119.5	-79.6	0	-0.001069	-0.0005	0	5.596	-117.37	-0.001069
		2	BASE	4.2	791200	0.2	9.5	5.545	82.7	-5.5	-3.5	0.000851	-0.000395	8	0.0613	5.4789	-31.98
		3	SUBBASE	36	7900	0.35	9.5	5.545	7.2	-5.5	-3.5	0.000851	-0.000981	12	0.069	5.4065	-13.76
		4	ROADBED	20	26900	0.35	13.7	5.513	12.5	-1	-0.7	0.00128	-0.000768	18	0.0708	5.3101	-1.97
375037							13.7	5.513	-0.4	-1	-0.7	0.00128	-0.009121	24	0.0658	5.2194	7.2
							49.7	3.09	-0.4	-0.7	0	-0.000315	-0.005509	36	0.0438	5.0768	17.77
							49.7	3.09	-0.5	-0.7	0	-0.000315	-0.001374	60	0.0072	4.9678	14.96
	4	1	AC	7.7	4570400	0.15	0	8.277	-175.8	-79.6	0	-0.002904	-0.000462	0	0	8.277	-172.14
421597							7.7	8.206	156.2	-4.2	-12.4	0.002842	-0.001168	8	0.1697	7.9556	-56.26
							7.7	8.206	-0.6	-4.2	-12.4	0.002842	-0.01506	12	0.1946	7.7248	-23.51
							22.7	6.473	-0.5	-1.2	0	0.00083	-0.008856	18	0.1957	7.3887	2.05
							22.7	6.473	-0.5	-1.2	0	0.00083	-0.005846	24	0.1762	7.0793	15.21
421597							58.7	4.981	-0.4	-0.7	0	-0.00012	-0.002935	36	0.1086	6.6133	29.25
							58.7	4.981	-0.4	-0.7	0	-0.00012	-0.002624	60	0.0173	6.2735	20.22
	3	1	AC	6.6	833300	0.31	0	13.15	-188.1	-79.6	0	-0.01233	0.005288	0	0	13.15	-201.18
							6.6	12.84	150.2	-14	-12	0.0127	-0.01325	8	0.6825	11.5361	-58.94
421597							6.6	12.84	-0.6	-14	-12	0.0127	-0.03921	12	0.7496	10.4425	-16.69
							22.6	9.439	1.8	-2.4	-0.1	0.007344	-0.01364	18	0.6823	9.0502	6.03
							22.6	9.439	-0.5	-2.4	-0.1	0.007344	-0.01797	24	0.5695	7.9048	11.36
														36	0.317	6.3518	18.23
421597														60	0.0475	5.33	11.48
	3	1	AC	6.3	740100	0.31	0	15.39	-207.9	-79.6	0	-0.01574	0.007714	0	0	15.39	-223.11
							6.3	15.06	174.4	-13.1	-14.5	0.01652	-0.01692	8	0.8715	13.3246	-66.74
							6.3	15.06	-1	-13.1	-14.5	0.01652	-0.05479	12	0.9569	11.895	-18.97
421690							23.1	9.9	0.6	-2.7	-0.1	0.00773	-0.01846	18	0.8642	10.0187	8.25
							23.1	9.9	-0.6	-2.7	-0.1	0.00773	-0.01912	24	0.7113	8.4873	13.89
														36	0.3826	6.4372	21.04
														60	0.0558	5.1267	12.04
421690														0	0	0	-0.01574
	4	1	AC	10.5	4081900	0.15	0	3.124	-101.3	-79.6	0	-0.001764	-0.001141	0	0	3.124	-99.79
							10.5	3.015	68.5	-5.5	-5	0.001411	-0.000667	8	0.0973	2.9243	-20
							10.5	3.015	0.3	-5.5	-5	0.001411	-0.003785	12	0.1046	2.81	-5.65
421690							10.5	3.015	1.1	-1.6	-0.1	0.000978	-0.001829	18	0.1028	2.6749	1.27
							22.5	2.729	-0.2	-1.6	-0.1	0.000978	-0.00344	24	0.0928	2.5533	6.58
							58.5	2.062	-0.4	-0.7	0	4E-06	-0.00107	36	0.0594	2.3722	12.66
							58.5	2.062	-0.4	-0.7	0	4E-06	-0.001155	60	0.0095	2.2375	9.92
421690														0	0	0	-0.00238
														0	0	0	-0.00238
														0	0	0	-0.00238
														0	0	0	-0.00238

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.						
		NO.	TYPE	THICK	MODULUS		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		RAD. DIST. (in)	RADIAL DISPL	DEFLECTI (mil)	RADIAL STRESS	RADIAL STRAIN	
									RADIAL	VERT		RADIAL	VERT						
501683	4	1	AC	2.5	1761700	0.3	0	14.23	-423.1	-79.6	0	-0.01576	0.01043	0	0	14.23	-488.77	-0.01576	
		2	BASE	2.8	192100	0.35	2.5	14.21	272.1	-46.5	-37.8	0.01159	-0.01235	8	0.7126	11.2142	-68.86	-6.1E-05	
		3	SUBBASE	36	23300	0.35	2.5	14.21	11.3	-46.5	-37.8	0.01159	-0.02714	12	0.6657	9.2447	30.26	0.002689	
		4	ROADBED	20	20700	0.35	5.3	13.42	64	-19.8	-6.7	0.02532	-0.03414	18	0.462	7.0751	55.16	0.003082	
511002	3						5.3	13.42	-0.2	-19.8	-6.7	0.02532	-0.07617	24	0.3238	5.6427	21.19	0.001926	
							41.3	4.895	-0.1	-1.6	0	-0.00616	-0.00816	36	0.1337	4.0797	25.93	0.001152	
							41.3	4.895	-0.2	-1.6	0	0.002144	-0.007223	60	0.0179	3.319	9.34	0.000456	
							0	31.26	-232.4	-79.6	0	-0.03088	0.01254	0	0	31.26	-261.69	-0.03088	
511419	4	1	AC	5.7	462300	0.3	5.7	30.78	204.4	-13.3	-13.2	0.03255	-0.02804	8	1.6958	27.1145	-80.72	-0.007089	
			2	BASE	7.8	6900	0.35	5.7	30.78	-1.6	-13.3	-13.2	0.03255	-0.1191	12	1.853	24.145	-21.34	0.000172
			3	ROADBED	46.5	7000	0.35	13.5	23.75	-0.7	-5.1	-0.1	0.01952	-0.06693	18	1.6409	20.1958	13.06	0.00485
							13.5	23.75	-0.6	-5.1	-0.1	0.01952	-0.06639	24	1.3291	16.9992	18.4	0.005413	
512564	4						51.3	1.323	-0.2	-1	0	0.000316	-0.000773	36	0.6762	12.8392	25.62	0.004534	
							51.3	1.323	-0.5	-1	0	0.000316	-0.000961	60	0.0956	10.2775	12.97	0.002424	
							0	2.744	-106	-79.6	0	-0.003406	-0.000631	0	0	2.744	-112.95	-0.003406	
							9.6	2.449	54.9	-13.3	-2.5	0.003062	-0.003817	8	0.1815	2.2239	-23.58	-0.000554	
515010	4	1	AC	7.9	2944800	0.15	7.9	5.734	96.4	-11.2	-6	0.002756	-0.001428	8	0.1865	5.4802	-33.24	-0.000696	
			2	BASE	6.1	215000	0.2	7.9	5.734	5	-11.2	-6	0.002756	-0.005464	12	0.2055	5.236	-9.95	-0.000174
			3	SUBBASE	36	24400	0.35	14	5.512	9.3	-2.7	-0.5	0.003683	-0.002997	18	0.1996	4.9177	3.72	0.000256
			4	ROADBED	20	21900	0.35	14	5.512	0	-2.7	-0.5	0.003683	-0.01084	24	0.1774	4.6348	10.31	0.000461
							50	3.816	-0.4	-0.8	0	0.000185	-0.002228	36	0.1096	4.2153	18.31	0.000568	
							50	3.816	-0.4	-0.8	0	0.000185	-0.002493	60	0.0174	3.9107	13.12	0.000436	
							0	4.285	-107.2	-79.6	0	-0.003066	-0.001782	0	0	4.285	-105.12	-0.003066	
							9.4	4.118	67.8	-9.3	-4.1	0.002292	-0.001247	8	0.1699	3.9387	-22.8	-0.000517	
		1	AC	6.2	249400	0.2	9.4	4.118	5.1	-9.3	-4.1	0.002292	-0.004223	12	0.1844	3.7345	-6.77	-0.000145	
			2	BASE	36	24900	0.45	15.6	3.945	8.8	-2.2	-0.5	0.002982	-0.002295	18	0.1815	3.4863	1.16	0.000176
			3	SUBBASE	36	24900	0.45	15.6	3.945	-0.4	-2.2	-0.5	0.002982	-0.007306	24	0.1644	3.263	6.85	0.000377
			4	ROADBED	20	24900	0.45	51.6	2.925	-0.6	-0.8	0	8.5E-05	-0.000924	36	0.1061	2.9231	13.71	0.000513
							51.6	2.925	-0.6	-0.8	0	8.5E-05	-0.000955	60	0.0172	2.67	10.92	0.000428	

Mechanistic responses - North Atlantic Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULUS		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		RAD. DIST. (in)	DISPL	DEFLECTI (mil)	RADIAL STRESS	RADIAL STRAIN
									RADIAL	VERT		RADIAL	VERT					
545007	3	1	AC	8.4	3306400	0.15	0	10.45	-141.7	-79.6	0	-0.003202	-0.001021	0	0	10.45	-140.06	-0.003202
		2	BASE	6	106000	0.2	8.4	10.34	113.1	-5.8	-6.5	0.002868	-0.001253	8	0.1846	10.0984	-40.13	-0.000794
		3	ROADBED	45.6	10200	0.35	8.4	10.34	2.7	-5.8	-6.5	0.002868	-0.005452	12	0.2082	9.8595	-16.31	-0.000307
							14.4	10.11	4.7	-1.5	-0.3	0.003803	-0.003232	18	0.2095	9.5365	0.74	0.000167
871622	4						14.4	10.11	-0.2	-1.5	-0.3	0.003803	-0.01346	24	0.1905	9.2383	10.63	0.000437
														36	0.1213	8.7819	21.95	0.000606
														60	0.0196	8.4413	16.57	0.000491
		1	AC	5.6	687400	0.35	0	14.22	-191.7	-79.6	0	-0.01455	0.007935	0	0	14.22	-229.97	-0.01455
		2	BASE	5	36200	0.35	5.6	13.91	146.7	-20.5	-7.4	0.01538	-0.01741	8	0.7583	12.106	-59.46	-0.00243
		3	SUBBASE	30.7	25800	0.35	5.6	13.91	-1	-20.5	-7.4	0.01538	-0.04711	12	0.7925	10.735	-7.02	0.001097
		4	ROADBED	20	12500	0.35	10.6	12.06	1.6	-9.8	-0.5	0.01216	-0.0299	18	0.6461	9.1271	14.04	0.002713
							10.6	12.06	-0.3	-9.8	-0.5	0.01216	-0.03672	24	0.493	7.9459	12.86	0.002396
							41.3	7.517	0.4	-1.3	0	0.002668	-0.006036	36	0.2361	6.5347	14.39	0.001649
							41.3	7.517	-0.2	-1.3	0	0.002668	-0.00947	60	0.0322	5.735	7.02	0.000821

Mechanistic responses - West Region.

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)				MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)		STRESS (psi)		SHR		STRAIN		RAD. DIST. (in)	RADIAL DEFLECT (mil)		STRESS		RADIAL DISPL (in)	STRESS		RADIAL STRAIN
							RADIAL	VERT	RADIAL	VERT	RADIAL	VERT	RADIAL	VERT		DISPL	DEFLECT	DISPL	DEFLECT		DISPL	DEFLECT	STRAIN
21002		1	AC	3.5	473500	0.35	0	13.28	-212.5	-79.6	0	-0.02401	0.01569	0	0	13.28	-267.24	-0.02401	0	0	13.28	-267.24	-0.02401
		2	BASE	6	40300	0.35	3.5	12.99	147.3	-45.4	-14.3	0.02343	-0.03193	8	1.0066	9.0673	-25.95	0.001891	8	1.0066	9.0673	-25.95	0.001891
		3	SUBBASE	7	48500	0.35	3.5	12.99	-8.1	-45.4	-14.3	0.02343	-0.08961	12	0.8529	6.7405	29.15	0.005887	12	0.8529	6.7405	29.15	0.005887
		4	ROADBED	43.5	30400	0.35	9.5	8.975	-2.2	-20	-0.9	0.01381	-0.04589	18	0.4996	4.7843	23.25	0.004409	18	0.4996	4.7843	23.25	0.004409
47613		1	AC	13	2773300	0.15	16.5	6.9	2.8	-8.9	-0.4	0.01014	-0.02247	36	0.1519	2.7222	5.94	0.001044	36	0.1519	2.7222	5.94	0.001044
		2	BASE	36	86400	0.45	13	2.795	45	-3.7	-3.6	0.00137	-0.00641	60	0.0224	2.206	3.31	0.000567	60	0.0224	2.206	3.31	0.000567
		3	ROADBED	20	30300	0.45	13	2.795	-0.7	-3.7	-3.6	0.00137	-0.003371	0	0.1071	2.7376	-10.85	-0.00136	0	0.1071	2.7376	-10.85	-0.00136
		4	ROADBED	20	21100	0.35	49	2.33	-0.3	-0.7	0	0.000193	-0.000537	12	0.1103	2.817	-1.21	-1E-06	12	0.1103	2.817	-1.21	-1E-06
47614		1	AC	9.8	5135900	0.15	50.9	3.832	-0.4	-0.7	0	4.6E-05	-0.001258	24	0.0883	4.3083	7.06	0.000191	24	0.0883	4.3083	7.06	0.000191
		2	BASE	5.1	334600	0.2	50.9	3.832	-0.4	-0.7	0	4.6E-05	-0.002117	36	0.0576	4.1234	15.16	0.000275	36	0.0576	4.1234	15.16	0.000275
		3	SUBBASE	36	35900	0.35	9.8	4.752	76.1	-6.2	-3.4	0.001237	-0.000599	60	0.0104	2.0978	7.33	0.00026	60	0.0104	2.0978	7.33	0.00026
		4	ROADBED	20	21100	0.35	14.9	4.675	6.3	-1.9	-0.4	0.001614	-0.0005091	0	0	4.834	-108.82	-0.001549	0	0	4.834	-108.82	-0.001549
47614		1	AC	9.6	3641100	0.15	0	4.966	-113.9	-79.6	0	-0.002251	-0.001162	8	0.0872	4.6613	-26.34	-0.000308	8	0.0872	4.6613	-26.34	-0.000308
		2	BASE	5.3	208500	0.2	9.6	4.853	79.9	-6.3	-3.7	0.001834	-0.000877	12	0.1401	4.5638	-9.79	-0.000455	12	0.1401	4.5638	-9.79	-0.000455
		3	SUBBASE	36	25700	0.35	9.6	4.853	3.5	-6.3	-3.7	0.001834	-0.003257	18	0.1401	4.3704	0.36	0.000111	18	0.1401	4.3704	0.36	0.000111
		4	ROADBED	20	23700	0.35	14.9	4.728	5.7	-2	-0.3	0.002345	-0.007406	24	0.1278	4.1941	7.52	0.000285	24	0.1278	4.1941	7.52	0.000285
63005		1	AC	7.9	978200	0.15	50.9	3.475	-0.4	-0.8	0	4.2E-05	-0.001851	36	0.0827	3.9235	15.67	0.0004	36	0.0827	3.9235	15.67	0.0004
		2	BASE	3.9	789800	0.2	50.9	3.475	-0.4	-0.8	0	4.2E-05	-0.002021	60	0.0134	3.72	12.44	0.000335	60	0.0134	3.72	12.44	0.000335
		3	SUBBASE	36	16500	0.35	7.9	9.191	24.5	-20.9	-5.8	0.002398	-0.00487	0	0	9.589	-94.58	-0.006911	0	0	9.589	-94.58	-0.006911
		4	ROADBED	20	13500	0.35	11.8	9.075	55.4	-3.2	-4.4	0.005663	-0.01809	8	0.3782	8.7974	-18.43	-0.000987	8	0.3782	8.7974	-18.43	-0.000987
63005		1	AC	7.9	978200	0.15	11.8	9.075	-0.2	-3.2	-4.4	0.005663	-0.01809	12	0.4053	8.3575	-4.96	-0.000263	12	0.4053	8.3575	-4.96	-0.000263
		2	BASE	3.9	789800	0.2	11.8	9.075	-0.2	-3.2	-4.4	0.005663	-0.01809	18	0.3996	7.8528	0.56	0.000354	18	0.3996	7.8528	0.56	0.000354
		3	SUBBASE	36	16500	0.35	11.8	9.075	-0.2	-3.2	-4.4	0.005663	-0.01809	24	0.3636	7.3977	5.72	0.000813	24	0.3636	7.3977	5.72	0.000813
		4	ROADBED	20	13500	0.35	47.8	6.25	-0.3	-0.9	0	0.000474	-0.003676	36	0.2364	6.7068	11.75	0.00113	36	0.2364	6.7068	11.75	0.00113
63005		1	AC	7.9	978200	0.15	47.8	6.25	-0.4	-0.9	0	0.000474	-0.004427	60	0.038	6.191	9.5	0.000952	60	0.038	6.191	9.5	0.000952
		2	BASE	3.9	789800	0.2	47.8	6.25	-0.4	-0.9	0	0.000474	-0.004427	0	0	9.589	-94.58	-0.006911	0	0	9.589	-94.58	-0.006911
		3	SUBBASE	36	16500	0.35	47.8	6.25	-0.4	-0.9	0	0.000474	-0.004427	8	0.3782	8.7974	-18.43	-0.000987	8	0.3782	8.7974	-18.43	-0.000987
		4	ROADBED	20	13500	0.35	47.8	6.25	-0.4	-0.9	0	0.000474	-0.004427	12	0.4053	8.3575	-4.96	-0.000263	12	0.4053	8.3575	-4.96	-0.000263

Mechanistic responses - West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU		DEF (mil)	STRESS (psi)			STRAIN			RAD. DISPL (in)	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN			
					POIS				RADIAL	VERT	SHR	RADIAL	VERT					VERT		
63017	4	1	AC	8.4	2527200	0.15	0	4.576	-96.9	-79.6	0	-0.002712	-0.001905	0	4.576	-95.66	-0.002712			
		2	BASE	3	3001000	0.2	8.4	4.418	23.1	-16.2	-7.2	0.00085	-0.000934	8	4.2717	-19.24	-0.000413			
		3	SUBBASE	5.8	25800	0.35	8.4	4.418	28.5	-16.2	-7.2	0.00085	-0.000931	12	4.1027	-6.76	-0.000161			
		4	ROADBED	42.8	26300	0.35	11.4	4.391	76.1	-2.6	-4.4	0.002043	-0.001114	18	3.905	-0.75	9.5E-05			
63030							11.4	4.391	-0.4	-2.6	-4.4	0.002043	-0.007634	24	3.7233	5.36	0.000306			
							17.2	4.024	-0.4	-1.7	0	0.001194	-0.005256	36	3.4419	12.49	0.000467			
							17.2	4.024	-0.4	-1.7	0	0.001194	-0.005199	60	3.2268	10.6	0.000412			
							0	3.036	-106.7	-79.6	0	-0.002204	-0.001291	0	3.036	-105.28	-0.002204			
67452							8.4	2.923	51.8	-14.3	-4.5	0.001295	-0.000885	8	2.7858	-21.83	-0.000347			
							8.4	2.923	20.5	-14.3	-4.5	0.001295	-0.001858	12	2.6392	-6.36	-9.4E-05			
							10.7	2.882	34	-6.2	-1.8	0.001795	-0.001882	18	2.4602	1.44	0.000132			
							10.7	2.882	7.5	-6.2	-1.8	0.001795	-0.002244	24	2.3001	6.92	0.000272			
67455							14	2.82	10.8	-2.7	-0.6	0.002277	-0.001773	36	2.0575	13.64	0.000366			
							14	2.82	0.2	-2.7	-0.6	0.002277	-0.006426	60	1.878	10.7	0.000302			
							0	5.007	-51.8	-79.6	0	-0.003897	-0.01333	0	5.007	-57.99	-0.003897			
							3.8	4.495	-38.3	-71.1	-9.6	-0.001956	-0.01363	8	4.169	-13.24	-0.001496			
69049							3.8	4.495	-107	-71.1	-9.6	-0.001956	-0.000766	12	3.833	-5.78	-0.001105			
							10.8	4.418	132.6	-3.6	-9	0.002961	-0.001692	18	3.561	-2.75	-5.7E-05			
							10.8	4.418	-0.8	-3.6	-9	0.002961	-0.01779	24	3.333	1.29	0.00068			
							21.4	2.837	-0.8	-1.7	0	0.000644	-0.01117	36	2.6771	4.24	0.001041			
69049							21.4	2.837	-1	-1.7	0	0.000644	-0.002379	60	2.2955	3.6	0.00085			
							0	5.63	-92.6	-79.6	0	-0.003672	-0.002801	0	5.63	-90.96	-0.003672			
							8.9	5.388	36.7	-16.4	-3.9	0.001851	-0.001614	8	5.1987	-14.59	-0.000368			
							8.9	5.388	12	-16.4	-3.9	0.001851	-0.003022	12	4.967	-2.33	-2.9E-05			
69049							13.6	5.285	26.2	-3.5	-1.7	0.003117	-0.002067	18	4.7117	1.58	0.000233			
							13.6	5.285	0.2	-3.5	-1.7	0.003117	-0.008797	24	4.4871	5.38	0.000422			
							48.9	4.089	-0.2	-0.7	0	0.000354	-0.001476	36	4.1501	10.36	0.000556			
							48.9	4.089	-0.5	-0.7	0	0.000354	-0.001697	60	3.9015	8.29	0.000463			
69049							0	4.352	-72.4	-79.6	0	-0.002794	-0.003272	0	4.352	-70.74	-0.002794			
							15	4.018	24.5	-4.1	-1.1	0.001238	-0.000681	8	3.9987	-5.36	3E-05			
							15	4.018	7.6	-4.1	-1.1	0.001238	-0.001262	12	3.8405	1.44	0.0001			
							18.4	3.98	11.7	-1.6	-0.6	0.001737	-0.001139	18	3.7076	-0.34	9.6E-05			
69049							18.4	3.98	-0.1	-1.6	-0.6	0.001737	-0.00531	24	3.5877	2.1	0.000218			
							32.1	3.508	-0.3	-0.9	0	0.000478	-0.002399	36	3.4015	6.44	0.000371			
							32.1	3.508	-0.5	-0.9	0	0.000478	-0.001889	60	3.2563	6.36	0.000368			

Mechanistic responses - West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	DEPTH (in)	DEF (mil)	STRESS (psi)			STRAIN			RAD. DIST. (in)	RADIAL RESPONSE			RADIAL STRAIN
									RADIAL	VERT	SHR	RADIAL	VERT	VERT		DISPL	DEFLECTI (mil)	STRESS	
412002	4	1	AC	3.8	416300	0.3	0	10.29	-94.8	-79.6	0	-0.01095	-0.005976	0	0	0.6107	8.7496	-106.21	-0.01095
		2	BASE	8.4	413400	0.2	3.8	9.939	-21.8	-62	-7	0.000153	-0.01261	8	8	0.6107	8.7496	-25.3	-0.002359
		3	SUBBASE	36	13600	0.45	3.8	9.939	-15.9	-62	-7	0.000153	-0.01359	12	12	0.6777	7.9492	-8.34	-0.000807
		4	ROADBED	20	13900	0.45	12.2	9.268	50.7	-4.5	-3.7	0.009736	-0.006276	18	18	0.6777	7.9492	-3.02	0.00049
415005							12.2	9.268	-0.9	-4.5	-3.7	0.009736	-0.02419	24	24	0.6211	6.3417	2.63	0.00137
							48.2	5.634	-0.5	-1	0	0.001044	-0.003552	36	36	0.4053	5.2043	8.51	0.001918
							48.2	5.634	-0.5	-1	0	0.001044	-0.003607	60	60	0.0644	4.3633	7.52	0.001616
	4	1	AC	11.5	7554500	0.15	0	3.816	-99.4	-79.6	0	-0.000928	-0.000623	0	0	0	3.816	-97.54	-0.000928
415005		2	BASE	6	267800	0.2	11.5	3.754	64.8	-3.1	-2.7	0.000717	-0.000314	8	8	0.0519	3.7124	-21.81	-0.000166
		3	SUBBASE	30.3	10000	0.35	11.5	3.754	1.8	-3.1	-2.7	0.000717	-0.001206	12	12	0.057	3.654	-8.52	-7.3E-05
		4	ROADBED	20	34600	0.45	17.5	3.701	3	-0.9	-0.1	0.000946	-0.0008	18	18	0.0583	3.5835	-2.02	2E-05
							17.5	3.701	-0.4	-0.9	-0.1	0.000946	-0.006899	24	24	0.0546	3.5175	4.91	9.9E-05
415005							47.8	2.117	-0.4	-0.7	0	0.000238	-0.00435	36	36	0.0371	3.414	13.25	0.000166
							47.8	2.117	-0.8	-0.7	0	-0.000238	-0.000177	60	60	0.0062	3.3333	11.87	0.000154
	4	1	AC	11.5	8210401	0.15	0	4.737	-95	-79.6	0	-0.000809	-0.00059	0	0	0	4.737	-83.14	-0.000809
		2	BASE	6.3	674600	0.2	11.5	4.68	55.9	-4.8	-2.7	0.000572	-0.000274	8	8	0.0447	4.6465	-19.12	-0.000127
533011		3	SUBBASE	23	6700	0.35	11.5	4.68	3.8	-4.8	-2.7	0.000572	-0.00085	12	12	0.0486	4.596	-6.88	-5.3E-05
		4	ROADBED	20	24500	0.45	17.8	4.644	6.5	-0.9	-0.3	0.000793	-0.000521	18	18	0.0494	4.5375	-1.84	1.7E-05
							17.8	4.644	-0.4	-0.9	-0.3	0.000793	-0.008723	24	24	0.0463	4.4832	4.27	8.2E-05
							40.8	2.98	-0.4	-0.7	0	-0.000364	-0.006368	36	36	0.0319	4.3967	12.04	0.00014
533011							40.8	2.98	-0.8	-0.7	0	-0.000364	-0.000191	60	60	0.0053	4.3285	11.15	0.000133
	4	1	AC	10	1643200	0.15	0	9.012	-114.9	-79.6	0	-0.005091	-0.002579	0	0	0	9.012	-113.61	-0.005091
		2	BASE	13.1	15100	0.35	10	8.758	87.5	-3.6	-6	0.00446	-0.001899	8	8	0.2884	8.4518	-27.73	-0.001025
		3	SUBBASE	36	14600	0.35	10	8.758	-0.4	-3.6	-6	0.00446	-0.0161	12	12	0.3188	8.1082	-10.41	-0.000385
533812		4	ROADBED	20	15200	0.35	23.1	7.29	-0.4	-1.5	0	0.001878	-0.008148	18	18	0.3195	7.6688	0.48	0.000256
							23.1	7.29	-0.4	-1.5	0	0.001878	-0.008388	24	24	0.2906	7.2659	8.02	0.000662
							59.1	5.437	-0.4	-0.8	0	-3E-06	-0.003229	36	36	0.1863	6.6533	16.26	0.000917
							59.1	5.437	-0.4	-0.8	0	-3E-06	-0.003089	60	60	0.0299	6.197	12.53	0.000748
533812	4	1	AC	8.7	4665000	0.15	0	7.446	-145.6	-79.6	0	-0.002336	-0.000696	0	0	0	7.446	-143.79	-0.002336
		2	BASE	3.4	12100	0.35	8.7	7.368	123.5	-2.6	-3.8	0.002207	-0.000898	8	8	0.1359	7.1923	-43.5	-0.000622
		3	SUBBASE	4.2	19600	0.35	8.7	7.368	-0.5	-2.6	-3.8	0.002207	-0.01146	12	12	0.1548	7.0205	-18.74	-0.000258
		4	ROADBED	43.7	14800	0.35	12.1	7.017	-0.6	-1.5	0	0.001272	-0.009188	18	18	0.157	6.7784	-0.03	0.00011
							12.1	7.017	-0.4	-1.5	0	0.001272	-0.00621	24	24	0.1434	6.5551	11.19	0.000325
							16.3	6.775	-0.3	-1.3	0	0.001179	-0.005407	36	36	0.0912	6.2125	23.36	0.000457
							16.3	6.775	-0.4	-1.3	0	0.001179	-0.006737	60	60	0.0147	5.9555	17.56	0.000369

Mechanistic responses - West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)				MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)	STRESS (psi)		STRAIN		RAD. DISPL (in)	DEFLECT (mil)	STRESS	STRAIN	RAD. DISPL (in)	DEFLECT (mil)	STRESS	STRAIN		
								RADIAL	VERT	SHR	RADIAL									VERT	
536049	4	1	AC	10.4	1528100	0.3	0	6.861	-120.7	-79.6	0	-0.003864	-0.00256	0	0	0	6.861	-126.67	-0.003864		
		2	BASE	3.8	42500	0.35	10.4	6.599	79.4	-5.3	-2	0.003671	-0.003592	8	0.2211	6.3544	-35.41	-0.001009			
		3	SUBBASE	15.5	42900	0.35	10.4	6.599	0	-5.3	-2	0.003671	-0.01062	12	0.2507	6.0623	-14.19	-0.000386			
		4	ROADBED	30.3	14300	0.45	14.2	6.264	-0.1	-3.2	-0.1	0.002507	-0.007344	18	0.2534	5.7133	-4.12	0.000177			
							14.2	6.264	0	-3.2	-0.1	0.002507	-0.007338	24	0.2317	5.398	3.56	0.000507			
							29.7	5.55	0.5	-1.1	0	0.001696	-0.003476	36	0.1514	4.9228	11.75	0.000715			
							29.7	5.55	-0.5	-1.1	0	0.001696	-0.004887	60	0.0244	4.5688	10.46	0.000611			
562017	4	1	AC	2.9	947200	0.3	0	4.481	-83.5	-79.6	0	-0.003827	-0.003198	0	0	4.481	-90.19	-0.003827			
		2	BASE	10.4	1290200	0.2	2.9	4.36	-40.8	-70.9	-5.8	-0.000892	-0.005177	8	0.2207	3.9379	-20.13	-0.000846			
		3	SUBBASE	36	23400	0.45	2.9	4.36	-34.4	-70.9	-5.8	-0.000892	-0.004478	12	0.2473	3.6728	-7.71	-0.000412			
		4	ROADBED	20	26800	0.45	13.3	4.087	51.2	-3.2	-3.2	0.00307	-0.001971	18	0.2562	3.4013	-3.78	6.5E-05			
							13.3	4.087	-0.8	-3.2	-3.2	0.00307	-0.008002	24	0.24	3.1463	1.41	0.00044			
							49.3	2.808	-0.6	-0.9	0	0.000223	-0.001313	36	0.1634	2.7506	7.15	0.000726			
							49.3	2.808	-0.6	-0.9	0	0.000223	-0.001218	60	0.0267	2.4458	7.01	0.000669			
562019	4	1	AC	4.5	3007000	0.3	0	3.588	-163.2	-79.6	0	-0.003063	0.000646	0	0	3.588	-179.59	-0.003063			
		2	BASE	11.3	468400	0.2	4.5	3.53	77	-40.6	-13.5	0.00226	-0.002789	8	0.1502	3.1476	-30.76	-0.000207			
		3	SUBBASE	23.6	56700	0.35	4.5	3.53	3.5	-40.6	-13.5	0.00226	-0.008612	12	0.1493	2.8898	2.65	0.000287			
		4	ROADBED	20.6	39400	0.35	15.8	3.078	15	-4.1	-0.7	0.002649	-0.002127	18	0.1252	2.6204	6.77	0.000376			
							15.8	3.078	0.3	-4.1	-0.7	0.002649	-0.007173	24	0.1054	2.4181	4.75	0.000324			
							39.4	2.262	-0.1	-1.1	0	0.000518	-0.001748	36	0.0647	2.1443	11	0.000331			
							39.4	2.262	-0.3	-1.1	0	0.000518	-0.002277	60	0.0104	1.956	8.8	0.00026			
811803	4	1	AC	4.1	1898600	0.3	0	12.51	-368.6	-79.6	0	-0.01265	0.007537	0	0	12.51	-416.7	-0.01265			
		2	BASE	11.2	14800	0.35	4.1	12.42	346.3	-17.5	-39.5	0.01327	-0.01161	8	0.637	10.5332	-96.25	-0.001485			
		3	SUBBASE	36	49400	0.35	4.1	12.42	-3.4	-17.5	-39.5	0.01327	-0.06436	12	0.6451	9.1313	1.72	0.001441			
		4	ROADBED	20	17500	0.35	15.3	7.047	-2.9	-6.5	-0.1	0.002654	-0.03009	18	0.4907	7.3899	48.57	0.002721			
							15.3	7.047	-1.5	-6.5	-0.1	0.002654	-0.01104	24	0.3496	6.1473	31.02	0.00212			
							51.3	5.068	0.4	-1.1	0	0.001215	-0.002721	36	0.1322	4.7721	31.36	0.001274			
							51.3	5.068	-0.2	-1.1	0	0.001215	-0.005089	60	0.0154	4.1335	8.85	0.0004			
811804	4	1	AC	3.4	1086200	0.3	0	22.56	-433.7	-79.6	0	-0.02604	0.01746	0	0	22.56	-502.98	-0.02604			
		2	BASE	14	12300	0.35	3.4	22.44	400	-28.3	-49.3	0.02649	-0.0246	8	1.2403	18.0338	-97.15	-0.001529			
		3	SUBBASE	8.5	42500	0.35	3.4	22.44	-4.7	-28.3	-49.3	0.02649	-0.1184	12	1.2	14.9175	21.01	0.004185			
		4	ROADBED	34.1	10900	0.45	17.4	11.94	-2.7	-6.2	-0.2	0.003367	-0.03482	18	0.844	11.2992	61.43	0.005608			
							17.4	11.94	-1.2	-6.2	-0.2	0.003367	-0.01273	24	0.5825	8.8783	28.33	0.003669			
							25.9	10.87	4.1	-3.1	-0.2	0.008712	-0.01405	36	0.2256	6.2835	29.46	0.002079			
							25.9	10.87	-0.8	-3.1	-0.2	0.008712	-0.02177	60	0.0294	5.071	9.7	0.000752			

Mechanistic responses - West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)				MECHANISTIC RESPONSES UNDER THE LOAD				MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)	STRESS (psi)	SHR	RADIAL	VERT	STRAIN	DISPL (in)	RADIAL	DEFLECT (mil)	STRESS	RADIAL
821005	4	1	AC	4	2060700	0.3	0	11.68	-372.1	-79.6	0	-0.01177	0	0.007069	0	11.68	-420.26
		2	BASE	10.7	24300	0.35	4	11.61	341.5	-19.7	-40	0.01209	8	-0.01068	8	9.8354	-96.99
		3	SUBBASE	12.3	31700	0.35	4	11.61	-3.2	-19.7	-40	0.01209	12	-0.04956	12	8.522	-0.79
		4	ROADBED	33	20000	0.35	14.7	7.912	-1.1	-6.2	-0.2	0.005912	18	-0.02215	18	6.8836	43.35
821005							14.7	7.912	-0.4	-6.2	-0.2	0.005912	24	-0.01849	24	5.6872	27.38
							27	6.275	0.6	-2.8	-0.1	0.004285	36	-0.01009	36	4.286	32.32
							27	6.275	-0.2	-2.8	-0.1	0.004285	60	-0.0133	60	3.547	12.31
							0	13.28	-397.7	-79.6	0	-0.01494	0	0.009675	0	13.28	-460.15
821005	4	1	AC	3.6	172200	0.3	0	13.28	366.8	-25.4	-34.8	0.01532	8	-0.01423	8	10.7695	-93.3
		2	BASE	8	19000	0.35	3.6	13.2	-4.7	-25.4	-34.8	0.01532	12	-0.07206	12	9.0303	16.11
		3	SUBBASE	12	42100	0.35	3.6	13.2	-3.6	-9.5	-0.2	0.005311	18	-0.0365	18	7.0033	54.41
		4	ROADBED	36.4	20400	0.35	11.6	8.769	-1.7	-9.5	-0.2	0.005311	24	-0.01968	24	5.6327	27.02
826006							23.6	8.769	1.8	-3.8	-0.1	0.005846	36	-0.01198	36	4.1453	27.67
							23.6	7.004	-0.1	-3.8	-0.1	0.005846	60	-0.0178	60	0.0183	9.54
							0	16.77	-262.3	-79.6	0	-0.01332	0	0.006204	0	16.77	-295.95
							5.2	16.6	239.9	-13.7	-17.5	0.01425	8	-0.01231	8	14.9011	-82.78
826006	4	1	AC	5.2	1233000	0.3	5.2	16.6	-2.8	-13.7	-17.5	0.01425	12	-0.07098	12	13.5725	-13.44
		2	BASE	8	10500	0.35	5.2	16.6	-2.9	-6.3	-0.1	0.003237	18	-0.04051	18	11.8558	24.37
		3	SUBBASE	40	33900	0.35	13.2	12.04	-1.7	-6.3	-0.1	0.003237	24	-0.01491	24	10.5517	23.44
		4	ROADBED	20	9200	0.35	53.2	9.178	0.4	-0.9	0	0.001493	36	-0.003343	36	8.9606	26.19
826006							53.2	9.178	-0.3	-0.9	0	0.001493	60	-0.007599	60	0.0271	9.94
							0	16.77	-262.3	-79.6	0	-0.01332	0	0.006204	0	16.77	-295.95
							5.2	16.6	239.9	-13.7	-17.5	0.01425	8	-0.01231	8	14.9011	-82.78
							5.2	16.6	-2.8	-13.7	-17.5	0.01425	12	-0.07098	12	13.5725	-13.44
826006							13.2	12.04	-2.9	-6.3	-0.1	0.003237	18	-0.04051	18	11.8558	24.37
							13.2	12.04	-1.7	-6.3	-0.1	0.003237	24	-0.01491	24	10.5517	23.44
							53.2	9.178	0.4	-0.9	0	0.001493	36	-0.003343	36	8.9606	26.19
							53.2	9.178	-0.3	-0.9	0	0.001493	60	-0.007599	60	0.0271	9.94

Mechanistic responses - South West Region.

SHRP ID	NO. LAY	LAYER INFORMATION			DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD								MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK		MODULU	POIS	DEF (mil)		STRESS (psi)		STRAIN		DIST. (in)	RADIAL DEFLECT (mil)		RADIAL STRESS	RADIAL STRAIN
								RADIAL	VERT	SHR	RADIAL	VERT	RADIAL		VERT			
11001	3	1	AC	3.6	750500	0.31	0	11.84	-239.2	-79.6	0	-0.01909	0.009645	0	0	11.84	-278.59	-0.01909
		2	BASE	6.4	596000	0.35	3.6	11.66	171.1	-40.8	-17.4	0.01724	-0.01978	8	0.8625	8.7003	-38.03	0.000144
		3	ROADBED	50	269000	0.45	3.6	11.66	-4.3	-40.8	-17.4	0.01724	-0.0574	12	0.791	6.8008	21.41	0.003662
							10	8.976	8.2	-13.5	-1.2	0.01657	-0.03219	18	0.5354	4.8965	26.87	0.003628
							10	8.976	-2.4	-13.5	-1.2	0.01657	-0.04088	24	0.3729	3.6935	11.32	0.002216
														36	0.1636	2.4028	11.64	0.001267
														60	0.0223	1.7345	5.02	0.000567
11019	3	1	AC	6.7	709200	0.32	0	10.62	-165.4	-79.6	0	-0.01197	0.004604	0	0	10.62	-178.26	-0.01197
		2	BASE	5.9	518000	0.35	6.7	10.25	118.6	-17	-6.8	0.01192	-0.01357	8	0.6504	9.0023	-47.42	-0.002436
		3	ROADBED	47.4	20000	0.35	6.7	10.25	1.5	-17	-6.8	0.01192	-0.03091	12	0.7023	7.9685	-10.49	0.000158
							12.6	8.881	5.4	-6.4	-0.5	0.01095	-0.01957	18	0.6239	6.7162	6.46	0.001752
							12.6	8.881	0.2	-6.4	-0.5	0.01095	-0.03155	24	0.5109	5.7171	9.75	0.001948
														36	0.2758	4.4048	14.1	0.001685
														60	0.0398	3.571	8.3	0.001007
14126	4	1	AC	13.6	861200	0.3	0	5.293	-92.4	-79.6	0	-0.004531	-0.002481	0	0	5.293	-96.46	-0.004531
		2	BASE	18.2	300000	0.35	13.6	4.723	44.1	-4.6	-2.1	0.00366	-0.003652	8	0.2424	4.5971	-18.78	-0.000684
		3	SUBBASE	36	887000	0.35	13.6	4.723	-0.4	-4.6	-2.1	0.00366	-0.01228	12	0.2602	4.2645	-4.2	-0.000155
		4	ROADBED	20	272000	0.35	31.8	3.332	-0.9	-1.9	0	0.000396	-0.004359	18	0.2563	3.9544	-2.12	0.000211
							31.8	3.332	-0.5	-1.9	0	0.000396	-0.001771	24	0.234	3.6818	1.97	0.000517
							67.8	2.957	-0.2	-0.7	0	0.000138	-0.000656	36	0.1528	3.2819	6.6	0.000723
							67.8	2.957	-0.3	-0.7	0	0.000138	-0.001757	60	0.024	2.9905	5.8	0.000604
15008	4	1	AC	9.2	3967300	0.15	0	4.908	-104.1	-79.6	0	-0.001866	-0.001147	0	0	4.908	-102.21	-0.001866
		2	BASE	5.9	682600	0.3	9.2	4.803	58.3	-11.5	-4	0.001252	-0.000762	8	0.103	4.6962	-21.29	-0.000296
		3	SUBBASE	8.1	496000	0.35	9.2	4.803	7.6	-11.5	-4	0.001252	-0.002266	12	0.1113	4.5742	-6.31	-8.6E-05
		4	ROADBED	36.8	211000	0.35	15.1	4.703	15.9	-2.1	-0.5	0.001712	-0.001715	18	0.11	4.4281	0.53	9.3E-05
							15.1	4.703	0.3	-2.1	-0.5	0.001712	-0.004304	24	0.1006	4.2957	5.97	0.000215
							23.2	4.442	0.3	-1.1	0	0.001132	-0.002647	36	0.0663	4.0925	13.06	0.00031
							23.2	4.442	-0.2	-1.1	0	0.001132	-0.004597	60	0.0109	3.938	11.02	0.000272
16019	4	1	AC	11.8	5903000	0.34	0	7.599	-102.4	-79.6	0	-0.006575	-0.001136	0	0	7.599	-111.43	-0.006575
		2	BASE	4.6	167000	0.35	11.8	6.858	55.2	-6.6	-1.3	0.006407	-0.007757	8	0.3586	6.54	-25.17	-0.001428
		3	SUBBASE	36	537000	0.35	11.8	6.858	-1.5	-6.6	-1.3	0.006407	-0.02877	12	0.3951	6.0063	-5.92	-0.000282
		4	ROADBED	20	191000	0.35	16.4	5.748	-2.1	-4.6	0	0.001647	-0.01899	18	0.3807	5.4778	-1.23	0.000536
							16.4	5.748	-1.2	-4.6	0	0.001647	-0.00711	24	0.3344	5.0322	3.15	0.000946
							52.4	4.452	0.1	-0.9	0	0.000703	-0.001849	36	0.2027	4.4118	7.06	0.001063
							52.4	4.452	-0.3	-0.9	0	0.000703	-0.003709	60	0.0301	3.9907	5.27	0.000761

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.						
		NO.	TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)			DIST. (in)	RADIAL DEFLECT (mil)			RADIAL DISPL	DEFLECT (mil)	STRESS	RADIAL STRAIN
									RADIAL	VERT	SHR		STRAIN	RADIAL	VERT				
53058	4	1	AC	6.3	834300	0.35	0	9.587	-143.1	-79.6	0	-0.007667	0.003138	0	0	9.587	-159.57	-0.007667	
		2	BASE	7.5	164800	0.35	6.3	9.306	72	-27.5	-6.8	0.006686	-0.009631	8	0.4067	8.4627	-37.45	-0.001383	
		3	SUBBASE	36	28400	0.35	6.3	9.306	3.2	-27.5	-6.8	0.006686	-0.017	12	0.4342	7.8043	-6.62	0.000171	
		4	ROADBED	20	14800	0.35	13.8	8.442	16	-5.7	-0.9	0.007436	-0.01034	18	0.3874	7.0758	2.94	0.000972	
53071							13.8	8.442	0.4	-5.7	-0.9	0.007436	-0.0203	24	0.3258	6.5007	5.29	0.001077	
							49.8	5.753	-0.1	-0.9	0	0.000842	-0.002826	36	0.1908	5.7276	10.04	0.001036	
							49.8	5.753	-0.3	-0.9	0	0.000842	-0.004698	60	0.0291	5.2097	7.32	0.000733	
53074	4	1	AC	5.7	1488000	0.3	0	8.327	-124.4	-79.6	0	-0.004312	-0.000336	0	0	8.327	-136.12	-0.004312	
		2	BASE	10.8	393900	0.35	5.7	8.168	45.6	-36.4	-7.7	0.003011	-0.00403	8	0.2221	7.7158	-27.52	-0.000536	
		3	SUBBASE	36	29500	0.45	5.7	8.168	-0.6	-36.4	-7.7	0.003011	-0.008803	12	0.2306	7.3763	-2.63	0.000169	
		4	ROADBED	20	10600	0.45	16.5	7.625	20.1	-3	-0.8	0.003479	-0.004342	18	0.2076	7.0233	1.66	0.000417	
54021							16.5	7.625	-0.3	-3	-0.8	0.003479	-0.008308	24	0.1819	6.7425	3.14	0.000466	
							52.5	6.54	-0.4	-0.7	0	0.000284	-0.001057	36	0.1176	6.3459	8.84	0.000555	
							52.5	6.54	-0.5	-0.7	0	0.000284	-0.002123	60	0.0193	6.0577	8.07	0.000482	
54021	4	1	AC	10.2	1347400	0.15	0	8.008	-97.7	-79.6	0	-0.005126	-0.003546	0	0	8.008	-96.3	-0.005126	
		2	BASE	6.8	135100	0.2	10.2	7.677	57.8	-8.4	-3.7	0.00365	-0.001989	8	0.2808	7.4202	-17.96	-0.000682	
		3	SUBBASE	36	15000	0.45	10.2	7.677	4.3	-8.4	-3.7	0.00365	-0.007028	12	0.2996	7.0933	-4.8	-0.000176	
		4	ROADBED	20	12200	0.45	17	7.37	7.2	-2	-0.4	0.004488	-0.003596	18	0.2945	6.7139	0.79	0.000272	
123995							17	7.37	-0.4	-2	-0.4	0.004488	-0.011103	24	0.2679	6.3731	5.7	0.000593	
							53	5.859	-0.6	-0.7	0	7.5E-05	-0.001355	36	0.1751	5.8544	11.86	0.000829	
							53	5.859	-0.6	-0.7	0	7.5E-05	-0.001684	60	0.0285	5.4643	9.78	0.000712	
123995	4	1	AC	9.6	5953000	0.15	0	4.537	-127	-79.6	0	-0.001562	-0.000641	0	0	4.537	-124.73	-0.001562	
		2	BASE	4	21700	0.35	9.6	4.47	101.6	-2.6	-3.1	0.001417	-0.00059	8	0.0901	4.3682	-35.5	-0.000387	
		3	SUBBASE	4.3	21900	0.35	9.6	4.47	-0.4	-2.6	-3.1	0.001417	-0.006413	12	0.1018	4.259	-15.05	-0.000164	
		4	ROADBED	42.1	24400	0.35	13.6	4.24	-0.4	-1.4	0	0.000991	-0.00517	18	0.1038	4.1117	-0.97	6E-05	
123995							13.6	4.24	-0.4	-1.4	0	0.000991	-0.005137	24	0.0954	3.976	8.76	0.000204	
							17.9	4.04	-0.5	-1.2	0	0.000643	-0.004225	36	0.062	3.7647	19.32	0.0003	
							17.9	4.04	-0.4	-1.2	0	0.000643	-0.003862	60	0.0101	3.6045	15.32	0.000252	
123995	4	1	AC	5.1	728300	0.35	0	9.71	-168.5	-79.6	0	-0.01154	0.005412	0	0	9.71	-199.17	-0.01154	
		2	BASE	13.4	91000	0.35	5.1	9.458	97.9	-33.2	-11.2	0.01063	-0.01348	8	0.5794	7.9855	-42.71	-0.001379	
		3	SUBBASE	12	8800	0.35	5.1	9.458	-1.4	-33.2	-11.2	0.01063	-0.03234	12	0.5914	6.95	-1.62	0.000979	
		4	ROADBED	29.5	24500	0.35	18.5	7.211	12	-3.2	-0.3	0.009568	-0.01276	18	0.4908	5.8329	7.53	0.001665	
123995							18.5	7.211	-0.3	-3.2	-0.3	0.009568	-0.03185	24	0.4015	5.0071	5.75	0.001419	
							30.5	4.466	-0.8	-1.9	0	0.001594	-0.00515	36	0.2348	3.9363	10.79	0.001264	
							30.5	4.466	-0.4	-1.9	0	0.001594	-0.006541	60	0.0369	3.2258	8.2	0.000927	

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD										RAD. MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULU	POIS	DEF		STRESS (psi)		STRAIN		DIST (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	STRAIN			
							(in)	(mil)	RADIAL	VERT	SHR	RADIAL						VERT		
123997	4	1	AC	3.1	1215000	0.3	0	24.8	-480.3	-79.6	0	-0.02603	0.01813	0	0	24.8	-558.99	-0.02603		
	2	BASE	12.3	123000	0.35	3.1	24.7	446.1	-30.9	-58.4	0.02645	-0.02463	8	1.1911	20.0174	-88.38	-0.000413			
	3	SUBBASE	14	514000	0.35	3.1	24.7	-5.7	-30.9	-58.4	0.02645	-0.1275	12	1.1095	16.815	40.52	0.005029			
	4	ROADBED	30.6	9200	0.35	15.4	14.01	-4.1	-8.2	-0.2	0.002181	-0.04365	18	0.7224	13.2842	75.7	0.005797			
124057							15.4	14.01	-2.8	-8.2	-0.2	0.002181	-0.01229	24	0.4702	11.0808	27.14	0.003337		
							29.4	12.58	4.6	-2.3	-0.2	0.007347	-0.0109	36	0.1669	8.8659	26.54	0.00168		
							29.4	12.58	-0.2	-2.3	-0.2	0.007347	-0.02357	60	0.0214	7.9285	7.89	0.000547		
							0	2.967	-86.5	-79.6	0	-0.001455	-0.001255	0	0	2.967	-84.76	-0.001455		
124099	4	1	AC	13.2	4080100	0.15	13.2	2.843	50.7	-2.4	-2.3	0.001043	-0.00044	8	0.0786	2.7983	-14.05	-0.000157		
	2	BASE	7.8	41000	0.35	13.2	2.843	-0.3	-2.4	-2.3	0.001043	-0.003966	12	0.0831	2.7103	-3.81	-5.1E-05			
	3	SUBBASE	36	41000	0.35	13.2	2.843	-0.4	-1.3	0	0.000539	-0.002618	18	0.0832	2.618	-1.01	4.2E-05			
	4	ROADBED	20	40900	0.35	21	2.593	-0.4	-1.3	0	0.000539	-0.00263	24	0.0775	2.5328	3.84	0.000145			
124136							57	2.005	-0.4	-0.7	0	-3.2E-05	-0.001071	36	0.0527	2.3989	10.04	0.000235		
							57	2.005	-0.4	-0.7	0	-3.2E-05	-0.001066	60	0.0087	2.2953	9.02	0.000217		
							0	10.21	-182.2	-79.6	0	-0.02017	0.006085	0	0	10.21	-208.78	-0.02017		
							3.6	9.905	119.8	-48.1	-17.7	0.01833	-0.02286	8	0.8352	6.8487	-11.97	0.002199		
124138	4	2	BASE	10.6	56700	0.35	3.6	9.905	-8.3	-48.1	-17.7	0.01833	-0.06973	12	0.6987	5.0523	28.77	0.005135		
	3	SUBBASE	10	59300	0.35	14.2	5.54	0.4	-12.4	-0.5	0.007702	-0.02235	18	0.3938	3.6152	19.77	0.003596			
	4	ROADBED	35.8	38100	0.35	14.2	5.54	0.4	-12.4	-0.5	0.007702	-0.02131	24	0.2562	2.8658	4.77	0.001644			
								24.2	4.111	1.6	-4.9	-0.2	0.004598	-0.01008	36	0.1233	2.1573	4.6	0.000805	
24.2								4.111	0.2	-4.9	-0.2	0.004598	-0.01297	60	0.0188	1.7893	2.84	0.000475		
0								12.7	-358.8	-79.6	0	-0.01776	0.01115	0	0	12.7	-416.32	-0.01776		
2.7								12.62	279.2	-49.2	-48.4	0.01611	-0.01686	8	0.7351	9.3275	-30.11	0.001461		
	4	2	BASE	9.3	54400	0.35	2.7	12.62	-9.4	-49.2	-48.4	0.01611	-0.06487	12	0.6281	7.339	48.9	0.004004		
	3	SUBBASE	11.5	31300	0.35	12	8.619	5.8	-11.9	-0.7	0.01409	-0.02947	18	0.3832	5.4808	43.28	0.003151			
	4	ROADBED	36.5	25500	0.35	12	8.619	0.5	-11.9	-0.7	0.01409	-0.03877	24	0.2612	4.4035	9.21	0.001541			
								23.5	5.844	0.6	-4.3	-0.1	0.006046	-0.01507	36	0.1209	3.2796	14.06	0.000891	
23.5								5.844	0.1	-4.3	-0.1	0.006046	-0.01717	60	0.0176	2.7048	6.67	0.000446		
0								5.114	-141.7	-79.6	0	-0.001993	-0.000635	0	0	5.114	-140.43	-0.001993		
8								4.8	454600	0.2	8	5.048	105	-8.5	-6.3	0.001664	-0.000779	8	0.1147	4.8945
	4	2	BASE	4.8	454600	0.2	8	5.048	7.6	-8.5	-6.3	0.001664	-0.002359	12	0.129	4.7468	-16	-0.000186		
	3	SUBBASE	36	14700	0.35	12.8	4.966	14.2	-1.6	-0.8	0.00255	-0.00162	18	0.1297	4.5441	0.7	0.000103			
	4	ROADBED	20	26700	0.35	12.8	4.966	-0.2	-1.6	-0.8	0.00255	-0.009443	24	0.1181	4.3569	10.43	0.000268			
								48.8	3.13	-0.4	-0.8	0	-0.000104	-0.003151	36	0.0754	4.0702	21.9	0.000375	
48.8								3.13	-0.5	-0.8	0	-0.000104	-0.001695	60	0.0122	3.8558	16.63	0.000306		

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN
									RADIAL	VERT		RADIAL	VERT					
131004	3	1	AC	7.1	1264600	0.3	0	10.24	-186.3	-79.6	0	-0.0082	0.003069	0	0	10.24	-197.01	-0.0082
		2	BASE	7.1	41800	0.35	7.1	10.02	148.9	-10.6	-8	0.008316	-0.008165	8	0.4702	9.2093	-65.2	-0.00234
		3	ROADBED	45.8	12900	0.45	7.1	10.02	1	-10.6	-8	0.008316	-0.02108	12	0.5339	8.498	-25.28	-0.000604
							14.2	8.913	3.6	-3.1	-0.2	0.008203	-0.01358	18	0.5158	7.534	-0.46	0.000785
							14.2	8.913	-0.6	-3.1	-0.2	0.008203	-0.02013	24	0.4508	6.6938	9.92	0.001299
														36	0.2688	5.4789	21.22	0.001458
														60	0.0417	4.6245	15.06	0.001048
131005	4	1	AC	7.8	1227800	0.3	0	10.68	-167.3	-79.6	0	-0.007328	0.002201	0	0	10.68	-176.08	-0.007328
		2	BASE	9.3	14100	0.35	7.8	10.43	136.4	-8.4	-7.3	0.007765	-0.00758	8	0.4183	9.7547	-56.24	-0.002027
		3	SUBBASE	36	39500	0.45	7.8	10.43	-1.3	-8.4	-7.3	0.007765	-0.03318	12	0.4719	9.135	-19.98	-0.000436
		4	ROADBED	20	10400	0.45	17.1	8.055	-1.5	-3.6	0	0.001976	-0.01802	18	0.4486	8.3237	1.77	0.000828
							17.1	8.055	-1.6	-3.6	0	0.001976	-0.0056	24	0.3834	7.629	10.48	0.001254
							53.1	6.889	0.1	-0.8	0	0.0009	-0.002079	36	0.217	6.6615	18.02	0.001264
							53.1	6.889	-0.5	-0.8	0	0.0009	-0.003417	60	0.0318	6.015	11.26	0.000804
131005	4	1	AC	7.5	1106600	0.3	0	10.2	-167.1	-79.6	0	-0.008138	0.002434	0	0	10.2	-176.07	-0.008138
		2	BASE	8.8	24600	0.35	7.5	9.922	133.4	-10.3	-7.5	0.008495	-0.008426	8	0.4585	9.1518	-53.48	-0.00207
		3	SUBBASE	36	27500	0.45	7.5	9.922	-0.9	-10.3	-7.5	0.008495	-0.02862	12	0.5109	8.462	-17.09	-0.00031
		4	ROADBED	20	11900	0.45	16.3	8.105	-0.5	-4	-0.1	0.004354	-0.01478	18	0.4767	7.5748	3.49	0.001004
							16.3	8.105	-1.1	-4	-0.1	0.004354	-0.01102	24	0.4029	6.8292	10.53	0.001374
							52.3	6.206	-0.2	-0.8	0	0.001	-0.002518	36	0.2254	5.8071	17.04	0.001327
							52.3	6.206	-0.5	-0.8	0	0.001	-0.003511	60	0.0331	5.1303	10.52	0.000836
133015	4	1	AC	9.9	3256400	0.15	0	3.29	-110.6	-79.6	0	-0.002427	-0.001326	0	0	3.29	-108.15	-0.002427
		2	BASE	7	33200	0.2	9.9	3.161	82.4	-5	-4.1	0.002102	-0.000966	8	0.1349	3.0167	-24.41	-0.000433
		3	SUBBASE	36	103000	0.35	9.9	3.161	-0.1	-5	-4.1	0.002102	-0.01161	12	0.1467	2.853	-6.78	-0.000104
		4	ROADBED	20	40000	0.35	16.9	2.499	-0.5	-2.8	0	0.000445	-0.007666	18	0.1425	2.6521	2.79	0.000182
							16.9	2.499	-0.8	-2.8	0	0.000445	-0.002135	24	0.1264	2.4747	8.56	0.000337
							52.9	2.066	-0.1	-0.8	0	0.000186	-0.000695	36	0.0774	2.2133	14.31	0.000405
							52.9	2.066	-0.3	-0.8	0	0.000186	-0.001439	60	0.012	2.0285	10	0.000301
133017	4	1	AC	9.9	2872600	0.15	0	7.736	-96.2	-79.6	0	-0.002337	-0.001666	0	0	7.736	-94.03	-0.002337
		2	BASE	6.4	515300	0.2	9.9	7.581	50.1	-10.8	-3.4	0.001482	-0.000947	8	0.1276	7.4668	-18.1	-0.000327
		3	SUBBASE	36	21700	0.35	9.9	7.581	7.1	-10.8	-3.4	0.001482	-0.002521	12	0.1367	7.3182	-4.88	-8.9E-05
		4	ROADBED	20	12900	0.35	16.3	7.478	13.5	-1.7	-0.7	0.002145	-0.001393	18	0.1352	7.148	0.08	0.000105
							16.3	7.478	-0.2	-1.7	-0.7	0.002145	-0.007127	24	0.1241	6.9937	5.05	0.000256
							52.3	6.242	-0.4	-0.7	0	-7E-06	-0.001944	36	0.0827	6.7561	11.53	0.00038
							52.3	6.242	-0.4	-0.7	0	-7E-06	-0.003288	60	0.0136	6.5737	9.96	0.00034

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD										RAD. MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		VERT	DIST. (in)	RADIAL DEFLECT (in)		STRESS	STRAIN	
										RADIAL		VERT	RADIAL			VERT	DISPL (mil)			STRESS
133018	4	1	AC	9.9	2159100	0.15	0	4.884	-96	-79.6	0	-0.003101	-0.002222	0	0	4.884	-93.8	-0.003101		
		2	BASE	5.3	514200	0.2	9.9	4.678	47.3	-10.7	-3.2	0.001867	-0.00122	8	0.17	4.5286	-18.43	-0.000449		
		3	SUBBASE	36	16500	0.45	9.9	4.678	9.5	-10.7	-3.2	0.001867	-0.002736	12	0.1827	4.331	-5.42	-0.00014		
		4	ROADBED	20	20900	0.45	15.2	4.577	18.3	-1.7	-1	0.002892	-0.001776	18	0.182	4.1049	-0.38	0.000122		
133020							15.2	4.577	-0.5	-1.7	-1	0.002892	-0.007539	24	0.1679	3.8981	4.91	0.000336		
							51.2	3.474	-0.6	-0.8	0	-4.9E-05	-0.001083	36	0.1125	3.5773	11.69	0.000514		
							51.2	3.474	-0.6	-0.8	0	-4.9E-05	-0.000868	60	0.0186	3.3308	10.2	0.000463		
							0	4.58	-97.6	-79.6	0	-0.003067	-0.002122	0	0	4.58	-96.32	-0.003067		
134111	3	1	AC	8.4	825800	0.3	0	10.6	-145.7	-79.6	0	-0.009247	0.001448	0	0	10.6	-153.51	-0.009247		
		2	BASE	8.5	34900	0.35	8.4	10.2	106.1	-9.3	-6	0.009118	-0.009058	8	0.5283	9.4288	-45.93	-0.002461		
		3	ROADBED	43.1	12400	0.45	8.4	10.2	0.8	-9.3	-6	0.009118	-0.0235	12	0.5965	8.6858	-17.32	-0.000702		
							16.9	8.82	2.6	-2.8	-0.2	0.007607	-0.01319	18	0.5829	7.7392	-1.52	0.000758		
134112							16.9	8.82	-0.5	-2.8	-0.2	0.007607	-0.01861	24	0.5159	6.9113	6.56	0.00138		
							0	5.442	-90.5	-79.6	0	-0.004522	-0.002059	36	0.3176	5.7032	15.08	0.001637		
	3	1	AC	15.7	651100	0.35	0	5.442	-90.5	-79.6	0	-0.004522	-0.002059	60	0.0497	4.838	11.61	0.001249		
		2	BASE	36	22700	0.35	15.7	4.665	35.3	-3.1	-1.6	0.003635	-0.004339	8	0.2416	4.6109	-19.43	-0.000912		
134112		3	ROADBED	20	31300	0.35	15.7	4.665	-0.2	-3.1	-1.6	0.003635	-0.01158	12	0.2668	4.2398	-4.19	-0.000319		
							51.7	2.748	-0.4	-0.9	0	0.000149	-0.002556	18	0.2727	3.9247	-3.99	4.4E-05		
							51.7	2.748	-0.4	-0.9	0	0.000149	-0.001924	24	0.2588	3.646	-0.03	0.000416		
							0	7.088	-90.3	-79.6	0	-0.004107	-0.001891	36	0.1817	3.2219	5.22	0.000768		
134112	4	1	AC	16	722300	0.35	0	7.088	-90.3	-79.6	0	-0.004107	-0.001891	60	0.0301	2.8973	5.77	0.000752		
		2	BASE	36	20100	0.35	16	6.381	35.3	-2.7	-1.6	0.003271	-0.003855	8	0.2195	6.3382	-18.61	-0.000777		
		3	SUBBASE	36	23500	0.35	16	6.381	-0.2	-2.7	-1.6	0.003271	-0.01094	12	0.2413	6.0048	-4.14	-0.000292		
		4	ROADBED	20	22100	0.35	52	4.406	-0.4	-0.9	0	0.000271	-0.003121	18	0.2479	5.7227	-4.2	1.6E-05		
							52	4.406	-0.4	-0.9	0	0.000271	-0.002749	24	0.2366	5.4716	-0.2	0.000361		
							88	3.65	-0.4	-0.7	0	-0.000157	-0.001628	36	0.1677	5.0857	5.24	0.000699		
							88	3.65	-0.4	-0.7	0	-0.000157	-0.001729	60	0.028	4.7875	5.92	0.000699		

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		RAD. DIST. (in)	STRESS (mil)		RADIAL STRAIN	
									RADIAL	VERT		RADIAL	VERT		RADIAL	DEFLECTI (mil)		STRESS
223056	4	1	AC	10.1	1290100	0.3	0	5.658	-106.2	-79.6	0	0	-0.003803	-0.001003	0	5.658	-111.35	-0.003803
		2	BASE	7.5	179100	0.2	10.1	5.347	52.7	-11.3	-3.1	0.003054	-0.003431	8	0.209	5.1201	-24.97	-0.000711
		3	SUBBASE	36	31400	0.35	10.1	5.347	4.3	-11.3	-3.1	0.003054	-0.006832	12	0.228	4.836	-7.21	-0.000174
		4	ROADBED	20	23100	0.35	17.6	5.027	6.9	-2.9	-0.4	0.003349	-0.003162	18	0.2232	4.5329	-1.78	0.000236
282807							17.6	5.027	0.1	-2.9	-0.4	0.003349	-0.009437	24	0.2012	4.2678	2.98	0.000472
							53.6	3.597	-0.3	-0.8	0	0.000218	-0.001791	36	0.1302	3.8803	8.54	0.00062
							53.6	3.597	-0.4	-0.8	0	0.000218	-0.002381	60	0.0208	3.5953	7.5	0.000522
283018	4	1	AC	10.5	2284600	0.3	0	4.488	-125.8	-79.6	0	0	-0.002737	-3.5E-05	0	4.488	-132.01	-0.002737
		2	BASE	6.7	18200	0.2	10.5	4.312	87.7	-3.9	-3.2	0.002684	-0.002549	8	0.1588	4.1372	-39.52	-0.000786
		3	SUBBASE	36	42600	0.45	10.5	4.312	-0.1	-3.9	-3.2	0.002684	-0.01495	12	0.1825	3.9303	-17.27	-0.000334
		4	ROADBED	20	24500	0.45	17.2	3.476	-0.3	-2	0	0.0009	-0.01045	18	0.1872	3.6725	-5.52	9.7E-05
283019							17.2	3.476	-1	-2	0	0.0009	-0.002717	24	0.1724	3.437	3.6	0.000363
							53.2	2.93	-0.5	-0.8	0	0.000173	-0.000768	36	0.1131	3.0766	13.17	0.000534
							53.2	2.93	-0.5	-0.8	0	0.000173	-0.001091	60	0.0182	2.8047	11.69	0.000456
283019	4	1	AC	9	6645000	0.15	0	4.332	-129.1	-79.6	0	0	-0.001429	-0.000565	0	4.332	-127.11	-0.001429
		2	BASE	5.8	69600	0.2	9	4.275	103.5	-4.7	-5.1	0.001299	-0.000565	8	0.0813	4.1751	-33.55	-0.000318
		3	SUBBASE	36	69600	0.35	9	4.275	0.3	-4.7	-5.1	0.001299	-0.005245	12	0.0905	4.0728	-11.99	-0.000105
		4	ROADBED	20	22900	0.35	14.8	4.032	0.1	-2.3	-0.1	0.000815	-0.003411	18	0.0896	3.9381	2.23	9.4E-05
283019							14.8	4.032	-0.4	-2.3	-0.1	0.000815	-0.002974	24	0.0803	3.8174	10.17	0.000201
							50.8	3.506	-0.2	-0.7	0	0.000154	-0.000801	36	0.05	3.6354	18.64	0.000257
							50.8	3.506	-0.3	-0.7	0	0.000154	-0.002068	60	0.0079	3.5028	13.48	0.000199
283019	4	1	AC	9.2	1155400	0.15	0	11.02	-117.9	-79.6	0	0	-0.007393	-0.003547	0	11.02	-115.76	-0.007393
		2	BASE	5.9	12700	0.2	9.2	10.67	91.4	-5.8	-4.5	0.0066	-0.003027	8	0.4107	10.178	-26.09	-0.001309
		3	SUBBASE	36	37800	0.35	9.2	10.67	-0.1	-5.8	-4.5	0.0066	-0.03669	12	0.4449	9.6712	-6.42	-0.000235
		4	ROADBED	20	11000	0.35	15.1	8.883	-0.6	-3.4	0	0.001585	-0.0249	18	0.4249	9.0303	4.76	0.000676
283019							15.1	8.883	-0.9	-3.4	0	0.001585	-0.007289	24	0.3703	8.4727	10.05	0.001087
							51.1	7.485	0	-0.8	0	0.00077	-0.002189	36	0.2192	7.6752	15.23	0.001205
							51.1	7.485	-0.3	-0.8	0	0.00077	-0.005311	60	0.0333	7.1248	9.88	0.000838
283081	4	1	AC	9.4	1296800	0.3	0	6.832	-134.6	-79.6	0	0	-0.005258	-0.000391	0	6.832	-141.35	-0.005258
		2	BASE	5.6	27200	0.2	9.4	6.548	96.9	-6.2	-3.4	0.005234	-0.005131	8	0.3027	6.1591	-42.87	-0.001476
		3	SUBBASE	36	25400	0.45	9.4	6.548	0.6	-6.2	-3.4	0.005234	-0.01874	12	0.3449	5.7468	-17.05	-0.000502
		4	ROADBED	20	17700	0.45	15	5.72	0.5	-3.1	-0.1	0.003575	-0.01191	18	0.3434	5.2298	-3.13	0.000347
283081							15	5.72	-0.9	-3.1	-0.1	0.003575	-0.009119	24	0.3079	4.7687	5.44	0.000771
							51	4.205	-0.4	-0.8	0	0.000503	-0.001716	36	0.193	4.0893	13.94	0.000972
							51	4.205	-0.5	-0.8	0	0.000503	-0.002087	60	0.0302	3.5957	11.09	0.000759

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	(in)	STRESS (psi)		DIST. (in)	DEFLECT (mil)		STRAIN
								RADIAL	VERT		RADIAL	DEFLECT	RADIAL
283090	4	1	AC	2.4	2180500	0.3	0	11.87	-435.1	-79.6	0	11.87	-505.18
		2	BASE	5.1	93100	0.2	2.4	11.84	316.9	-50.7	8	0.5544	-46.72
		3	SUBBASE	16.8	36400	0.35	2.4	11.84	1.5	-50.7	12	0.4914	46.45
		4	ROADBED	35.7	21600	0.35	7.5	10.11	16	-17.4	18	0.3246	50.64
283090							7.5	10.11	0.5	-17.4	24	0.2321	12.69
							24.3	6.194	1.4	-3.4	36	0.1097	21.69
							24.3	6.194	0.1	-3.4	60	0.016	10.18
							0	15.17	-540.2	-79.6	0	15.17	-631.04
283091	4	1	AC	2.6	2041600	0.3	0	15.17	-540.2	-79.6	0	15.17	-631.04
		2	BASE	5.7	27500	0.2	2.6	15.13	476.7	-38.3	8	0.7561	-68.67
		3	SUBBASE	15.9	35400	0.35	2.6	15.13	-1.3	-38.3	12	0.6726	62.19
		4	ROADBED	35.8	19400	0.35	8.3	10.81	0.3	-15.2	18	0.4164	79.46
283091							8.3	10.81	-1.8	-15.2	24	0.2754	18.35
							24.2	7.205	1.7	-3.7	36	0.1132	25.19
							24.2	7.205	0	-3.7	60	0.0159	9.61
							0	7.234	-107.5	-79.6	0	7.234	-112.52
285006	4	1	AC	8.3	5213200	0.15	0	2.463	-133.8	-79.6	0	2.463	-132.17
		2	BASE	8.5	139800	0.2	8.3	2.393	105.6	-7.5	8	0.1072	-33.03
		3	SUBBASE	5.8	46700	0.2	8.3	2.393	1.4	-7.5	12	0.118	-10.13
		4	ROADBED	37.4	48800	0.45	16.8	2.124	2.1	-2.4	18	0.1144	4.3
285003							16.8	2.124	0.3	-2.4	24	0.1012	10.91
							22.6	1.866	0.2	-1.7	36	0.0818	18.61
							22.6	1.866	-0.5	-1.7	60	0.0098	13.01
							0	4.075	-156.9	-79.6	0	4.075	-155.48
285003	4	1	AC	8	6295100	0.15	0	4.075	-156.9	-79.6	0	4.075	-155.48
		2	BASE	6.5	80700	0.2	8	4.021	133.9	-4.7	8	0.1092	-46.4
		3	SUBBASE	36	19100	0.35	8	4.021	1	-4.7	12	0.1238	-18.78
		4	ROADBED	20	37000	0.35	14.5	3.796	1.7	-1.7	18	0.1239	2.09
							14.5	3.796	-0.3	-1.7	24	0.1116	12.95
							50.5	2.282	-0.5	-0.8	36	0.0695	25.11
							50.5	2.282	-0.5	-0.8	60	0.0111	17.89
							0	5.6E-05	-0.002532	-0.001285	60	0.0111	17.89

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSES AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)	STRESS (psi)			STRAN	DIST. (in)	RADIAL DEFLECTI (mil)			STRESS	RADIAL STRAIN	
								RADIAL	VERT	SHR			RADIAL	DEFLECTI	RADIAL			
265803	4	1	AC	7.8	7262700	0.15	0	4.27	-171.9	-79.6	0	-0.001783	-0.000308	0	4.27	-168.26	-0.001783	
		2	BASE	6.1	26700	0.2	7.8	4.224	151.2	-3.9	-7.7	0.00173	-0.000716	8	0.1042	4.073	-54.93	-0.000516
		3	SUBBASE	36	14200	0.35	7.8	4.224	0.1	-3.9	-7.7	0.00173	-0.007512	12	0.1196	3.9325	-23.21	-0.000201
		4	ROADBED	20	41700	0.35	13.9	3.844	0.2	-1.4	0	0.001617	-0.005438	18	0.1206	3.7281	1.42	0.000102
351005							13.9	3.844	-0.4	-1.4	0	0.001617	-0.0078	24	0.109	3.5409	14.49	0.000264
							49.9	2.044	-0.5	-0.8	0	-0.001116	-0.003412	36	0.0677	3.2559	28.52	0.000353
							49.9	2.044	-0.5	-0.8	0	-0.001116	-0.001081	60	0.0108	3.0463	20.12	0.000271
							0	8.953	-126.8	-79.6	0	-0.00889	0.00226	0	0	8.953	-140.69	-0.00889
352118	4	1	AC	8.8	597100	0.35	8.8	8.37	86.1	-11.5	-4.2	0.009791	-0.01236	8	0.4836	7.624	-34.31	-0.001883
		2	BASE	8.1	23000	0.35	8.8	8.37	-1.7	-11.5	-4.2	0.009791	-0.03652	12	0.5238	6.967	-6.43	9.7E-05
		3	SUBBASE	36	61800	0.35	16.9	6.185	-2.4	-5.9	-0.1	0.002098	-0.01794	18	0.4637	6.042	4.27	0.001394
		4	ROADBED	20	17900	0.35	16.9	6.185	-1.2	-5.9	-0.1	0.002098	-0.008137	24	0.3711	5.3983	7.45	0.001593
352310							52.9	4.782	0.4	-1	0	0.000892	-0.001955	36	0.1865	4.6018	9.03	0.001245
							52.9	4.782	-0.3	-1	0	0.000892	-0.004217	60	0.024	4.1385	4.42	0.000617
							0	6.273	-117.3	-79.6	0	-0.005998	-0.00064	0	0	6.273	-122.84	-0.005998
							11.2	5.824	77.1	-3.6	-2.7	0.005733	-0.005475	8	0.345	5.4849	-35.06	-0.001645
353010	4	1	AC	7.9	2776800	0.15	7.9	7.259	112.7	-8.7	-6.6	0.003393	-0.001608	8	0.2128	6.9594	-36.7	-0.00083
		2	BASE	6.6	99200	0.35	7.9	7.259	1.4	-8.7	-6.6	0.003393	-0.008086	12	0.2354	6.6762	-10.9	-0.000198
		3	SUBBASE	36	26300	0.35	14.5	6.855	3.8	-2.8	-0.2	0.003485	-0.005566	18	0.2271	6.3001	5.13	0.000327
		4	ROADBED	20	15900	0.35	14.5	6.855	-0.1	-2.8	-0.2	0.003485	-0.01046	24	0.1999	5.9694	11.99	0.000554
356033							50.5	5.198	-0.3	-0.8	0	0.00032	-0.002183	36	0.1205	5.4844	19.82	0.000648
							50.5	5.198	-0.3	-0.8	0	0.00032	-0.003403	60	0.0189	5.1397	13.42	0.000473
							0	7.385	-142.5	-79.6	0	-0.003777	-0.001145	0	0	7.385	-138.95	-0.003777
							7.9	7.259	112.7	-8.7	-6.6	0.003393	-0.001608	8	0.2128	6.9594	-36.7	-0.00083
356033	4	1	AC	2.3	455200	0.35	2.3	22.83	15.3	-63.2	-18.5	0.006805	-0.01721	8	1.2649	18.3713	-44.79	-0.001308
		2	BASE	3.9	172100	0.35	2.3	22.83	-16.5	-63.2	-18.5	0.006805	-0.02996	12	1.2373	15.7	4.32	0.003061
		3	SUBBASE	11.4	22900	0.35	6.2	21.49	77.2	-22.7	-7.4	0.0336	-0.04545	18	0.98	12.8758	15.12	0.004174
		4	ROADBED	42.4	10200	0.35	6.2	21.49	0.7	-22.7	-7.4	0.0336	-0.09381	24	0.7644	10.8642	9.5	0.003315
							17.6	15.54	3.8	-5	-0.3	0.01791	-0.03291	36	0.4013	8.4389	13.81	0.0025
							17.6	15.54	0.3	-5	-0.3	0.01791	-0.05	60	0.0589	6.989	8.13	0.001491

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)				MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULU	POIS	DEF (in)	STRESS (psi)				DIST. (in)	DEFLECT (in)					
								RADIAL	VERT	SHR	STRAIN		RADIAL	DISPL	DEFLECT	STRESS		
											RADIAL						VERT	
356033	4	1	AC	2.7	458800	0.35	0	18.72	-195.6	-79.6	0	-0.02243	0	0	18.72	-235.68	-0.02243	-0.001098
		2	BASE	4.5	156100	0.35	2.7	18.64	32	-60.4	-14.8	0.00864	8	1.0705	14.9955	-39.5	0.00257	
		3	SUBBASE	12	26100	0.35	2.7	18.64	-11.5	-60.4	-14.8	0.00864	12	1.0462	12.82	4.2	0.00337	
		4	ROADBED	40.8	12200	0.35	7.2	17.18	55.3	-19.9	-4.9	0.02726	18	0.8353	10.5765	11.59	0.002745	
401015							7.2	17.18	1.1	-19.9	-4.9	0.02726	24	0.6592	8.9883	7.85	0.002141	
							19.2	12.31	3.1	-4.5	-0.2	0.01331	36	0.3539	7.0431	11.84	0.001322	
							19.2	12.31	0.2	-4.5	-0.2	0.01331	60	0.0523	5.8633	7.31		
							0	7.998	-120.1	-79.6	0	-0.007178	0	0	7.998	-124.41	-0.007178	
401015	4	1	AC	1.3	855700	0.3	0	7.971	-83	-77.1	-8.7	-0.004104	8	0.4225	7.1312	-35.17	-0.002005	
		2	BASE	8.1	1121500	0.3	1.3	7.971	-102.5	-77.1	-8.7	-0.004104	12	0.4842	6.5922	-16.57	-0.000866	
		3	SUBBASE	36	12600	0.35	1.3	7.971	-102.5	-77.1	-8.7	-0.004104	18	0.4917	5.8665	-3.19	0.000389	
		4	ROADBED	20	26500	0.35	9.4	7.659	110.9	-5.1	-7.8	0.006856	24	0.4458	5.2425	4.74	0.001046	
401015							9.4	7.659	-0.5	-5.1	-7.8	0.006856	36	0.283	4.2708	13.18	0.001409	
							45.4	3.42	-0.5	-1.1	0	0.000335	60	0.0449	3.5533	10.54	0.001126	
							45.4	3.42	-0.4	-1.1	0	0.000335	0	0	10.54	-153.53	-0.01141	
							0	10.54	-98.7	-77.2	-12.7	-0.005513	8	0.6515	9.0074	-40.16	-0.002528	
401017	3	1	AC	9.8	295200	0.35	0	14.02	-128.1	-79.6	0	-0.01177	8	1.0088	11.454	-40.44	-0.005232	
		2	BASE	36	9800	0.35	9.8	12.76	82.8	-7.7	-5.4	0.01861	12	1.1527	9.9695	-14.11	-0.001512	
		3	ROADBED	20	25600	0.35	9.8	12.76	-0.4	-7.7	-5.4	0.01861	18	1.1289	8.2457	-2.64	0.00148	
							45.8	3.829	-0.6	-1.4	0	0.000865	24	0.6397	5.9218	6.75	0.001658	
404086							45.8	3.829	-0.4	-1.4	0	0.000865	36	0.3963	4.447	15.75	0.002035	
							45.4	3.674	-0.6	-1.2	0	0.000617	60	0.0614	3.3933	11.96	0.001545	
							0	14.02	-128.1	-79.6	0	-0.0177	0	0	14.02	-139.66	-0.0177	
							9.8	12.76	82.8	-7.7	-5.4	0.01861	8	1.0088	11.454	-40.44	-0.005232	
404086	3	1	AC	12.3	319300	0.33	0	15.06	-102.1	-79.6	0	-0.01278	8	0.7066	13.092	-25.02	-0.002805	
		2	BASE	36	13000	0.35	12.3	13.66	53.3	-5.3	-3.2	0.01154	12	0.7853	12.105	-7.63	-0.000929	
		3	ROADBED	20	10100	0.35	12.3	13.66	-0.1	-5.3	-3.2	0.01154	18	0.7865	11.0908	-3.25	0.000577	
							48.3	8.608	-0.3	-1	0	0.00121	24	0.7186	10.2014	2.01	0.001586	
404086							48.3	8.608	-0.3	-1	0	0.00121	36	0.4694	8.8846	7.64	0.002216	
							48.3	8.608	-0.3	-1	0	0.00121	60	0.0743	7.9215	6.86	0.001865	
							0	15.06	-102.1	-79.6	0	-0.01278	0	0	15.06	-109.76	-0.01278	
							12.3	13.66	53.3	-5.3	-3.2	0.01154	8	0.7066	13.092	-25.02	-0.002805	

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION			DEPTH			MECHANISTIC RESPONSES UNDER THE LOAD					RAD. MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULU	POIS	(in)	STRESS (psi)		STRAIN		VERT	DIST. (in)	RADIAL DEFLECTI		STRESS	RADIAL STRAIN
								RADIAL	VERT	RADIAL	VERT			DISPL (in)	DEFLECTI (mil)		
404088	4	1	AC	4.6	864600	0.32	0	15	-208.1	-79.6	0	-0.0138	0.00642	0	15	-236.74	-0.0138
		2	BASE	7.7	105400	0.35	4.6	14.82	125.6	-32.9	-14.4	0.01137	-0.01271	8	0.7149	13.0295	-0.002124
		3	SUBBASE	6.2	11600	0.2	4.6	14.82	1.9	-32.9	-14.4	0.01137	-0.03043	12	0.7518	11.745	0.00056
		4	ROADBED	41.5	10000	0.45	12.3	13.19	23.7	-5.1	-0.7	0.01607	-0.02085	18	0.6595	10.1862	0.001749
404157							12.3	13.19	1.1	-5.1	-0.7	0.01607	-0.04569	24	0.5554	8.9401	0.001802
							18.5	11.04	0.8	-2.8	-0.1	0.00999	-0.02672	36	0.3249	7.2364	0.001796
							18.5	11.04	-0.5	-2.8	-0.1	0.00999	-0.0242	60	0.051	6.0768	0.001279
							0	15.21	-126.1	-79.6	0	-0.002367	-0.00987	0	15.21	-124.2	-0.002367
404165	4	1	AC	9.1	3908500	0.15	9.1	15.11	89.7	-5.6	-3.7	0.001921	-0.000875	8	0.1365	14.9472	-0.000576
		2	BASE	3.7	402400	0.35	9.1	15.11	9.2	-5.6	-3.7	0.001921	-0.002855	12	0.1541	14.78	-0.00252
		3	ROADBED	47.2	6400	0.35	12.8	15	16.1	-1.2	-0.7	0.002704	-0.003138	18	0.1577	14.5658	-1.6
							12.8	15	-0.3	-1.2	-0.7	0.002704	-0.01342	24	0.1459	14.3567	7.8E-05
404165							12.8	15	-0.3	-1.2	-0.7	0.002704	-0.01342	36	0.0963	14.0317	0.000295
							12.8	15	-0.3	-1.2	-0.7	0.002704	-0.01342	60	0.0158	13.78	0.000396
							0	11.98	-165.1	-79.6	0	-0.01577	0.003233	0	11.98	-179.65	-0.01577
							2.5	11.94	-44.2	-64.5	-14.9	-0.002205	-0.006927	8	0.8812	9.9409	-0.003555
404165							2.5	11.94	-44.2	-64.5	-14.9	-0.002205	-0.006927	12	0.9704	8.605	-0.00455
							7.6	11.42	127.3	-8.9	-11.5	0.01687	-0.01635	18	0.9017	6.833	0.001965
							7.6	11.42	-0.7	-8.9	-11.5	0.01687	-0.05623	24	0.7598	5.4609	0.002627
							43.6	2.994	-0.7	-1.5	0	0.000838	-0.008454	36	0.4212	3.5024	0.002523
404165							43.6	2.994	-0.4	-1.5	0	0.000838	-0.003736	60	0.0611	2.2205	0.001547
							0	10.48	-134.5	-79.6	0	-0.01198	3.8E-05	0	10.48	-147.63	-0.01198
							2.9	10.36	-30.7	-63.7	-11.4	-0.000704	-0.007982	8	0.6617	8.8923	-0.002426
							2.9	10.36	-34.1	-63.7	-11.4	-0.000704	-0.007666	12	0.7205	7.9285	-0.00022
407024							8.5	9.875	94.7	-9.4	-8.1	0.01225	-0.0123	18	0.6681	6.7748	0.001435
							8.5	9.875	-0.4	-9.4	-8.1	0.01225	-0.03835	24	0.5644	5.819	0.001915
							44.5	4.672	-0.3	-1.3	0	0.001301	-0.005125	36	0.3183	4.5193	0.001849
							44.5	4.672	-0.3	-1.3	0	0.001301	-0.005367	60	0.0463	3.6648	0.001173
407024							0	14.4	-53.9	-79.6	0	-0.001852	-0.009982	0	14.4	-57.14	-0.001852
							2.5	14.14	-45.9	-77.6	-1.6	-0.000745	-0.01097	8	0.158	13.8118	-0.001393
							2.5	14.14	-39.8	-77.6	-1.6	-0.000745	-0.006689	12	0.2099	13.585	-0.001089
							3.8	14.03	-42.3	-71.8	-2.9	-0.001293	-0.007552	18	0.248	13.4067	-0.00182
407024							3.8	14.03	-81	-71.8	-2.9	-0.001293	-0.001062	24	0.2385	13.1833	0.000387
							11.9	13.97	103	-1.4	-9.6	0.001978	-0.000814	36	0.1626	12.835	0.000725
							11.9	13.97	-0.4	-1.4	-9.6	0.001978	-0.01243	60	0.0264	12.5675	0.000661
							11.9	13.97	-0.4	-1.4	-9.6	0.001978	-0.01243	60	0.0264	12.5675	0.000661

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)	STRESS (psi)		DIST. (in)	RADIAL DISPL (mil)	DEFLECT (mil)	RADIAL STRESS	STRAIN	RADIAL STRAIN
								RADIAL	VERT						
451008	4	1	AC	4	582800	0.3	18.84	-254.4	-79.6	0	0	18.84	-284.52	-0.0271	-0.0271
		2	BASE	9.6	35500	0.35	4	18.58	-33	8	1.3011	14.6968	-49.47	-0.001513	-0.001513
		3	SUBBASE	36	9400	0.35	4	18.58	-33	12	1.269	12.03	9.92	0.003626	0.003626
		4	ROADBED	20	27100	0.35	13.6	13.73	10.6	18	0.9666	9.0329	24.08	0.004723	0.004723
451011							13.6	13.73	0.3	24	0.7359	6.9191	12.72	0.003428	0.003428
							49.6	3.591	-0.6	36	0.3675	4.3722	17.45	0.00249	0.00249
							49.6	3.591	-0.4	60	0.0534	2.8863	8.97	0.001352	0.001352
							0	17.76	-328.7	0	0	17.76	-392.49	-0.02526	-0.02526
451024	3	1	AC	3.3	797900	0.32	3.3	17.61	-34.1	8	1.1273	13.3406	-54.41	0.000351	0.000351
		2	BASE	9.7	27900	0.35	3.3	17.61	-34.1	12	1.0232	10.574	32.1	0.005204	0.005204
		3	ROADBED	47	19600	0.35	13	11.49	1.9	18	0.6594	7.747	43.21	0.00512	0.00512
							13	11.49	-0.1	24	0.4406	6.0238	14.85	0.002866	0.002866
451024							13	11.49	-0.1	36	0.1812	4.2637	15.36	0.001514	0.001514
							6.2	23.94	-7.6	60	0.0246	3.424	6.02	0.000627	0.000627
							0	30.73	-648.1	0	0	30.73	-738.94	-0.04131	-0.04131
							1.6	30.68	517.7	8	1.4221	19.878	10.48	0.006768	0.006768
455017	4	1	AC	8.8	3426400	0.15	8.8	3.644	-13.8	12	1.0907	14	108.41	0.009829	0.009829
		2	BASE	5.6	796400	0.2	8.8	3.644	10.1	18	0.5537	9.1072	78.69	0.008484	0.008484
		3	SUBBASE	36	27100	0.35	14.4	3.562	21	24	0.3366	6.6248	4.64	0.002493	0.002493
		4	ROADBED	20	35500	0.35	14.4	3.562	-0.1	36	0.132	4.2274	15.99	0.001218	0.001218
455017							50.4	2.36	-0.4	60	0.0181	3.1577	5.63	0.000461	0.000461
							0	3.764	-103.9	0	0	3.764	-102.29	-0.002163	-0.002163
							8.8	3.644	53.2	8	0.1193	3.5173	-20.95	-0.000334	-0.000334
							8.8	3.644	10.1	12	0.1287	3.375	-6.21	-9.7E-05	-9.7E-05
455017							14.4	3.562	-0.1	18	0.1272	3.2051	0.56	0.000109	0.000109
							14.4	3.562	-0.1	24	0.1161	3.0497	6.04	0.000251	0.000251
							50.4	2.36	-0.4	36	0.0763	2.8134	13.15	0.00036	0.00036
							50.4	2.36	-0.4	60	0.0125	2.634	10.88	0.000312	0.000312
455017	4	1	AC	9	4913900	0.15	0	4.779	-118	0	0	4.779	-116.14	-0.001745	-0.001745
		2	BASE	6.1	498100	0.2	9	4.698	78.1	8	0.0989	4.5863	-29.3	-0.000368	-0.000368
		3	SUBBASE	36	10400	0.35	9	4.698	6.4	12	0.1098	4.4665	-11.28	-0.000143	-0.000143
		4	ROADBED	20	34400	0.35	15.1	4.614	12.2	18	0.1108	4.3118	-0.51	7.1E-05	7.1E-05
455017							15.1	4.614	-0.3	24	0.102	4.1685	7.26	0.000211	0.000211
							51.1	2.449	-0.5	36	0.0672	3.9474	16.75	0.000317	0.000317
							51.1	2.449	-0.5	60	0.0111	3.7773	13.84	0.000276	0.000276

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSE AT DEPTH = 0.							
		NO.	TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)			STRAIN			DIST. (in)	RADIAL DISPL	DEFLECTI (mil)	RADIAL STRESS	RADIAL STRAIN	RADIAL DISPL	DEFLECTI (mil)	RADIAL STRESS	RADIAL STRAIN	
									RADIAL	VERT	SHR	RADIAL	VERT	SHR										
455034	4	1	AC	8.5	1977900	0.15	0	6.588	-125	-79.6	0	-0.004637	-0.001964	0	0	0	6.588	-123.23	0	0	6.588	-123.23	-0.004637	
		2	BASE	4.9	44100	0.2	8.5	6.399	97.9	-7.6	-4.8	0.004154	-0.001952	8	0.2566	6.0614	-27.37	-9.6E-05	8	0.2566	6.0614	-27.37	-0.000798	
		3	SUBBASE	36	44600	0.35	8.5	6.399	0.7	-7.6	-4.8	0.004154	-0.001952	12	0.2767	5.731	5.86	0.000476	12	0.2767	5.731	5.86	0.000476	
		4	ROADBED	20	19000	0.35	13.4	5.798	0.4	-4.2	-0.1	0.002701	-0.00887	18	0.2607	5.315	6.42	0.000693	18	0.2607	5.315	6.42	0.000693	
457019							13.4	5.798	-0.4	-4.2	-0.1	0.002701	-0.008804	24	0.2246	4.9578	11.01	0.000735	24	0.2246	4.9578	11.01	0.000735	
							49.4	4.41	-0.1	-0.9	0	0.000538	-0.001773	36	0.1308	4.4524	15.97	0.000499	36	0.1308	4.4524	15.97	0.000499	
							49.4	4.41	-0.3	-0.9	0	0.000538	-0.003362	60	0.0198	4.1078	10.07	0.000499	60	0.0198	4.1078	10.07	0.000499	
	4	1	AC	2.6	819200	0.3	0	7.336	-78.8	-79.6	0	-0.003967	-0.003984	0	0	0	7.336	-82.99	0	0	7.336	-82.99	-0.003967	
457019							2.6	7.218	-54.3	-72	-8.6	-0.002086	-0.005062	8	0.2525	6.8298	-24.4	-0.001468	8	0.2525	6.8298	-24.4	-0.001468	
							2.6	7.218	-89.4	-72	-8.6	-0.002086	-0.001442	12	0.2991	6.5495	-11.05	-0.000711	12	0.2991	6.5495	-11.05	-0.000711	
							9.6	7.126	117.6	-4	-12.3	0.003265	-0.001417	18	0.3095	6.1933	-2.41	0.000213	18	0.3095	6.1933	-2.41	0.000213	
							9.6	7.126	-0.5	-4	-12.3	0.003265	-0.01192	24	0.2801	5.8565	3.18	0.000685	24	0.2801	5.8565	3.18	0.000685	
472008							45.6	5.164	-0.3	-0.9	0	0.000497	-0.002628	36	0.1746	5.3476	8.05	0.000891	36	0.1746	5.3476	8.05	0.000891	
							45.6	5.164	-0.3	-0.9	0	0.000497	-0.003809	60	0.0273	4.9755	6.22	0.000885	60	0.0273	4.9755	6.22	0.000885	
	4	1	AC	2.7	808200	0.3	0	9.022	-100.6	-79.6	0	-0.005975	-0.002466	0	0	0	9.022	-107.57	0	0	9.022	-107.57	-0.005975	
							2.7	8.923	-54.1	-69.2	-9.1	-0.002267	-0.004854	8	0.359	8.2917	-31.25	-0.001811	8	0.359	8.2917	-31.25	-0.001811	
473075							2.7	8.923	-53.8	-69.2	-9.1	-0.002267	-0.003528	12	0.4129	7.8648	-12.85	-0.000697	12	0.4129	7.8648	-12.85	-0.000697	
							9.5	8.743	93.7	-5.5	-9.7	0.005313	-0.002447	18	0.4135	7.33	-1.71	0.000445	18	0.4135	7.33	-1.71	0.000445	
							9.5	8.743	-0.5	-5.5	-9.7	0.005313	-0.01751	24	0.3676	6.8465	4.81	0.000981	24	0.3676	6.8465	4.81	0.000981	
							45.5	6.172	-0.1	-0.9	0	0.000904	-0.003095	36	0.2248	6.1357	10.49	0.001174	36	0.2248	6.1357	10.49	0.001174	
473075							45.5	6.172	-0.3	-0.9	0	0.000904	-0.005103	60	0.0346	5.6293	7.81	0.00087	60	0.0346	5.6293	7.81	0.00087	
	4	1	AC	10.7	1273200	0.3	0	3.175	-87.6	-79.6	0	-0.002825	-0.001926	0	0	0	3.175	-91.53	0	0	3.175	-91.53	-0.002825	
							10.7	2.836	16	-16.5	-2.3	0.001238	-0.002115	8	0.1483	2.7251	-15.31	-0.00031	8	0.1483	2.7251	-15.31	-0.00031	
							10.7	2.836	7.5	-16.5	-2.3	0.001238	-0.002598	12	0.1562	2.5205	-2.77	-6.7E-05	12	0.1562	2.5205	-2.77	-6.7E-05	
473075							18	2.721	19.9	-1.8	-1	0.00218	-0.001341	18	0.1557	2.344	-2.9	6.3E-05	18	0.1557	2.344	-2.9	6.3E-05	
							18	2.721	-0.5	-1.8	-1	0.00218	-0.005725	24	0.1467	2.1878	0.5	0.000241	24	0.1467	2.1878	0.5	0.000241	
							54	1.826	-0.7	-0.8	0	-1.8E-05	-0.000896	36	0.1033	1.9481	5.58	0.000433	36	0.1033	1.9481	5.58	0.000433	
							54	1.826	-0.7	-0.8	0	-1.8E-05	-0.000493	60	0.0174	1.7612	6.12	0.000433	60	0.0174	1.7612	6.12	0.000433	
473075							0	34.17	-357	-79.6	0	-0.01915	0.0121	0	0	0	34.17	-406.82	0	0	34.17	-406.82	-0.01915	
	4	1	AC	4.2	1185900	0.31	0	34.17	-357	-79.6	0	-0.01915	0.0121	0	0	0	34.17	-406.82	0	0	34.17	-406.82	-0.01915	
							4.2	34.05	316.6	-19.9	-34.3	0.01927	-0.01784	8	0.9984	31.2562	-110.3	-0.003209	8	0.9984	31.2562	-110.3	-0.003209	
							4.2	34.05	-1.7	-19.9	-34.3	0.01927	-0.06396	12	1.0532	29.1375	-19.83	0.001007	12	1.0532	29.1375	-19.83	0.001007	
473075							14.5	29.6	4.1	-4.4	-0.3	0.01941	-0.03416	18	0.888	26.3592	27.19	0.003192	18	0.888	26.3592	27.19	0.003192	
							14.5	29.6	0	-4.4	-0.3	0.01941	-0.05661	24	0.7064	24.1708	36.68	0.002992	24	0.7064	24.1708	36.68	0.002992	
							50.5	21.15	-0.2	-0.9	0	0.002587	-0.009849	36	0.3532	21.3583	23.79	0.002443	36	0.3532	21.3583	23.79	0.002443	
							50.5	21.15	-0.3	-0.9	0	0.002587	-0.01628	60	0.0518	19.6825	18.15	0.001307	60	0.0518	19.6825	18.15	0.001307	

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				MECHANISTIC RESPONSES UNDER THE LOAD										RAD. MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	DEPTH (in)	DEF (mil)	STRESS (psi)			STRAIN			DIST. (in)	DEFLECT (mil)			STRESS		
									RADIAL	VERT	SHR	RADIAL	VERT	RADIAL		STRESS	RADIAL	STRESS	RADIAL	STRESS	
473110	3	1	AC	9.6	501100	0.31	0	7.566	-111.3	-79.6	0	-0.0014	0	0	7.566	-117.56	-0.01	-0.001775	-26.31	-0.001775	
		2	BASE	36	34200	0.45	9.6	6.793	66.2	-10.6	-5.2	-0.0063	8	0.5402	6.1136	-26.31	-0.001775	3.3E-05			
		3	ROADBED	20	23300	0.45	9.6	6.793	-1.8	-10.6	-5.2	-0.0232	12	0.5791	5.326	-4.79	0.001231	0.001231			
							45.6	3.598	-0.1	-1.2	0	-0.001373	18	0.5287	4.4932	2.31	0.001567	0.001567			
476022	4	1	AC				45.6	3.598	-0.4	-1.2	0	-0.003668	24	0.442	3.8186	5.59	0.001435	0.001435			
		2	BASE									60	0.0354	2.3475	5.12	0.000898	0.000898				
		3	SUBBASE																		
		4	ROADBED																		
479025	4	1	AC	4.9	367000	0.35	0	11.44	-114.8	-79.6	0	-0.000104	0	0	11.44	-123.76	-0.01201	-0.002488	-28.8	-0.002488	
		2	BASE	6.2	241800	0.2	6.2	10.87	16.6	-36.3	-5.8	0.005639	8	0.6599	9.6774	-28.8	-0.000597	-0.000597			
		3	SUBBASE	6.8	14700	0.35	6.2	10.87	8.1	-36.3	-5.8	0.005639	12	0.7258	8.7252	-8.5	0.000775	0.000775			
		4	ROADBED	40.8	13100	0.45	12.4	10.25	37.6	-5.2	-1.7	0.01269	18	0.7091	7.6927	-2.37	0.001522	0.001522			
481046	4	1	AC				12.4	10.25	0.2	-5.2	-1.7	-0.03471	24	0.6382	6.7996	2.76	0.001981	0.001981			
		2	BASE				19.2	8.491	0.1	-2.8	-0.1	0.00704	36	0.4099	5.4933	8.97	0.001631	0.001631			
		3	SUBBASE				19.2	8.491	-0.6	-2.8	-0.1	0.00704	60	0.065	4.544	7.77	-0.02016	-0.02016			
		4	ROADBED				4.9	14.15	64.6	-34.4	-7.5	0.01528	8	1.0056	11.5347	-35.53	0.002035	0.002035			
481047	4	1	AC	13.2	716300	0.32	0	5.663	-94.9	-79.6	0	-0.005231	0	0	5.663	-100.86	-0.000987	-0.000987			
		2	BASE	8.4	74800	0.35	13.2	5.006	40.9	-5.7	-1.7	0.004051	8	0.2841	4.8368	-21.09	-0.00034	-0.00034			
		3	SUBBASE	5.4	7500	0.35	13.2	5.006	1.9	-5.7	-1.7	0.004051	12	0.3118	4.4405	-5.83	0.000127	0.000127			
		4	ROADBED	33	24100	0.45	21.6	4.479	3.8	-1.8	-0.1	0.004042	18	0.3154	4.0661	-3.7	0.000535	0.000535			
481047	4	1	AC				21.6	4.479	-0.5	-1.8	-0.1	-0.01872	24	0.2951	3.7319	0.88	0.000884	0.000884			
		2	BASE				27	3.615	-0.7	-1.5	0	0.001062	36	0.2027	3.223	6.58	0.000836	0.000836			
		3	SUBBASE				27	3.615	-0.7	-1.5	0	0.001062	60	0.0334	2.8345	6.8	-0.02202	-0.02202			
		4	ROADBED				10.2	11.91	-96.2	-79.6	0	-0.02202	8	1.0869	10.2139	-10.46	0.002139	0.002139			
		1	AC	10.2	159500	0.3	10.2	11.91	29	-17.7	-2.7	-0.04338	12	1.051	8.555	3.12	0.002662	0.002662			
		2	BASE	15.6	40500	0.35	10.2	11.91	0.7	-17.7	-2.7	-0.04338	18	0.8923	7.2688	2.46	0.002617	0.002617			
		3	SUBBASE	16.5	14400	0.2	25.8	7.882	2.7	-3.1	-0.1	0.006906	24	0.7358	6.304	2.82	0.002293	0.002293			
		4	ROADBED	20	15400	0.45	25.8	7.882	0.5	-3.1	-0.1	0.006906	36	0.4275	5.1008	3.87	0.001625	0.001625			
		1	AC				42.3	5.519	0.1	-1.3	0	-0.002213	60	0.0644	4.331	2.88	0.002293	0.002293			
		2	BASE				42.3	5.519	-0.5	-1.3	0	-0.002213	60	0.0644	4.331	2.88	0.002293	0.002293			
		3	SUBBASE																		
		4	ROADBED																		

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION			DEPTH (in)			MECHANISTIC RESPONSES UNDER THE LOAD					RAD. MECHANISTIC RESPONSE AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULU	POIS	DEF (in)	STRESS (psi)		SHR	STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (in)	RADIAL STRESS	RADIAL STRAIN
								RADIAL	VERT		RADIAL	VERT					
473110	3	1	AC	9.6	501100	0.31	0	7.566	-111.3	-79.6	0	-0.014	0	0	7.566	-117.56	-0.01
		2	BASE	36	34200	0.45	9.6	6.793	66.2	-10.6	-5.2	-0.01063	8	0.5402	6.1136	-26.31	-0.001775
		3	ROADBED	20	23300	0.45	9.6	6.793	-1.8	-10.6	-5.2	-0.0232	12	0.5791	5.326	-4.791	3.3E-05
							45.6	3.598	-0.1	-1.2	0	-0.003132	18	0.5287	4.4932	2.31	0.001231
476022							45.6	3.598	-0.4	-1.2	0	-0.003668	24	0.442	3.8186	5.59	0.001567
											0.001373		36	0.247	2.9252	8.1	0.001435
													60	0.0354	2.3475	5.12	0.000898
479025	4	1	AC	6.2	413200	0.33	0	11.44	-114.8	-79.6	0	-0.01201	0	0	11.44	-123.76	-0.01201
		2	BASE	6.2	241800	0.2	6.2	10.87	16.6	-36.3	-5.8	-0.005639	8	0.6599	9.6774	-28.8	-0.002488
		3	SUBBASE	6.8	14700	0.35	6.2	10.87	8.1	-36.3	-5.8	-0.01611	12	0.7258	8.7252	-8.5	-0.000597
		4	ROADBED	40.8	13100	0.45	12.4	10.25	37.6	-5.2	-1.7	-0.01269	18	0.7091	7.6927	-2.37	0.000775
481046							12.4	10.25	0.2	-5.2	-1.7	-0.03471	24	0.6382	6.7996	2.76	0.001522
							19.2	8.491	0.1	-2.8	-0.1	-0.00704	36	0.4099	5.4933	8.97	0.001981
							19.2	8.491	-0.6	-2.8	-0.1	-0.01745	60	0.065	4.544	7.77	0.001631
481047	4	1	AC	4.9	367000	0.35	0	14.6	-154.3	-79.6	0	-0.02016	0	0	14.6	-179.89	-0.02016
		2	BASE	1.9	150000	0.35	4.9	14.15	64.6	-34.4	-7.5	-0.01528	8	1.0056	11.5347	-35.53	-0.002035
		3	SUBBASE	12	34700	0.35	4.9	14.15	17.1	-34.4	-7.5	-0.03084	12	1.0082	9.7317	2	0.002258
		4	ROADBED	41.2	17000	0.35	6.8	13.56	40.8	-22.4	-4.5	-0.02293	18	0.7939	7.8669	10.67	0.003582
481048							6.8	13.56	0.9	-22.4	-4.5	-0.06364	24	0.6049	6.5566	7.61	0.002842
							18.8	9.433	3.2	-5.1	-0.2	-0.02072	36	0.3076	5.0202	8.59	0.001957
							18.8	9.433	0.2	-5.1	-0.2	-0.03046	60	0.0442	4.1208	4.97	0.001121
481049	4	1	AC	13.2	716300	0.32	0	5.663	-94.9	-79.6	0	-0.005231	0	0	5.663	-100.86	-0.005231
		2	BASE	8.4	74800	0.35	13.2	5.006	40.9	-5.7	-1.7	-0.004509	8	0.2841	4.8368	-21.09	-0.000987
		3	SUBBASE	5.4	7500	0.35	13.2	5.006	1.9	-5.7	-1.7	-0.00869	12	0.3118	4.4405	-5.83	-0.00034
		4	ROADBED	33	24100	0.45	21.6	4.479	3.8	-1.8	-0.1	-0.004042	18	0.3154	4.0661	-3.7	0.000127
481050							21.6	4.479	-0.5	-1.8	-0.1	-0.004042	24	0.2951	3.7319	0.88	0.000535
							27	3.615	-0.7	-1.5	0	-0.01062	36	0.2027	3.223	6.58	0.000884
							27	3.615	-0.7	-1.5	0	-0.03342	60	0.0334	2.8345	6.8	0.000836
481051	4	1	AC	10.2	159500	0.3	0	13.91	-86.2	-79.6	0	-0.02202	0	0	13.91	-90.28	-0.02202
		2	BASE	15.6	40500	0.35	10.2	11.19	29	-17.7	-2.7	-0.01561	8	1.0869	10.2139	-10.46	-0.000194
		3	SUBBASE	16.5	14400	0.2	10.2	11.19	0.7	-17.7	-2.7	-0.04338	12	1.051	8.555	3.12	0.002139
		4	ROADBED	20	15400	0.45	25.8	7.882	2.7	-3.1	-0.1	-0.006906	18	0.8923	7.2688	2.46	0.002662
481052							25.8	7.882	0.5	-3.1	-0.1	-0.006906	24	0.7358	6.304	2.82	0.002617
							42.3	5.519	0.1	-1.3	0	-0.002213	36	0.4275	5.1008	3.87	0.002293
							42.3	5.519	-0.5	-1.3	0	-0.005932	60	0.0644	4.331	2.88	0.001625

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH				MECHANISTIC RESPONSES UNDER THE LOAD						RAD. MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	(in)	DEF		STRESS (psi)		STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	STRAIN	
								(mil)	VERT	SHR	RADIAL	VERT							
481048	3	1	AC	11.1	491100	0.35	0	8.819	-104.4	-79.6	0	-0.007858	-0.00651	0	0	8.819	-115.2	-0.007858	
		2	BASE	36	34900	0.35	11.1	7.975	53.5	-8.7	-3.5	0.00753	-0.009698	8	0.4289	7.5347	-25.92	-0.001745	
		3	ROADBED	20	17000	0.35	11.1	7.975	0.1	-8.7	-3.5	0.00753	-0.02203	12	0.4731	6.8828	-5.98	-0.000326	
							47.1	5.152	0	-1	0	0.001059	-0.002885	18	0.4538	6.2356	-1.11	0.000676	
							47.1	5.152	-0.3	-1	0	0.001059	-0.004849	24	0.3974	5.6929	3.1	0.001134	
481065	4	1	AC	8.3	968600	0.3	0	12.54	-156.3	-79.6	0	-0.008641	0.001914	60	0.0362	4.4327	5.33	0.000913	
		2	BASE	4.8	12900	0.35	8.3	12.2	124.1	-6.8	-4.5	0.008996	-0.00865	8	0.4969	11.4542	-51.49	-0.002402	
		3	SUBBASE	36	20000	0.45	8.3	12.2	-1.1	-6.8	-4.5	0.008996	-0.03517	12	0.5634	10.74	-19.89	-0.00068	
		4	ROADBED	20	8800	0.45	13.1	10.78	-1.1	-3.9	-0.1	0.004856	-0.02397	18	0.5484	9.817	-0.79	0.000786	
							13.1	10.78	-1.5	-3.9	-0.1	0.004856	-0.01307	24	0.4803	9.0112	8.28	0.00138	
							49.1	8.378	-0.2	-0.8	0	0.001308	-0.003359	36	0.2867	7.8453	17.05	0.001551	
							49.1	8.378	-0.5	-0.8	0	0.001308	-0.004677	60	0.0437	7.0305	12.03	0.001102	
481076	4	1	AC	4.7	271200	0.35	0	19.03	-152.7	-79.6	0	-0.02711	0.0107	0	0	19.03	-179.99	-0.02711	
		2	BASE	8.4	44200	0.35	4.7	18.36	81.3	-39.7	-10.2	0.02532	-0.03466	8	1.2573	14.7095	-25.74	-0.000384	
		3	SUBBASE	36	21100	0.35	4.7	18.36	-3.1	-39.7	-10.2	0.02532	-0.08037	12	1.1765	12.315	10.53	0.004716	
		4	ROADBED	20	11600	0.35	13.1	14.07	6.9	-10.8	-0.7	0.01825	-0.03528	18	0.8385	10.1085	12.38	0.004876	
							13.1	14.07	0.5	-10.8	-0.7	0.01825	-0.05131	24	0.6099	8.7065	5.99	0.003194	
							49.1	7.797	0.1	-1.2	0	0.00212	-0.005441	36	0.3005	7.174	6.34	0.001972	
							49.1	7.797	-0.2	-1.2	0	0.00212	-0.008417	60	0.0426	6.3283	3.52	0.001082	
481077	4	1	AC	5	636100	0.32	0	10.17	-159.7	-79.6	0	-0.01343	0.00363	0	0	10.17	-181.36	-0.01343	
		2	BASE	9.9	75500	0.35	5	9.847	98.6	-33.8	-11.5	0.01259	-0.01464	8	0.6434	8.1601	-29.1	-0.000556	
		3	SUBBASE	36	34200	0.35	5	9.847	-2.3	-33.8	-11.5	0.01259	-0.03955	12	0.6171	6.983	8.69	0.002066	
		4	ROADBED	20	20200	0.35	14.9	7.494	5.8	-8	-0.5	0.008466	-0.01589	18	0.4563	5.8322	13.96	0.002449	
							14.9	7.494	0.4	-8	-0.5	0.008466	-0.02363	24	0.3371	5.0588	7.66	0.001702	
							50.9	4.397	0	-1.1	0	0.001001	-0.002943	36	0.1669	4.1857	8.11	0.001098	
							50.9	4.397	-0.3	-1.1	0	0.001001	-0.004358	60	0.0239	3.6925	4.47	0.000606	
481077	4	1	AC	5.2	484100	0.31	0	9.727	-146.9	-79.6	0	-0.0163	0.002359	0	0	9.727	-165.27	-0.0163	
		2	BASE	10.8	53200	0.35	5.2	9.258	94.7	-32.9	-10.9	0.01606	-0.01805	8	0.7594	7.264	-21.46	3.6E-05	
		3	SUBBASE	36	48100	0.35	5.2	9.258	-3.2	-32.9	-10.9	0.01606	-0.053	12	0.6983	5.8798	13.59	0.003227	
		4	ROADBED	20	27000	0.35	16	5.893	0.5	-9.1	-0.3	0.006399	-0.01755	18	0.4678	4.6017	16.26	0.003373	
							16	5.893	0	-9.1	-0.3	0.006399	-0.01874	24	0.3126	3.8303	7.74	0.00206	
							52	3.357	0.1	-1.2	0	0.000916	-0.002437	36	0.1315	3.0728	5.6	0.001017	
							52	3.357	-0.2	-1.2	0	0.000916	-0.003642	60	0.0174	2.709	2.48	0.000447	

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULI	POIS	DEF (in)	STRESS (psi)			DIST. (in)	RADIAL DISPL (in)	DEFLECT (mil)	STRESS	RADIAL STRAIN
								RADIAL	VERT	SHR					
481087	3	1	AC	7.3	179300	0.35	0	12.27	-101.5	-79.6	0	0	12.27	-112.32	-0.02036
	2	BASE	8.4	56600	0.35	7.3	10.53	35	-30.1	-4	8	0.9951	8.632	-16.71	-0.001312
	3	ROADBED	44.3	25600	0.35	15.7	7.848	5.9	-8.4	-0.6	12	0.9784	6.889	3.76	0.002364
481087							15.7	7.848	5.9	-8.4	18	0.7811	5.4623	4.25	0.003198
							15.7	7.848	0.4	-8.4	24	0.6081	4.4705	3.46	0.002666
											36	0.3232	3.3228	3.96	0.001937
481087	3	1	AC	7.1	273300	0.35	0	22.48	-162.8	-79.6	0	0	22.48	-182.43	-0.0278
	2	BASE	5.9	11600	0.35	7.1	21.46	122.2	-14.5	-5.6	8	1.5162	18.5615	-50.33	-0.006211
	3	ROADBED	47	11100	0.35	13	17.08	-0.5	-6.9	-0.2	12	1.6472	16.0975	-11.31	0.000403
481092							13	17.08	-0.5	-6.9	18	1.4461	13.1575	6.58	0.004496
							13	17.08	-0.5	-6.9	24	1.1589	10.8565	10.06	0.00488
											36	0.5922	7.9443	13.02	0.003859
481092	4	1	AC	3	1844100	0.31	0	15.62	-501.1	-79.6	0	0	15.62	-593.56	-0.01766
	2	BASE	5.5	16300	0.35	3	15.56	463	-29.8	-44.2	8	0.8039	12.3049	-95.19	-0.000255
	3	SUBBASE	7	54400	0.35	8.5	11.07	-6.4	-13.8	-0.5	12	0.7503	10.0915	38.14	0.003295
481094							8.5	11.07	-3.9	-13.8	18	0.4995	7.6379	72.32	0.003706
							15.5	9.737	5.2	-6.8	24	0.3393	6.0656	24.49	0.002148
							15.5	9.737	-0.4	-6.8	36	0.1358	4.3963	29.34	0.001207
481094	3	1	AC	1.7	1156200	0.3	0	9.03	-281.3	-79.6	0	0	9.03	-313.68	-0.01536
	2	BASE	8.5	99500	0.35	1.7	8.98	137	-77.5	-60.9	8	0.5428	5.4548	14.1	0.003258
	3	ROADBED	49.8	49700	0.45	10.2	5.627	9.6	-18.5	-1.6	12	0.4036	3.7592	45.28	0.003505
481096							10.2	5.627	-3.2	-18.5	18	0.2426	2.5828	19.03	0.001776
							10.2	5.627	-3.2	-18.5	24	0.1763	1.9493	3.73	0.000903
											36	0.0885	1.2781	7.67	0.000591
481096	4	1	AC	6.9	1970500	0.3	0	7.008	-199.3	-79.6	0	0	7.008	-211.24	-0.005722
	2	BASE	8.4	16600	0.35	6.9	6.867	172.4	-8.9	-10.1	8	0.3246	6.2804	-68.22	-0.001532
	3	SUBBASE	36	49600	0.45	15.3	4.945	-1.7	-4	0	12	0.3639	5.7713	-23.42	-0.000253
481096							15.3	4.945	-1.8	-4	18	0.3396	5.0848	5.01	0.000736
							15.3	4.945	-1.8	-4	24	0.2854	4.5057	14.01	0.001009
							51.3	3.903	0	-0.9	36	0.1554	3.713	22.39	0.00058
481096							51.3	3.903	-0.5	-0.9	60	0.0224	3.197	12.76	0.000588

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH [MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	DEF (in)	STRESS (psi)				RADIAL DISPL (in)	DEFLECT (mil)
								RADIAL	VERT	SHR	STRAIN		
481109		1	AC	6.5	1774700	0.3	0	17.12	-229.1	-79.6	0	0	17.12
		2	BASE	6.7	16000	0.2	6.5	16.98	201.1	-8.3	-11	0.4341	16.1724
		3	SUBBASE	36	16600	0.45	6.5	16.98	0.3	-8.3	-11	0.4948	15.4725
		4	ROADBED	20	5500	0.45	13.2	15.21	0.3	-3.2	-0.1	0.4758	14.4933
481111		1	AC	7.8	338700	0.35	0	13.68	-130	-79.6	0	0	13.68
		2	BASE	8.4	34800	0.35	7.8	12.77	79	-17.8	-4.7	0.8619	11.2575
		3	SUBBASE	36	19900	0.45	7.8	12.77	0.5	-17.8	-4.7	0.9261	9.8678
		4	ROADBED	20	11900	0.45	16.2	10.23	2.7	-5.7	-0.3	0.813	8.3788
481123		1	AC	4.3	1384900	0.3	0	5.092	-186.4	-79.6	0	0	5.092
		2	BASE	16.7	124100	0.35	4.3	4.962	125.7	-37	-18.7	0.3599	3.8916
		3	ROADBED	39	50900	0.35	4.3	4.962	-4.6	-37	-18.7	0.3284	3.1933
							21	2.985	4.1	-4.7	-0.2	0.2247	2.5253
481123		1	AC	3.7	2491300	0.3	0	5.174	-293.8	-79.6	0	0	5.174
		2	BASE	16.2	82300	0.35	3.7	5.115	247.9	-34.1	-31.4	0.3411	3.9602
		3	ROADBED	40.1	63100	0.35	3.7	5.115	-5.1	-34.1	-31.4	0.3176	3.1845
							19.9	2.699	0.9	-5.6	-0.2	0.212	2.3664
481130		1	AC	2.7	1057900	0.3	0	12.9	-346.3	-79.6	0	0	12.9
		2	BASE	18	39200	0.35	2.7	12.8	281.4	-50.3	-55.6	0.8319	8.8589
		3	SUBBASE	8	136000	0.2	2.7	12.8	-10.4	-50.3	-55.6	0.6669	6.5643
		4	ROADBED	31.3	23200	0.45	20.7	5.242	-3	-6.9	-0.4	0.3415	4.6344
481130		1	AC	28.7	4.906	0.2	28.7	4.906	6.2	-2.9	-0.4	0.0852	2.8708
		2	BASE	28.7	4.906	0.2	28.7	4.906	-0.7	-2.9	-0.4	0.0135	2.4958
		3	SUBBASE	28.7	4.906	0.2	28.7	4.906	-0.7	-2.9	-0.4	0.0135	2.4958
		4	ROADBED	28.7	4.906	0.2	28.7	4.906	-0.7	-2.9	-0.4	0.0135	2.4958

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH				MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	(in)	DEF (mil)	STRESS (psi)		STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN
									RADIAL	VERT	RADIAL	VERT					
481108	4	1	AC	6.5	1774700	0.3	0	17.12	-229.1	-79.6	0	-0.007539	0	0	17.12	-243.74	-0.007539
		2	BASE	6.7	16000	0.2	6.5	16.98	201.1	-8.3	-11	0.007939	0	0.4341	16.1724	-85.09	-0.002225
		3	SUBBASE	36	16600	0.45	6.5	16.98	0.3	-8.3	-11	0.007939	12	0.4948	15.4725	-34.23	-0.000569
		4	ROADBED	20	5500	0.45	13.2	15.21	0.3	-3.2	-0.1	0.005258	18	0.4758	14.4933	0.88	0.000787
481111							13.2	15.21	-1.1	-3.2	-0.1	0.005258	24	0.4121	13.6417	14.14	0.001263
							49.2	12.86	-0.2	-0.7	0	0.001223	36	0.2376	12.4208	28.57	0.001362
							49.2	12.86	-0.5	-0.7	0	0.001223	60	0.0362	11.5775	18.45	0.000912
481123	4	1	AC	7.8	338700	0.35	0	13.68	-130	-79.6	0	-0.01608	0	0	13.68	-144.51	-0.01608
		2	BASE	8.4	34800	0.35	7.8	12.77	79	-17.8	-4.7	0.01653	8	0.8619	11.2575	-35.11	-0.003225
		3	SUBBASE	36	19900	0.45	7.8	12.77	0.5	-17.8	-4.7	0.01653	12	0.9261	9.8678	-5.7	0.000389
		4	ROADBED	20	11900	0.45	16.2	10.23	2.7	-5.7	-0.3	0.0107	18	0.813	8.3788	4.05	0.002411
481123							16.2	10.23	-0.8	-5.7	-0.3	0.0107	24	0.6596	7.2263	6.36	0.002596
							52.2	6.495	-0.2	-1	0	0.001535	36	0.3562	5.7628	8.59	0.002137
							52.2	6.495	-0.5	-1	0	0.001535	60	0.0507	4.8483	5.29	0.001288
481123	3	1	AC	4.3	1384900	0.3	0	5.092	-186.4	-79.6	0	-0.007893	0	0	5.092	-207.71	-0.007893
		2	BASE	16.7	124100	0.35	4.3	4.962	125.7	-37	-18.7	0.00732	8	0.3599	3.8916	-24.14	0.00014
		3	ROADBED	39	50900	0.35	4.3	4.962	-4.6	-37	-18.7	0.00732	12	0.3284	3.1933	18.04	0.001523
							21	2.985	4.1	-4.7	-0.2	0.003323	18	0.2247	2.5253	19.35	0.001449
481123							21	2.985	0.2	-4.7	-0.2	0.003323	24	0.1611	2.1094	7.35	0.000848
													36	0.0811	1.6555	8.01	0.000516
													60	0.0123	1.3983	4.85	0.000311
481123	3	1	AC	3.7	2491300	0.3	0	5.174	-293.8	-79.6	0	-0.007398	0	0	5.174	-338.17	-0.007398
		2	BASE	16.2	82300	0.35	3.7	5.115	247.9	-34.1	-31.4	0.007312	8	0.3411	3.9602	-52.49	-0.000114
		3	ROADBED	40.1	63100	0.35	3.7	5.115	-5.1	-34.1	-31.4	0.007312	12	0.3176	3.1845	25.15	0.00142
							19.9	2.699	0.9	-5.6	-0.2	0.003025	18	0.212	2.3664	39.36	0.001548
481130							19.9	2.699	0	-5.6	-0.2	0.003025	24	0.1429	1.8541	16.25	0.000924
													36	0.0583	1.3254	15.04	0.000489
													60	0.0079	1.0728	5.85	0.000201
481130	4	1	AC	2.7	1057900	0.3	0	12.9	-346.3	-79.6	0	-0.02104	0	0	12.9	-402.59	-0.02104
		2	BASE	18	39200	0.35	2.7	12.8	281.4	-50.3	-55.6	0.01998	8	0.8319	8.8569	-15.09	0.002696
		3	SUBBASE	8	136000	0.2	2.7	12.8	-10.4	-50.3	-55.6	0.01998	12	0.8669	6.5643	61.94	0.005625
		4	ROADBED	31.3	23200	0.45	20.7	5.242	-3	-6.9	-0.4	0.001185	18	0.3415	4.6344	47.51	0.003976
481130							20.7	5.242	0.3	-6.9	-0.4	0.001185	24	0.2011	3.6931	6.61	0.001566
							28.7	4.906	6.2	-2.9	-0.4	0.004018	36	0.0852	2.8708	7.65	0.000647
							28.7	4.906	-0.7	-2.9	-0.4	0.004018	60	0.0135	2.4958	4.09	0.000338

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH				MECHANISTIC RESPONSES UNDER THE LOAD				RAD. DIST. (in)	MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	(in)	DEF (mil)	STRESS (psi)			STRAIN	RADIAL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN	RADIAL STRESS	RADIAL STRAIN
									RADIAL	VERT	SHR							
481174	4	1	AC	4.6	313900	0.33	0	25.44	-197.9	-79.6	0	-0.03486	0.01669	0	-228.79	-0.03486	-228.79	-0.03486
		2	BASE	13.2	25500	0.35	4.6	24.88	136.4	-32.7	-15.9	0.03333	-0.03797	8	1.6831	20.1985	-41.28	-0.002141
		3	SUBBASE	36	8200	0.45	4.6	24.88	-2.8	-32.7	-15.9	0.03333	-0.1082	12	1.6405	16.9725	7.23	0.004844
		4	ROADBED	20	8400	0.45	17.8	17.22	6.6	-4.9	-0.4	0.02293	-0.03715	18	1.2427	13.5625	16.67	0.006133
481174							17.8	17.22	-0.5	-4.9	-0.4	0.02293	-0.05387	24	0.9435	11.2175	8.88	0.00435
							53.8	9.406	-0.5	-1	0	0.002114	-0.00663	36	0.4903	8.4281	11.39	0.00306
							53.8	9.406	-0.5	-1	0	0.002114	-0.00669	60	0.0737	6.7553	6.9	0.00186
							0	15.79	-220.1	-79.6	0	-0.01807	0.01064	0	0	15.79	-259.29	-0.01807
482176	4	1	AC	4.6	674300	0.34	0	15.79	164.1	-29.5	-17.6	0.01794	-0.02038	8	0.8862	13.0566	-52.67	-0.001551
		2	BASE	13.2	40300	0.35	4.6	15.54	-2.7	-29.5	-17.6	0.01794	-0.05896	12	0.8782	11.3275	4.16	0.002313
		3	SUBBASE	36	15900	0.45	4.6	15.54	4.9	-5	-0.3	0.01186	-0.02061	18	0.6714	9.4084	19.38	0.003314
		4	ROADBED	20	10600	0.45	17.8	11.24	-0.5	-5	-0.3	0.01186	-0.0279	24	0.5056	8.0658	11.28	0.002438
482176							17.8	11.24	-0.3	-0.9	0	0.001426	-0.003876	36	0.2524	6.4826	13.76	0.001661
							53.8	7.196	-0.5	-0.9	0	0.001426	-0.004662	60	0.0372	5.5573	7.64	0.000939
							0	9.135	-117.7	-79.6	0	-0.0105	0.000737	0	0	9.135	-130.7	-0.0105
							2.2	9.059	-54.5	-72.6	-8.1	-0.002225	-0.007629	8	0.58	7.6212	-29.27	-0.002152
482176	4	1	AC	2.3	486100	0.33	0	9.455	-127	-79.6	0	-0.01249	0.001005	0	0	9.455	-141.45	-0.01249
		2	BASE	9.6	272400	0.2	2.3	9.348	-36.8	-71.9	-10.1	-0.000373	-0.01031	8	0.644	7.5601	-24.85	-0.001282
		3	SUBBASE	36	19800	0.45	2.3	9.348	-20.9	-71.9	-10.1	-0.000373	-0.02347	12	0.669	6.5773	-4.25	0.000156
		4	ROADBED	20	19300	0.45	11.9	8.061	39	-6.8	-2.9	0.0114	-0.008671	18	0.6274	5.6074	-0.56	0.000986
483669							11.9	8.061	-0.9	-6.8	-2.9	0.0114	-0.02747	24	0.5523	4.8071	3.76	0.001502
							47.9	4.239	-0.5	-1.1	0	0.001231	-0.003408	36	0.3418	3.6834	9.32	0.001741
							47.9	4.239	-0.5	-1.1	0	0.001231	-0.003588	60	0.0523	2.905	7.29	0.001319
							0	8.885	-200.5	-79.6	0	-0.0055	0.001953	0	0	8.885	-221.89	-0.0055
483669	4	1	AC	4.2	2162600	0.3	0	8.885	113.6	-38.4	-15.7	0.004314	-0.004799	8	0.2696	7.8848	-40.56	-0.000423
		2	BASE	7.6	234600	0.2	4.2	8.615	3.6	-38.4	-15.7	0.004314	-0.01617	12	0.2697	7.393	1.78	0.000497
		3	SUBBASE	8.2	130300	0.2	4.2	8.615	9.7	-8.5	-0.9	0.003978	-0.005287	18	0.2261	6.8473	8.95	0.000679
		4	ROADBED	40	11800	0.45	11.8	7.905	4.4	-8.5	-0.9	0.003978	-0.007844	24	0.191	6.4339	5.52	0.000571
483669							11.8	7.905	7.9	-1.7	-0.4	0.005073	-0.003779	36	0.1184	5.8656	14.47	0.000598
							20	7.507	-0.3	-1.7	-0.4	0.005073	-0.0124	60	0.0195	5.466	11.9	0.000488

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS		DEF (mil)	STRESS (psi)		SHR	STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN
									RADIAL	VERT		RADIAL	VERT					
483679	4	1	AC	1.4	773200	0.3	0	9.522	-132	-79.6	0	-0.009023	0.000496	0	0	9.522	-137.02	-0.009023
		2	BASE	8.7	708000	0.2	1.4	9.497	-84.1	-76.5	-10.1	-0.004661	-0.003204	8	0.5126	8.4049	-34.11	-0.00193
		3	SUBBASE	36	15400	0.45	1.4	9.497	-63.6	-76.5	-10.1	-0.004661	-0.007041	12	0.5691	7.7437	-14.23	-0.00068
		4	ROADBED	20	13900	0.45	10.1	8.992	77	-5.2	-6.2	0.008528	-0.00542	18	0.5648	6.9368	-2.11	0.000587
483779							10.1	8.992	-1.1	-5.2	-6.2	0.008528	-0.02163	24	0.5068	6.2158	5.34	0.001256
							46.1	5.649	-0.5	-1	0	0.001115	-0.003489	36	0.3187	5.1478	13.44	0.001601
							46.1	5.649	-0.5	-1	0	0.001115	-0.003738	60	0.0501	4.371	10.62	0.001257
484142	4	1	AC	8.4	5644600	0.15	0	6.156	-155.9	-79.6	0	-0.002087	-0.000519	0	0	6.156	-154.27	-0.002087
		2	BASE	6.2	18800	0.35	8.4	6.093	135	-2.7	-7.4	0.001996	-0.000798	8	0.1222	5.9295	-48.79	-0.000586
		3	SUBBASE	36	5600	0.45	8.4	6.093	-0.2	-2.7	-7.4	0.001996	-0.00692	12	0.1402	5.7725	-21.89	-0.000252
		4	ROADBED	20	18800	0.45	14.6	5.724	0	-1	0	0.002059	-0.005656	18	0.1431	5.5463	-0.57	9.1E-05
484142							14.6	5.724	-0.6	-1	0	0.002059	-0.008305	24	0.131	5.3354	12.09	0.000292
							50.6	3.939	-0.7	-0.8	0	-0.000405	-0.002911	36	0.0835	5.0112	26	0.000418
							50.6	3.939	-0.8	-0.8	0	-0.000405	-0.004411	60	0.0135	4.7683	19.51	0.000339
485154	4	1	AC	9.8	7535600	0.15	0	2.036	-106.5	-79.6	0	-0.001005	-0.000592	0	0	2.036	-104.2	-0.001005
		2	BASE	8.7	594200	0.3	9.8	1.98	68.3	-7.9	-4.5	0.000759	-0.000396	8	0.056	1.9234	-23.54	-0.000181
		3	SUBBASE	5.4	5400	0.35	9.8	1.98	3.5	-7.9	-4.5	0.000759	-0.001534	12	0.0612	1.8573	-7.82	-6.1E-05
		4	ROADBED	36.1	63200	0.45	18.5	1.893	7.6	-1.1	-0.1	0.000941	-0.000957	18	0.0611	1.7772	-0.03	4.5E-05
485154							18.5	1.893	-0.5	-1.1	-0.1	0.000941	-0.01297	24	0.056	1.7038	6.17	0.000117
							23.9	1.232	-0.5	-1	0	-3.1E-05	-0.01136	36	0.0371	1.5901	13.83	0.000173
							23.9	1.232	-0.9	-1	0	-3.1E-05	-0.003352	60	0.0061	1.5035	11.73	0.000153
485154	4	1	AC	8.3	5777200	0.15	0	3.147	-120.8	-79.6	0	-0.001532	-0.000699	0	0	3.147	-119.38	-0.001532
		2	BASE	4.4	965000	0.3	8.3	3.082	75.5	-11.6	-4.9	0.001114	-0.000614	8	0.0862	2.9761	-28.65	-0.000302
		3	SUBBASE	6	90100	0.2	8.3	3.082	10.5	-11.6	-4.9	0.001114	-0.001823	12	0.095	2.8693	-10.1	-0.000101
		4	ROADBED	41.3	29300	0.45	12.7	3.015	20.5	-2.7	-0.7	0.001583	-0.001591	18	0.0944	2.7322	0.97	8.3E-05
485154							12.7	3.015	1.2	-2.7	-0.7	0.001583	-0.003391	24	0.0859	2.6063	7.97	0.000192
							18.7	2.862	1.2	-1.4	-0.1	0.001396	-0.002077	36	0.0556	2.416	16.77	0.000269
							18.7	2.862	-0.4	-1.4	-0.1	0.001396	-0.003617	60	0.0091	2.2713	13.37	0.000227
485154	4	1	AC	8.1	4359500	0.15	0	2.778	-114.3	-79.6	0	-0.001907	-0.000975	0	0	2.778	-113.01	-0.001907
		2	BASE	4.4	976800	0.3	8.1	2.691	64.1	-14.5	-5	0.001267	-0.000797	8	0.1058	2.5626	-24.52	-0.000321
		3	SUBBASE	6	98100	0.2	8.1	2.691	11.7	-14.5	-5	0.001267	-0.002166	12	0.1148	2.4318	-7.21	-8.4E-05
		4	ROADBED	41.5	37300	0.45	12.5	2.612	24.4	-3.6	-0.9	0.00185	-0.001884	18	0.1123	2.2692	1.89	0.00012
485154							12.5	2.612	1.4	-3.6	-0.9	0.00185	-0.004042	24	0.1014	2.1233	7.5	0.000237
							18.5	2.432	1.5	-1.7	-0.1	0.001577	-0.002396	36	0.0651	1.9042	14.9	0.000318
							18.5	2.432	-0.3	-1.7	-0.1	0.001577	-0.003907	60	0.0106	1.74	11.74	0.000264

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)		MECHANISTIC RESPONSES UNDER THE LOAD								RAD. MECHANISTIC RESPONSE AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)	STRESS (psi)				STRAIN		RADIAL DIST. (in)	DEFLECTI (mil)		STRESS		
								RADIAL	VERT	SHR	RADIAL	VERT	RADIAL		STRAIN	RADIAL	STRAIN		
485336	4	1	AC	8.1	7315000	0.15	0	2.352	-138.9	-79.6	0	-0.001417	-0.000473	0	0	2.352	-137.43	-0.001417	
		2	BASE	6.1	217900	0.34	8.1	2.303	111.8	-7.4	-6.9	0.001284	-0.00058	8	0.0799	2.1931	-34.96	-0.000297	
		3	SUBBASE	36	79200	0.45	8.1	2.303	1.1	-7.4	-6.9	0.001284	-0.003193	12	0.0881	2.0887	-10.78	-7.5E-05	
		4	ROADBED	20	41800	0.45	14.2	2.154	2.6	-2.9	-0.2	0.001228	-0.002131	18	0.0853	1.9493	4.92	0.00012	
486086							14.2	2.154	-0.6	-2.9	-0.2	0.001228	-0.003011	24	0.0752	1.8268	11.76	0.000207	
							50.2	1.712	-0.4	-0.8	0	0.000135	-0.000473	36	0.0454	1.6457	19.62	0.000243	
							50.2	1.712	-0.5	-0.8	0	0.000135	-0.000697	60	0.0071	1.5185	13.34	0.000179	
	4	1	AC	9.8	895300	0.35	0	5.183	-115	-79.6	0	-0.005037	0.000532	0	0	5.183	-127.15	-0.005037	
		2	BASE	17.2	69500	0.35	9.8	4.767	65.5	-11.2	-3.8	0.005017	-0.006543	8	0.2786	4.4061	-32.1	-0.00125	
		3	SUBBASE	6	29700	0.2	9.8	4.767	0.3	-11.2	-3.8	0.005017	-0.01407	12	0.3104	3.9855	-8.51	-0.000231	
		4	ROADBED	27	27600	0.45	27	3.549	1.2	-2	-0.1	0.002148	-0.004146	18	0.2959	3.5363	-0.89	0.00048	
							27	3.549	0.3	-2	-0.1	0.002148	-0.007155	24	0.2577	3.1627	3.78	0.000748	
							33	3.181	0.2	-1.5	0	0.001574	-0.005311	36	0.1564	2.6454	8.21	0.000808	

Mechanistic responses - South West Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						RAD. MECHANISTIC RESPONSE AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)		STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN	
485336	4	1	AC	8.1	7315000	0.15	0	2.352	-138.9	-79.6	0	-0.001417	0	0	2.352	-137.43	-0.001417	
		2	BASE	6.1	217900	0.34	8.1	2.303	111.8	-7.4	-6.9	0.001284	8	0.0799	2.1931	-34.96	-0.000297	
		3	SUBBASE	36	79200	0.45	8.1	2.303	1.1	-7.4	-6.9	0.001284	12	0.0881	2.0887	-10.78	-7.5E-05	
		4	ROADBED	20	41800	0.45	14.2	2.154	2.6	-2.9	-0.2	0.001228	18	0.0853	1.9493	4.92	0.00012	
486086							14.2	2.154	-0.6	-2.9	-0.2	0.001228	24	0.0752	1.8268	11.76	0.000207	
							50.2	1.712	-0.4	-0.8	0	0.000135	36	0.0454	1.6457	19.62	0.000243	
							50.2	1.712	-0.5	-0.8	0	0.000135	60	0.0071	1.5185	13.34	0.000179	
		1	AC	9.8	895300	0.35	0	5.183	-115	-79.6	0	-0.005037	0	0	5.183	-127.15	-0.005037	
		2	BASE	17.2	69500	0.35	9.8	4.767	65.5	-11.2	-3.8	0.005017	8	0.2786	4.4061	-32.1	-0.00125	
		3	SUBBASE	6	29700	0.2	9.8	4.767	0.3	-11.2	-3.8	0.005017	12	0.3104	3.9855	-8.51	-0.000231	
		4	ROADBED	27	27600	0.45	27	3.549	1.2	-2	-0.1	0.002148	18	0.2959	3.5363	-0.89	0.00048	
							27	3.549	0.3	-2	-0.1	0.002148	24	0.2577	3.1627	3.78	0.000748	
							33	3.181	0.2	-1.5	0	0.001574	36	0.1564	2.6454	8.21	0.000808	

Mechanistic responses - North Central Region.

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSES AT DEPTH = 0.					
		TYPE	THICK	MODULU	POIS		STRESS (psi)			STRAIN		DIST. (in)	RADIAL		STRESS			
							DEF (mil)	RADIAL	VERT	SHR	RADIAL		VERT	DISPL	DEFLECTI (mil)	RADIAL	STRAIN	
171002	3	1	AC	13	821600	0.34	0	5.629	-103.6	-79.6	0	-0.004851	-0.000745	0	0	5.629	-112.57	-0.004851
		2	BASE	36	19400	0.45	13	5.075	54.7	-3.5	-2.9	0.004464	-0.005054	8	0.2732	4.8775	-27.93	-0.001285
		3	ROADBED	20	23200	0.45	13	5.075	-0.8	-3.5	-2.9	0.004464	-0.0114	12	0.3114	4.4955	-10.06	-0.00055
							49	3.292	-0.6	-0.9	0	0.000352	-0.001766	18	0.3222	4.1009	-5.44	7.3E-05
							49	3.292	-0.6	-0.9	0	0.000352	-0.001612	24	0.3026	3.7403	0.84	0.000546
														36	0.2067	3.1891	7.99	0.000913
														60	0.0338	2.7675	8.12	0.000846
171002	3	1	AC	13.4	643000	0.34	0	6.905	-97.6	-79.6	0	-0.00557	-0.001595	0	0	6.905	-106.04	-0.00557
		2	BASE	36	27300	0.45	13.4	6.178	46.1	-4.4	-2.5	0.004869	-0.005657	8	0.3056	5.9896	-23.53	-0.001258
		3	ROADBED	20	16600	0.45	13.4	6.178	-0.7	-4.4	-2.5	0.004869	-0.01192	12	0.3411	5.5467	-6.73	-0.000445
							49.4	4.477	-0.4	-0.9	0	0.000605	-0.001794	18	0.3457	5.122	-3.88	0.000163
							49.4	4.477	-0.5	-0.9	0	0.000605	-0.002346	24	0.321	4.7435	1.06	0.000629
														36	0.2161	4.1778	6.69	0.000974
														60	0.0349	3.7543	6.56	0.000875
175020	4	1	AC	8.7	1518200	0.15	0	6.107	-107.6	-79.6	0	-0.00508	-0.002928	0	0	6.107	-105.9	-0.00508
		2	BASE	4.4	237400	0.2	8.7	5.843	64.8	-12.1	-4	0.003644	-0.002169	8	0.278	5.5226	-20.73	-0.000725
		3	SUBBASE	36	32300	0.45	8.7	5.843	8	-12.1	-4	0.003644	-0.006223	12	0.2962	5.1798	-4.29	-9.4E-05
		4	ROADBED	20	17700	0.45	13.1	5.642	13.6	-3.9	-0.9	0.004895	-0.003981	18	0.283	4.7708	3.49	0.000414
							13.1	5.642	-0.3	-3.9	-0.9	0.004895	-0.0115	24	0.2497	4.4118	7.81	0.000671
							49.1	4.144	-0.4	-0.8	0	0.00051	-0.001466	36	0.1539	3.8881	13.03	0.000795
							49.1	4.144	-0.5	-0.8	0	0.00051	-0.002051	60	0.0241	3.513	9.39	0.000606
175151	4	1	AC	8.7	2664300	0.15	0	4.802	-92.4	-79.6	0	-0.002427	-0.001857	0	0	4.802	-91.06	-0.002427
		2	BASE	3.4	2857900	0.2	8.7	4.646	21.4	-16.5	-6	0.000752	-0.000887	8	0.1332	4.5253	-16.9	-0.000322
		3	SUBBASE	36	29300	0.35	8.7	4.646	22.8	-16.5	-6	0.000752	-0.000892	12	0.1428	4.3763	-5.41	-0.000118
		4	ROADBED	20	23800	0.35	12.1	4.617	64.2	-2.3	-5.3	0.001807	-0.001005	18	0.1433	4.2093	-0.78	8.2E-05
							12.1	4.617	-0.3	-2.3	-5.3	0.001807	-0.006567	24	0.1327	4.0534	4.75	0.000262
							48.1	3.471	-0.4	-0.8	0	8.9E-05	-0.001718	36	0.0889	3.8148	11.41	0.000407
							48.1	3.471	-0.4	-0.8	0	8.9E-05	-0.002102	60	0.0146	3.6315	9.87	0.000364
175453	4	1	AC	2.8	1221100	0.3	0	4.677	-62.5	-79.6	0	-0.001722	-0.00349	0	0	4.677	-68.01	-0.001722
		2	BASE	8.4	5207700	0.15	2.8	4.573	-46.9	-73.3	-5.9	-0.000939	-0.003878	8	0.1137	4.4074	-16.73	-0.000644
		3	SUBBASE	4.3	268500	0.3	2.8	4.573	-73.6	-73.3	-5.9	-0.000939	-0.000967	12	0.1358	4.282	-7.77	-0.000399
		4	ROADBED	44.5	18600	0.45	11.2	4.513	83.4	-4.2	-2.8	0.001326	-0.000612	18	0.1467	4.1423	-3.15	2E-06
							11.2	4.513	3.6	-4.2	-2.8	0.001326	-0.002103	24	0.138	4.002	1.18	0.000254
							15.5	4.434	6.3	-1.3	-0.3	0.001774	-0.001907	36	0.0929	3.78	5.43	0.000421
							15.5	4.434	-0.4	-1.3	-0.3	0.001774	-0.00488	60	0.0152	3.6067	5.13	0.00038

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH				MECHANISTIC RESPONSES UNDER THE LOAD						MECHANISTIC RESPONSES AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	(in)	DEF (mil)		STRESS (psi)		SHR		STRAIN		RADIAL DEFLECT (mil)	STRESS	RADIAL	STRAIN
175849	4	1	AC	7.2	5827200	0.15	0	6.514	-168.6	-79.6	0	-0.002185	0	-0.000408	0	6.514	-165.69	-0.002185	-0.002185
		2	BASE	4.3	402800	0.3	7.2	6.46	133.3	-8.8	-6.9	0.001921	8	6.2688	-50.35	-0.000576	-0.000576	-0.000576	
		3	SUBBASE	36	19100	0.45	7.2	6.46	7.9	-8.8	-6.9	0.001921	12	6.0958	-19.59	-0.000202	-0.000202	-0.000202	
		4	ROADBED	20	13200	0.45	11.5	6.348	15.6	-1.9	-0.8	0.002834	18	5.8488	2.79	0.000142	0.000142	0.000142	
176050							11.5	6.348	-0.5	-1.9	-0.8	0.002834	24	5.6248	13.82	0.000316	0.000316	0.000316	
							47.5	5.334	-0.6	-0.7	0	3.5E-05	36	5.2857	26.78	0.000413	0.000413	0.000413	
							47.5	5.334	-0.6	-0.7	0	3.5E-05	60	5.0365	18.94	0.000318	0.000318	0.000318	
	4	1	AC	4.8	1154300	0.3	0	7.666	-155.3	-79.6	0	-0.007373	0	7.666	-167.2	-0.007373	-0.007373	-0.007373	
176050		2	BASE	2.6	1098600	0.3	4.8	7.547	24.6	-34.9	-13.3	0.002538	8	6.7075	-45.84	-0.001621	-0.001621	-0.001621	
		3	SUBBASE	13.9	52900	0.35	4.8	7.547	25.6	-34.9	-13.3	0.002538	12	6.0945	-12.83	-0.000136	-0.000136	-0.000136	
		4	ROADBED	38.7	18300	0.45	7.4	7.404	112.3	-12.7	-10.1	0.007514	18	5.3334	3.72	0.000893	0.000893	0.000893	
							7.4	7.404	0.2	-12.7	-10.1	0.007514	24	4.7013	8.68	0.001143	0.001143	0.001143	
176050							21.3	5.76	2.6	-2.5	-0.1	0.004738	36	3.8318	14.83	0.001132	0.001132	0.001132	
							21.3	5.76	-0.4	-2.5	-0.1	0.004738	60	3.243	10.14	0.000779	0.000779	0.000779	
	4	1	AC	4.4	997100	0.3	0	9.373	-151.1	-79.6	0	-0.008229	0	9.373	-161.85	-0.008229	-0.008229	-0.008229	
		2	BASE	2.4	1112200	0.3	4.4	9.251	11.8	-39.6	-14.8	0.002152	8	8.2918	-40.5	-0.001553	-0.001553	-0.001553	
179267		3	SUBBASE	14	74800	0.35	4.4	9.251	17.9	-39.6	-14.8	0.002152	12	7.6172	-9.04	5E-05	5E-05	5E-05	
		4	ROADBED	39.2	13200	0.45	6.8	9.112	114.3	-17.6	-12.2	0.007687	18	6.8088	4.71	0.00104	0.00104	0.00104	
							6.8	9.112	0.3	-17.6	-12.2	0.007687	24	6.1523	7.65	0.0012	0.0012	0.0012	
							20.8	7.512	5.7	-2.3	-0.2	0.0059	36	5.2559	13.08	0.001172	0.001172	0.001172	
179267							20.8	7.512	-0.4	-2.3	-0.2	0.0059	60	4.6453	9.49	0.000847	0.000847	0.000847	
	4	1	AC	8.6	3200100	0.15	0	5.595	-115.4	-79.6	0	-0.002619	0	5.595	-113.83	-0.002619	-0.002619	-0.002619	
		2	BASE	4.2	706500	0.3	8.6	5.473	67.2	-11.1	-4.5	0.001791	8	5.3039	-27.24	-0.000512	-0.000512	-0.000512	
		3	SUBBASE	36	19800	0.35	8.6	5.473	13.6	-11.1	-4.5	0.001791	12	5.1253	-9.86	-0.000184	-0.000184	-0.000184	
181037		4	ROADBED	20	22000	0.35	12.8	5.375	26.9	-2.1	-1.3	0.002747	18	4.8968	0.26	0.000125	0.000125	0.000125	
							12.8	5.375	-0.2	-2.1	-1.3	0.002747	24	4.6885	7.38	0.000323	0.000323	0.000323	
							48.8	3.777	-0.4	-0.8	0	2.7E-05	36	4.3677	15.99	0.000464	0.000464	0.000464	
							48.8	3.777	-0.4	-0.8	0	2.7E-05	60	4.1253	12.88	0.000395	0.000395	0.000395	
181037	3	1	AC	14.1	1491100	0.3	0	4.131	-96	-79.6	0	-0.002809	0	4.131	-100.39	-0.002809	-0.002809	-0.002809	
		2	BASE	36	21200	0.45	14.1	3.801	48.4	-2.2	-2.6	0.002287	8	3.7203	-21.8	-0.000537	-0.000537	-0.000537	
		3	ROADBED	20	26200	0.45	14.1	3.801	-0.7	-2.2	-2.6	0.002287	12	3.5193	-7.57	-0.000237	-0.000237	-0.000237	
							50.1	2.809	-0.6	-0.8	0	4.6E-05	18	3.3189	-4.77	1.8E-05	1.8E-05	1.8E-05	
							50.1	2.809	-0.6	-0.8	0	4.6E-05	24	3.1348	0.74	0.00027	0.00027	0.00027	
							50.1	2.809	-0.6	-0.8	0	4.6E-05	36	2.8459	7.65	0.000499	0.000499	0.000499	
							60	0.0196	2.6192	8.11			60	0.0196	2.6192	8.11	0.000489	0.000489	

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD										RAD. MECHANISTIC RESPONSES AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULU	POIS	DEF (mil)	STRESS (psi)		SHR	STRAIN		VERT	DIST. (in)	RAD. DEFLECT (mil)	STRESS	RADIAL STRAIN	RADIAL STRESS	RADIAL STRAIN
								RADIAL	VERT		RADIAL	VERT							
183031	4	1	AC	10.4	493800	0.15	0	5.015	-110.6	-79.6	0	-0.001617	-0.000884	0	0	5.015	-109.15	-0.001617	-0.001617
		2	BASE	4.4	45800	0.35	10.4	4.928	81.9	-3.1	-2.9	0.001387	-0.00059	8	0.0914	4.8367	-26.2	-0.000319	-0.000319
		3	SUBBASE	36	45900	0.45	10.4	4.928	-0.4	-3.1	-2.9	0.001387	-0.004865	12	0.101	4.7293	-10.02	-0.000126	-0.000126
		4	ROADBED	20	15900	0.45	14.8	4.746	-0.4	-1.9	0	0.000927	-0.003533	18	0.1018	4.5946	-0.29	6.9E-05	6.9E-05
195042							14.8	4.746	-0.8	-1.9	0	0.000927	-0.002607	24	0.0933	4.4697	7.15	0.000201	0.000201
							50.8	4.324	-0.4	-0.6	0	8.7E-05	-0.000526	36	0.0608	4.2778	15.43	0.000291	0.000291
							50.8	4.324	-0.5	-0.6	0	8.7E-05	-0.00121	60	0.0099	4.1345	12.44	0.000247	0.000247
							0	7.814	-146	-79.6	0	-0.002452	-0.000726	0	0	7.814	-144.68	-0.002452	-0.002452
201005							8.1	7.736	110.2	-6.8	-5.7	0.002071	-0.000925	8	0.1424	7.547	-43.07	-0.000639	-0.000639
							8.1	7.736	9.6	-6.8	-5.7	0.002071	-0.003198	12	0.1618	7.3648	-18.8	-0.00027	-0.00027
							12.2	7.613	18.1	-1.2	-0.8	0.003024	-0.003483	18	0.1648	7.1101	-0.68	0.000102	0.000102
							12.2	7.613	-0.6	-1.2	-0.8	0.003024	-0.01165	24	0.1513	6.8719	10.45	0.000325	0.000325
201009							48.2	5.247	-0.7	-0.8	0	-0.000562	-0.00389	36	0.0978	6.5039	23.42	0.000478	0.000478
							48.2	5.247	-0.8	-0.8	0	-0.000562	-0.000506	60	0.016	6.2247	18.29	0.000401	0.000401
							0	6.633	-100.2	-79.6	0	-0.003813	-0.001428	0	0	6.633	-104.62	-0.003813	-0.003813
							13.5	6.223	53.9	-2.2	-2.9	0.003236	-0.00303	8	0.2132	6.0903	-25.27	-0.000859	-0.000859
201010							13.5	6.223	-0.7	-2.2	-2.9	0.003236	-0.008911	12	0.2393	5.8157	-9.56	-0.000391	-0.000391
							49.5	4.798	-0.6	-0.8	0	4.2E-05	-0.001519	18	0.2487	5.5281	-5.4	1.8E-05	1.8E-05
							49.5	4.798	-0.6	-0.8	0	4.2E-05	-0.001403	24	0.2361	5.2599	0.87	0.000383	0.000383
							0	6.916	-110.4	-79.6	0	-0.004757	-0.000944	36	0.1649	4.8413	8.47	0.000704	0.000704
201009							0	6.916	-110.4	-79.6	0	-0.004757	-0.000944	60	0.0275	4.514	8.94	0.000687	0.000687
							11.7	6.513	67.4	-3.8	-4.1	0.004366	-0.004231	0	0	6.916	-115.44	-0.004757	-0.004757
							11.7	6.513	-0.3	-3.8	-4.1	0.004366	-0.01454	8	0.2701	6.2707	-31.02	-0.001213	-0.001213
							11.7	6.513	-0.3	-3.8	-4.1	0.004366	-0.01454	12	0.3063	5.9178	-12.2	-0.0005	-0.0005
201010							47.7	4.144	-0.4	-0.9	0	0.000312	-0.003125	18	0.3136	5.5169	-4.8	0.000138	0.000138
							47.7	4.144	-0.4	-0.9	0	0.000312	-0.003013	24	0.2907	5.1521	2.41	0.000579	0.000579
							0	11.12	-145.3	-79.6	0	-0.01262	0.005176	36	0.1941	4.5915	10.22	0.00089	0.00089
							0	11.12	-145.3	-79.6	0	-0.01262	0.005176	60	0.0315	4.1682	9.54	0.000787	0.000787
201010							8.6	10.48	105.8	-8.7	-7.7	0.01362	-0.01647	0	0	11.12	-161.43	-0.01262	-0.01262
							8.6	10.48	-1.8	-8.7	-7.7	0.01362	-0.03459	8	0.7206	9.3796	-48.75	-0.003661	-0.003661
							8.6	10.48	-0.5	-1.3	0	0.001858	-0.005201	12	0.8188	8.3	-17.3	-0.000893	-0.000893
							44.6	5.087	-0.5	-1.3	0	0.001858	-0.005106	18	0.7864	6.9673	-1.1	0.001319	0.001319
201010							44.6	5.087	-0.5	-1.3	0	0.001858	-0.005106	24	0.6785	5.83	6.62	0.002105	0.002105
							0	11.12	-145.3	-79.6	0	-0.01262	0.005176	36	0.3959	4.2383	13.38	0.002191	0.002191
							0	11.12	-145.3	-79.6	0	-0.01262	0.005176	60	0.0598	3.1525	9.25	0.001485	0.001485
							0	11.12	-145.3	-79.6	0	-0.01262	0.005176	0	0	11.12	-161.43	-0.01262	-0.01262

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD							RAD. MECHANISTIC RESPONSES AT DEPTH = 0.						
		NO.	TYPE	THICK	MODULU	POIS	DEPTH (in)	DEF (mil)	STRESS (psi)		SHR	STRAIN		DIST. (in)	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN	
									RADIAL	VERT		RADIAL	VERT						
201010	3	1	AC	9	1759900	0.3	0	6.261	-145.1	-79.6	0	-0.004297	0.000655	0	0	6.261	-152.65	-0.004297	
	2	BASE	36	28200	0.45	9	6.06	110	-5.6	-8.2	0.004364	-0.004197	8	0.2495	5.7219	-48.63	-0.001269		
	3	ROADBED	20	17600	0.45	9	6.06	-1.2	-5.6	-8.2	0.004364	-0.01126	12	0.2862	5.379	-20.39	-0.000451		
						45	4.303	-0.4	-0.9	0	0.000732	-0.002052	18	0.2861	4.9331	-3.66	0.000282		
203015							45	4.303	-0.5	-0.9	0	0.000732	-0.002568	24	0.2567	4.5324	6.15	0.000642	
														36	0.1605	3.939	15.9	0.000812	
														60	0.0252	3.5073	12.58	0.000634	
204052	4	1	AC	9.3	2587900	0.15	0	5.369	-100.7	-79.6	0	-0.002746	-0.001797	0	0	5.369	-98.71	-0.002746	
	2	BASE	4	467200	0.35	9.3	5.206	57.7	-10.9	-3.1	0.001894	-0.001143	8	0.1491	5.0515	-18.23	-0.000355		
	3	SUBBASE	36	67700	0.45	9.3	5.206	8	-10.9	-3.1	0.001894	-0.003453	12	0.158	4.8718	-3.39	-3.8E-05		
	4	ROADBED	20	15700	0.45	13.3	5.086	14.8	-4	-0.8	0.002348	-0.003088	18	0.1511	4.6636	2.81	0.00021		
204052							13.3	5.086	-0.2	-4	-0.8	0.002348	-0.005484	24	0.134	4.4829	6.88	0.000349	
							49.3	4.395	-0.1	-0.7	0	0.000316	-0.000776	36	0.0836	4.216	11.72	0.000423	
							49.3	4.395	-0.4	-0.7	0	0.000316	-0.001636	60	0.0132	4.0245	8.73	0.000331	
204052	4	1	AC	8.6	1246700	0.15	0	8.597	-102.5	-79.6	0	-0.005858	-0.003705	0	0	8.597	-101.02	-0.005858	
	2	BASE	3.6	531100	0.2	8.6	8.273	45.8	-14.3	-4.5	0.003204	-0.002327	8	0.3229	7.9289	-20.21	-0.000874		
	3	SUBBASE	36	18900	0.35	8.6	8.273	17.8	-14.3	-4.5	0.003204	-0.003982	12	0.3471	7.5445	-5.72	-0.000234		
	4	ROADBED	20	14900	0.35	12.2	8.155	36.2	-3.3	-2.6	0.005555	-0.003406	18	0.341	7.0876	1.2	0.000339		
204052							12.2	8.155	0	-3.3	-2.6	0.005555	-0.01664	24	0.3084	6.6752	6.55	0.000717	
							48.2	5.657	-0.3	-0.8	0	0.00042	-0.003178	36	0.198	6.0547	12.91	0.000966	
							48.2	5.657	-0.4	-0.8	0	0.00042	-0.003963	60	0.0317	5.5948	10.11	0.000795	
204052	4	1	AC	9.7	4428900	0.15	0	6.608	-108.5	-79.6	0	-0.001749	-0.000893	0	0	6.608	-106.31	-0.001749	
	2	BASE	4.4	448200	0.2	9.7	6.513	70.6	-7.2	-3.1	0.001335	-0.00068	8	0.0979	6.4124	-24.81	-0.000326		
	3	SUBBASE	36	42400	0.35	9.7	6.513	5.9	-7.2	-3.1	0.001335	-0.001994	12	0.1073	6.296	-8.32	-0.00011		
	4	ROADBED	20	14100	0.35	14.1	6.447	9.6	-2.3	-0.6	0.001813	-0.001385	18	0.107	6.1515	0.36	8.6E-05		
204054							14.1	6.447	0	-2.3	-0.6	0.001813	-0.005359	24	0.0975	6.0203	6.89	0.000216	
							50.1	5.638	-0.3	-0.7	0	0.000147	-0.001136	36	0.0633	5.8191	14.43	0.000304	
							50.1	5.638	-0.3	-0.7	0	0.000147	-0.003112	60	0.0103	5.6885	11.6	0.000257	
204054	4	1	AC	9.6	2496700	0.15	0	4.209	-103.6	-79.6	0	-0.002938	-0.001821	0	0	4.209	-101.41	-0.002938	
	2	BASE	3.5	209900	0.2	9.6	4.039	67.7	-8.3	-2.5	0.002277	-0.001217	8	0.1605	3.8716	-19.85	-0.000419		
	3	SUBBASE	36	65600	0.45	9.6	4.039	4.1	-8.3	-2.5	0.002277	-0.004448	12	0.171	3.6763	-4	-5.4E-05		
	4	ROADBED	20	22800	0.45	13.1	3.914	5.6	-4.2	-0.5	0.002521	-0.003079	18	0.1634	3.4473	3.23	0.000237		
204054							13.1	3.914	-0.4	-4.2	-0.5	0.002521	-0.005959	24	0.1441	3.2477	7.56	0.000391	
							49.1	3.132	-0.2	-0.7	0	0.000341	-0.000854	36	0.0885	2.9573	12.33	0.000459	
							49.1	3.132	-0.5	-0.7	0	0.000341	-0.001423	60	0.0138	2.7498	8.83	0.000347	

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH				MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSES AT DEPTH = 0.			
		NO.	TYPE	THICK	MODULI	POIS	(in)	DEF. STRESS (psi)		SHR	STRAIN		DIST. (in)	RADIAL DISPL. (in)	DEFLECT. (mil)	RADIAL STRESS	RADIAL STRAIN
								RADIAL	VERT		RADIAL	VERT					
211034	3	1	AC	14.1	662800	0.3	0	5.722	-88.9	-79.6	0	-0.005576	0	0	5.722	-93	-0.005576
		2	BASE	36	36500	0.45	14.1	4.963	38	-4.5	0	0.004149	8	0.2942	4.8433	-15.95	-0.000645
		3	ROADBED	20	20900	0.45	14.1	4.963	-0.7	-4.5	-2.3	0.004149	12	0.3102	4.4372	-2.84	-0.000107
							50.1	3.559	-0.3	-0.9	0	0.000527	18	0.3045	4.0782	-2.02	0.000238
216040							50.1	3.559	-0.5	-0.9	0	0.000527	24	0.2796	3.7641	1.53	0.000585
													36	0.1861	3.2992	5.9	0.000853
													60	0.0299	2.9573	5.51	0.000749
261012	4	1	AC	7.6	470000	0.3	0	11.81	-158.9	-79.6	0	-0.01794	0	0	11.81	-167.21	-0.01794
		2	BASE	16	12800	0.35	7.6	11.15	123.9	-11.3	-8.5	0.01865	8	1.0017	9.4756	-48.48	-0.004277
		3	SUBBASE	36	13100	0.45	7.6	11.15	-0.9	-11.3	-8.5	0.01865	12	1.1053	7.9702	-13.88	-0.000403
		4	ROADBED	20	43800	0.45	23.6	5.307	-0.2	-3	-0.1	0.007222	18	1.0161	6.0817	4.57	0.002381
261012							23.6	5.307	-0.8	-3	-0.1	0.007222	24	0.8477	4.5218	10.37	0.003066
							59.6	1.91	-0.9	-1.2	0	0.000389	36	0.4623	2.4221	15.39	0.002813
							59.6	1.91	-0.6	-1.2	0	0.000389	60	0.066	1.071	8.95	0.001675
261012	4	1	AC	5.9	635300	0.34	0	10.48	-146.8	-79.6	0	-0.01126	0	0	10.48	-170.05	-0.01126
		2	BASE	6.5	115600	0.35	5.9	10.14	76	-28.5	-6.6	0.009801	8	0.5938	8.849	-42.13	-0.002033
		3	SUBBASE	13.2	27700	0.35	5.9	10.14	3.1	-28.5	-6.6	0.009801	12	0.6318	7.8665	-7.03	0.000373
		4	ROADBED	34.4	14800	0.45	12.4	8.976	16.1	-7.3	-0.8	0.01116	18	0.5553	6.7638	4.18	0.00151
261012							12.4	8.976	1	-7.3	-0.8	0.01116	24	0.4626	5.901	6.16	0.001583
							25.6	6.808	1.1	-2.2	-0.1	0.005309	36	0.2684	4.7557	10.88	0.001469
							25.6	6.808	-0.4	-2.2	-0.1	0.005309	60	0.0412	3.9902	7.91	0.001037
261013	4	1	AC	6.1	970700	0.35	0	13.39	-211.8	-79.6	0	-0.01117	0	0	13.39	-239.39	-0.01117
		2	BASE	3	25900	0.35	6.1	13.16	174.5	-13.9	-7	0.01208	8	0.6105	11.8527	-70.68	-0.002536
		3	SUBBASE	29.9	25700	0.35	6.1	13.16	-1.4	-13.9	-7	0.01208	12	0.6655	10.8075	-18.51	0.000116
		4	ROADBED	21	9900	0.45	9.1	12.1	-0.9	-8.5	-0.3	0.009235	18	0.5863	9.4728	9.02	0.001775
261013							9.1	12.1	-0.9	-8.5	-0.3	0.009235	24	0.4735	8.4129	13.31	0.001923
							39	8.163	0.6	-1.2	0	0.003003	36	0.2461	7.0408	19.19	0.001578
							39	8.163	-0.4	-1.2	0	0.003003	60	0.0352	6.1923	10.57	0.000891
261013	4	1	AC	6.6	641900	0.35	0	10.65	-158.8	-79.6	0	-0.01151	0	0	10.65	-177.42	-0.01151
		2	BASE	5	121600	0.35	6.6	10.29	90.7	-20.9	-6	0.01019	8	0.6388	9.0472	-50.84	-0.002873
		3	SUBBASE	16.1	12900	0.35	6.6	10.29	8.7	-20.9	-6	0.01019	12	0.7098	8.036	-15.59	-0.000376
		4	ROADBED	32.3	21600	0.35	11.6	9.417	23.9	-5.7	-1.1	0.01431	18	0.6622	6.7993	0.77	0.001331
							11.6	9.417	0	-5.7	-1.1	0.01431	24	0.5653	5.7687	6.95	0.001809
							27.7	5.469	-0.7	-2.3	0	0.00272	36	0.328	4.3402	14.01	0.001829
							27.7	5.469	-0.3	-2.3	0	0.00272	60	0.049	3.3727	9.6	0.001237

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION			DEPTH MECHANISTIC RESPONSES UNDER THE LOAD					RAD. MECHANISTIC RESPONSES AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULU	POIS	DEPTH (in)	STRESS (psi)			DIST. (in)	DEFLECTI (mil)		
								RADIAL	VERT	SHR		RADIAL	STRESS	RADIAL STRAIN
261013	4	1	AC	6.7	593900	0.35	0	11.33	-161.2	-79.6	0	0.06723	0.006723	-0.01267
		2	BASE	4.8	49900	0.35	6.7	10.9	111.4	-18.1	-5.4	0.01306	-0.01684	-0.002561
		3	SUBBASE	18.6	25400	0.35	6.7	10.9	1.4	-18.1	-5.4	0.01306	-0.03431	0.000348
		4	ROADBED	29.9	17900	0.35	11.5	9.6	4.7	-8.3	-0.5	0.01188	-0.02321	0.002007
263068							11.5	9.6	0.3	-8.3	-0.5	0.01188	-0.03316	0.002029
							30.1	6.375	0.3	-2.2	0	0.00382	-0.009516	0.001684
							30.1	6.375	-0.1	-2.2	0	0.00382	-0.01184	0.000973
							0	3.588	-123	-79.6	0	-0.001725	-0.000759	-0.001725
269029	4	1	AC	9	5213700	0.15	0	4.75	-87.6	-79.6	0	0.001715	-0.001715	-0.002041
		2	BASE	4.4	528700	0.35	9	3.513	85.6	-6.9	-4.1	0.001379	-0.000655	-0.000389
		3	SUBBASE	36	16300	0.35	9	3.513	7.9	-6.9	-4.1	0.001379	-0.002232	-0.000156
		4	ROADBED	20	46300	0.35	13.4	3.424	14.7	-1.6	-0.6	0.001908	-0.002268	7.2E-05
269029							13.4	3.424	-0.3	-1.6	-0.6	0.001908	-0.002598	0.000217
							49.4	1.831	-0.5	-0.8	0	-0.000104	-0.002927	0.000332
							49.4	1.831	-0.5	-0.8	0	-0.000104	-0.000963	0.000273
							0	4.75	-87.6	-79.6	0	-0.002041	-0.001715	-0.002041
269029	4	1	AC	7.2	2955500	0.15	0	4.75	-87.6	-79.6	0	0.001238	-0.001238	-0.000169
		2	BASE	8.2	1771600	0.15	7.2	4.619	14.2	-32	-5.2	0.000566	-0.001881	-2.7E-05
		3	SUBBASE	15	7100	0.35	7.2	4.619	6.2	-32	-5.2	0.000566	-0.001881	-2.7E-05
		4	ROADBED	29.6	23100	0.45	15.4	4.542	32.4	-1.3	-1.5	0.001539	-0.000631	6.9E-05
269029							15.4	4.542	-0.4	-1.3	-1.5	0.001539	-0.01078	0.000185
							30.4	3.227	-0.5	-0.8	0	-0.000138	-0.007196	0.000311
							30.4	3.227	-0.7	-0.8	0	-0.000138	-0.00727	0.000301
							0	3.532	-83.5	-79.6	0	-0.001847	-0.001691	-0.001847
269030	4	1	AC	7.4	3075800	0.15	0	3.532	-83.5	-79.6	0	0.000443	-0.00115	-0.000121
		2	BASE	7.9	2140700	0.15	7.4	3.402	10.5	-31.9	-4.8	0.000443	-0.00115	-0.000121
		3	SUBBASE	12	27200	0.35	7.4	3.402	5.5	-31.9	-4.8	0.000443	-0.001545	-7E-06
		4	ROADBED	32.7	25900	0.45	15.3	3.339	32.9	-1.8	-1.6	0.001295	-0.00055	6.4E-05
269030							15.3	3.339	-0.3	-1.8	-1.6	0.001295	-0.004797	0.000165
							27.3	2.926	-0.3	-0.9	0	0.000382	-0.002555	0.000274
							27.3	2.926	-0.6	-0.9	0	0.000382	-0.0016	0.000265
							0	5.063	-99.5	-79.6	0	-0.001324	-0.000879	-0.001324
269030	4	1	AC	7	5303700	0.15	0	5.063	-99.5	-79.6	0	0.000584	-0.000741	-0.000138
		2	BASE	9.1	1816800	0.15	7	4.994	32.1	-29.1	-6.2	0.000584	-0.001684	-0.000138
		3	SUBBASE	31.4	5200	0.35	7	4.994	7.5	-29.1	-6.2	0.000584	-0.001684	-1.2E-05
		4	ROADBED	20	50700	0.35	16.1	4.923	24.8	-1.1	-1.3	0.001146	-0.000473	6.8E-05
269030							16.1	4.923	-0.4	-1.1	-1.3	0.001146	-0.01226	0.00013
							47.5	1.685	-0.4	-0.8	0	-0.000231	-0.009188	0.00002
							47.5	1.685	-0.6	-0.8	0	-0.000231	-0.000715	0.000188

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSES AT DEPTH = 0.						
		NO.	TYPE	THICK	MODULU	POIS	DEPTH (in)		DEF (mil)		STRESS (psi)		STRAIN		DIST. (in)	RADIAL		DEFLECTII (mil)		STRESS		RADIAL STRAIN
271016	4	1	AC	3.3	1586600	0.3	0	14.18	-411	-79.6	0	-0.01683	0.01111	0	0	0	14.18	-476.81	-0.01683	-0.01683	-0.01683	-0.01683
		2	BASE	6	20200	0.35	3.3	14.1	376.7	-28.6	-34	0.01717	-0.01617	8	0.7706	11.2154	-74.14	-0.00217	-0.00217	-0.00217	-0.00217	
		3	SUBBASE	36	35000	0.35	3.3	14.1	-6.1	-28.6	-34	0.01717	-0.08345	12	0.7152	9.2465	36.67	0.003328	0.003328	0.003328	0.003328	
		4	ROADBED	20	18000	0.35	9.3	10	-4.4	-13.3	-0.3	0.008696	-0.04988	18	0.4629	7.1183	63.36	0.00374	0.00374	0.00374	0.00374	
271018							45.3	5.293	0.4	-1.4	0	0.001978	-0.004544	36	0.1059	4.4981	21.7	0.001064	0.001064	0.001064	0.001064	
	4	1	AC	4.5	650600	0.33	0	20.7	-241.8	-79.6	0	-0.02149	0.01254	0	0	0	20.7	-281.76	-0.02149	-0.02149	-0.02149	
		2	BASE	4	29700	0.35	4.5	20.44	194.2	-25.3	-11.6	0.02181	-0.02323	8	1.0517	17.4499	-56.51	-0.001713	-0.001713	-0.001713	-0.001713	
		3	SUBBASE	36	21900	0.35	4.5	20.44	-2.3	-25.3	-11.6	0.02181	-0.07116	12	1.0343	15.3275	7.2	0.003041	0.003041	0.003041	0.003041	
271019							8.5	18.08	1.2	-13.8	-0.7	0.01871	-0.04902	18	0.7641	12.9675	26.81	0.004385	0.004385	0.004385	0.004385	
							8.5	18.08	-0.8	-13.8	-0.7	0.01871	-0.05913	24	0.5464	11.3525	15.41	0.003137	0.003137	0.003137	0.003137	
							44.5	10.76	0.5	-1.2	0	0.003218	-0.006588	36	0.237	9.5717	15.13	0.001856	0.001856	0.001856	0.001856	
	4	1	AC	3.6	637000	0.35	0	14.99	-248.2	-79.6	0	-0.02152	0.01566	0	0	0	14.99	-312.52	-0.02152	-0.02152	-0.02152	
271019							3.6	14.8	179.5	-40	-16.5	0.02039	-0.02642	8	0.9738	11.3375	-49.34	-7.4E-05	-7.4E-05	-7.4E-05	-7.4E-05	
		2	BASE	6.3	47100	0.35	3.6	14.8	-4.5	-40	-16.5	0.02039	-0.06906	12	0.8975	9.1143	19.3	0.004169	0.004169	0.004169	0.004169	
		3	SUBBASE	36	24300	0.35	3.6	14.8	6.7	-14.3	-1	0.01952	-0.04024	18	0.6022	6.9078	27.55	0.004186	0.004186	0.004186	0.004186	
		4	ROADBED	20	20700	0.35	9.9	11.57	0.1	-14.3	-1	0.01952	-0.05728	24	0.4148	5.5382	11.47	0.002533	0.002533	0.002533	0.002533	
271019							45.9	4.705	-0.1	-1.5	0	0.001766	-0.005259	36	0.1804	4.1102	11.55	0.001395	0.001395	0.001395	0.001395	
	4	1	AC	3.6	754000	0.35	0	15.18	-276.2	-79.6	0	-0.02061	0.01601	0	0	0	15.18	-349.65	-0.02061	-0.02061	-0.02061	
		2	BASE	6.3	36200	0.35	3.6	15	219.5	-36.4	-18.5	0.02056	-0.02554	8	0.9319	11.6351	-56.28	-4.8E-05	-4.8E-05	-4.8E-05	-4.8E-05	
		3	SUBBASE	36	28100	0.35	3.6	15	-5.3	-36.4	-18.5	0.02056	-0.07539	12	0.8549	9.4555	23.05	0.004199	0.004199	0.004199	0.004199	
271019							9.9	11.42	1.2	-14.5	-0.7	0.01592	-0.04219	18	0.5553	7.2599	34.62	0.004254	0.004254	0.004254	0.004254	
		4	ROADBED	20	17900	0.35	9.9	11.42	-0.6	-14.5	-0.7	0.01592	-0.04914	24	0.3682	5.9303	13.61	0.002464	0.002464	0.002464	0.002464	
							45.9	5.335	0.1	-1.4	0	0.001961	-0.004932	36	0.1494	4.6003	12.3	0.00124	0.00124	0.00124	0.00124	
	4	1	AC	4.6	611300	0.33	0	14.53	-210.2	-79.6	0	-0.01933	0.006908	60	0.0244	3.3958	5.01	0.000623	0.000623	0.000623	0.000623	
271019							4.6	14.23	164.6	-28.6	-13.9	0.02005	-0.02192	8	0.9119	11.5823	-39.81	-0.000593	-0.000593	-0.000593	-0.000593	
	4	1	AC	4.6	611300	0.33	0	14.53	-210.2	-79.6	0	-0.01933	0.009872	0	0	0	14.53	-244.63	-0.01933	-0.01933	-0.01933	
		2	BASE	6.6	31400	0.35	4.6	14.23	164.6	-28.6	-13.9	0.02005	-0.02192	8	0.9119	11.5823	-39.81	-0.000593	-0.000593	-0.000593	-0.000593	
		3	SUBBASE	36	35300	0.35	4.6	14.23	-4	-28.6	-13.9	0.02005	-0.07195	12	0.8593	9.7625	15.24	0.003578	0.003578	0.003578	0.003578	
271019							11.2	10.74	-1.7	-12.8	-0.4	0.01056	-0.03655	18	0.5831	7.8981	26.06	0.004178	0.004178	0.004178	0.004178	
		4	ROADBED	20	14400	0.35	11.2	10.74	-1	-12.8	-0.4	0.01056	-0.03386	24	0.3887	6.7387	12.4	0.002617	0.002617	0.002617	0.002617	
							47.2	6.32	0.5	-1.2	0	0.001941	-0.004116	36	0.1545	5.5816	9.66	0.001297	0.001297	0.001297	0.001297	
	4	1	AC	4.6	611300	0.33	0	14.53	-210.2	-79.6	0	-0.01933	0.009872	60	0.0201	5.0423	3.75	0.000515	0.000515	0.000515	0.000515	

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSES AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	(in)	STRESS (psi)			SHR	STRAIN		DIST. (in)	RADIAL DEFLECTI (mil)						
								DEF (mil)	RADIAL	VERT		RADIAL	VERT		RADIAL	STRESS	RADIAL	STRAIN			
271028	3	1	AC	9.6	955400	0.3	0	8.253	-125.3	-79.6	0	-0.00645	-7.1E-05	0	0	8.253	-131.34	-0.00645			
	2	BASE	36	29100	0.35	9.6	7.856	85.4	-7.2	-6.3	0.006298	-0.006336	8	0.3646	7.4007	-36.52	-0.00161				
	3	ROADBED	20	17100	0.35	9.6	7.856	-0.3	-7.2	-6.3	0.006298	-0.01969	12	0.4086	6.8988	-12.57	-0.000434				
							45.6	5.108	-0.1	-1	0	0.000915	-0.003069	18	0.3982	6.2999	-1.21	0.000526			
							45.6	5.108	-0.3	-1	0	0.000915	-0.004602	24	0.3514	5.7798	5.5	0.000965			
														36	0.2145	5.0313	11.83	0.001118			
271029	3	1	AC	8	868500	0.3	0	8.548	-149.4	-79.6	0	-0.009102	0.001652	0	0	8.548	-157.57	-0.009102			
	2	BASE	36	24700	0.35	8	8.175	113.8	-9.5	-9.9	0.009305	-0.009213	8	0.5102	7.3717	-43.99	-0.002121				
	3	ROADBED	20	23600	0.35	8	8.175	-0.6	-9.5	-9.9	0.009305	-0.03007	12	0.5635	6.6265	-13.33	-0.000294				
							44	3.984	-0.3	-1.3	0	0.001081	-0.00425	18	0.5258	5.6992	3.17	0.001102			
							44	3.984	-0.3	-1.3	0	0.001081	-0.004516	24	0.4447	4.9228	9.07	0.001507			
														36	0.2501	3.8601	14.55	0.001461			
271029	3	1	AC	8.6	880600	0.34	0	10.85	-146.6	-79.6	0	-0.007739	0.002794	0	0	10.85	-160.73	-0.007739			
	2	BASE	36	23800	0.35	8.6	10.48	107.4	-8.4	-8	0.008193	-0.009513	8	0.4436	9.809	-49.21	-0.00225				
	3	ROADBED	20	12800	0.35	8.6	10.48	-0.4	-8.4	-8	0.008193	-0.02614	12	0.505	9.158	-18.23	-0.000606				
							44.6	6.848	-0.1	-1	0	0.001327	-0.004028	18	0.4898	8.3443	-1.78	0.000733			
							44.6	6.848	-0.3	-1	0	0.001327	-0.006349	24	0.4272	7.6448	6.41	0.001249			
														36	0.2549	6.6484	14	0.00137			
271087	3	1	AC	15.3	1965500	0.3	0	3.988	-91.6	-79.6	0	-0.001961	-0.001118	0	0	3.988	-95.58	-0.001961			
	2	BASE	36	17100	0.35	15.3	3.726	42.2	-1.7	-2.1	0.001505	-0.001399	8	0.1063	3.6896	-19.49	-0.000338				
	3	ROADBED	20	37100	0.35	15.3	3.726	-0.4	-1.7	-2.1	0.001505	-0.006769	12	0.1163	3.55	-6	-0.000144				
							51.3	2.265	-0.5	-0.8	0	-0.000111	-0.002704	18	0.1201	3.4193	-4.64	0			
							51.3	2.265	-0.5	-0.8	0	-0.000111	-0.001187	24	0.1151	3.2995	0.23	0.000169			
														36	0.0821	3.1098	6.75	0.000339			
273013	4	1	AC	7.6	6238000	0.15	0	7.456	-182	-79.6	0	-0.002212	-0.000308	0	0	7.456	-178.44	-0.002212			
	2	BASE	5	21500	0.35	7.6	7.405	162.4	-3.4	-7.2	0.002166	-0.000883	8	0.1299	7.2115	-59.87	-0.000662				
	3	SUBBASE	36	6400	0.35	7.6	7.405	-0.1	-3.4	-7.2	0.002166	-0.006947	12	0.1498	7.0335	-26.01	-0.000266				
							12.6	7.096	0.2	-1.2	0	0.002417	-0.005983	18	0.1516	6.7718	1.09	0.000121			
							12.6	7.096	-0.4	-1.2	0	0.002417	-0.0139	24	0.1373	6.5302	15.47	0.00033			
							48.6	3.635	-0.5	-0.8	0	-0.00031	-0.007223	36	0.0853	6.1603	31	0.000445			
							48.6	3.635	-0.5	-0.8	0	-0.00031	-0.001759	60	0.0137	5.8898	21.84	0.000343			

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH				MECHANISTIC RESPONSES UNDER THE LOAD						RAD. MECHANISTIC RESPONSES AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	(in)	STRESS (psi)			STRAIN			DIST. (in)	RADIAL DISPL	DEFLECT (in)	RADIAL STRESS	STRAIN			
								DEF (mil)	RADIAL	VERT	SHR	RADIAL	VERT								
274034	3	1	AC	10.5	7686600	0.15	0	14.04	-115.8	-79.6	0	-0.001096	-0.000546	0	0	14.04	-114.32	-0.001096			
		2	BASE	3.6	46600	0.35	10.5	13.98	87.8	-1.7	-2.5	0.000953	-0.000385	8	0.0631	13.9196	-30.69	-0.000254			
		3	ROADBED	45.9	6700	0.35	10.5	13.98	0.1	-1.7	-2.5	0.000953	-0.000251	12	0.071	13.8425	-13.89	-0.000121			
							14.1	13.9	0.3	-0.9	0	0.00109	-0.002354	18	0.0735	13.7583	-2.75	2.1E-05			
							14.1	13.9	-0.4	-0.9	0	0.00109	-0.009317	24	0.0687	13.6642	6.58	0.000127			
														36	0.0464	13.5192	17.28	0.000211			
														60	0.0077	13.4075	15.1	0.000193			
274034	3	1	AC	9.5	5689500	0.15	0	25.73	-132	-79.6	0	-0.001709	-0.000843	0	0	25.73	-129.81	-0.001709			
		2	BASE	3.6	35500	0.35	9.5	25.66	106.9	-1.9	-3	0.00156	-0.000637	8	0.0995	25.5438	-38.92	-0.000453			
		3	ROADBED	46.9	3600	0.35	9.5	25.66	0.2	-1.9	-3	0.00156	-0.003679	12	0.1135	25.425	-17.6	-0.000206			
							13.1	25.53	0.6	-0.9	-0.1	0.001898	-0.003571	18	0.1169	25.26	-2.05	5.1E-05			
							13.1	25.53	-0.3	-0.9	-0.1	0.001898	-0.01686	24	0.1082	25.1025	8.89	0.00022			
														36	0.071	24.86	20.91	0.000339			
														60	0.0116	24.6775	16.85	0.00029			
274050	4	1	AC	7.9	5566600	0.15	0	5.93	-159.6	-79.6	0	-0.002138	-0.000472	0	0	5.93	-155.82	-0.002138			
		2	BASE	5	39200	0.35	7.9	5.87	137.3	-4.9	-5.9	0.00205	-0.000878	8	0.1232	5.6925	-46.95	-0.000559			
		3	SUBBASE	36	36600	0.35	7.9	5.87	-0.5	-4.9	-5.9	0.00205	-0.007394	12	0.1392	5.5268	-17.44	-0.000184			
		4	ROADBED	20	18000	0.35	12.9	5.558	-0.4	-2.4	-0.1	0.001438	-0.00529	18	0.1376	5.2956	3.74	0.000157			
						12.9	5.558	-0.4	-2.4	-0.1	0.001438	-0.005559	24	0.1226	5.0862	13.89	0.000322				
						48.9	4.542	-0.3	-0.8	0	0.000229	-0.00153	36	0.0746	4.7748	24.64	0.000399				
						48.9	4.542	-0.3	-0.8	0	0.000229	-0.002825	60	0.0117	4.5518	16.75	0.000294				
275076	4	1	AC	9.1	6606600	0.15	0	6.226	-138.8	-79.6	0	-0.00156	-0.000523	0	0	6.226	-136.75	-0.00156			
		2	BASE	6.5	13000	0.35	9.1	6.168	115.6	-2.6	-5.8	0.001456	-0.000592	8	0.0908	6.0581	-41.31	-0.000416			
		3	SUBBASE	36	12700	0.35	9.1	6.168	-0.4	-2.6	-5.8	0.001456	-0.008053	12	0.1036	5.9455	-18.3	-0.000181			
		4	ROADBED	20	20300	0.35	15.6	5.71	-0.4	-1.1	0	0.000883	-0.006272	18	0.1059	5.7883	-1.15	5.9E-05			
						15.6	5.71	-0.4	-1.1	0	0.000883	-0.006409	24	0.0974	5.6434	10.02	0.000209				
						51.6	4.068	-0.4	-0.7	0	-0.000214	-0.003368	36	0.063	5.4165	22.16	0.000308				
						51.6	4.068	-0.5	-0.7	0	-0.000214	-0.002013	60	0.0103	5.245	17.28	0.000256				
276064	4	1	AC	6.3	541400	0.31	0	8.596	-105.1	-79.6	0	-0.0086	-0.002018	0	0	8.596	-111.22	-0.0086			
		2	BASE	7.2	227400	0.3	6.3	8.088	24.3	-37.3	-5.2	0.005209	-0.009861	8	0.4396	7.2868	-18.22	-0.000745			
		3	SUBBASE	4.8	145400	0.35	6.3	8.088	1.3	-37.3	-5.2	0.005209	-0.01646	12	0.4488	6.633	-0.56	0.000367			
		4	ROADBED	41.7	17900	0.35	13.5	7.358	12.4	-8	-1	0.004792	-0.006789	18	0.4083	6.0286	0.52	0.000733			
						13.5	7.358	6.5	-8	-1	0.004792	-0.008593	24	0.3613	5.5457	2	0.000883				
						18.3	6.99	12.2	-3.1	-0.5	0.006185	-0.008057	36	0.2368	4.8648	6.22	0.001094				
						18.3	6.99	0.2	-3.1	-0.5	0.006185	-0.01724	60	0.0386	4.3695	5.87	0.000966				

Mechanistic responses - North Central Region (continued).

SHRP ID		NO. LAY	LAYER INFORMATION				DEPTH MECHANISTIC RESPONSES UNDER THE LOAD						RAD. MECHANISTIC RESPONSES AT DEPTH = 0.					
			NO.	TYPE	THICK	MODULU	POIS	(in)	STRESS (psi)		STRAIN		DIST. (in)	DEFLECT (mil)		RADIAL STRESS	RADIAL STRAIN	
									DEF (mil)	RADIAL	VERT	SHR		RADIAL	VERT			RADIAL
295047	4	1	AC	8.1	4194200	0.15	0	6.773	-161.4	-79.6	0	-0.002923	-0.000657	0	0	6.773	-159.97	-0.002923
		2	BASE	3.5	26800	0.35	8.1	6.692	140.9	-2.9	-5.1	0.002809	-0.001129	8	0.1707	6.4541	-50.12	-0.000809
		3	SUBBASE	36	9300	0.45	8.1	6.692	0.1	-2.9	-5.1	0.002809	-0.007601	12	0.1952	6.2295	-21.72	-0.000333
		4	ROADBED	20	15200	0.45	11.6	6.451	0.5	-1.5	-0.1	0.003042	-0.006658	18	0.1975	5.9069	0.73	0.000153
295047							11.6	6.451	-0.7	-1.5	-0.1	0.003042	-0.009189	24	0.1794	5.6096	13.15	0.00042
							47.6	4.819	-0.7	-0.8	0	-0.001142	-0.001916	36	0.1128	5.1532	26.8	0.000577
							47.6	4.819	-0.7	-0.8	0	-0.001142	-0.001105	60	0.0182	4.8155	19.44	0.000454
							0	6.34	-153.7	-79.6	0	-0.002305	-0.000595	0	0	6.34	-152.03	-0.002305
295081	4	1	AC	8.5	5029800	0.15	0	6.34	132.6	-2.2	-4.3	0.002199	-0.000879	8	0.135	6.0916	-48.01	-0.000647
		2	BASE	3.5	17300	0.35	8.5	6.27	132.6	-2.2	-4.3	0.002199	-0.007115	12	0.1548	5.9188	-21.63	-0.000281
		3	SUBBASE	36	5300	0.45	8.5	6.27	-0.1	-2.2	-4.3	0.002199	-0.006516	18	0.1583	5.6711	-0.79	9.7E-05
		4	ROADBED	20	18300	0.45	12	6.038	0.1	-1.1	0	0.002423	-0.006516	24	0.145	5.4404	11.8	0.00032
295081							12	6.038	-0.7	-1.1	0	0.002423	-0.009427	36	0.0927	5.0836	25.58	0.000462
							48	4.036	-0.7	-0.8	0	-0.000386	-0.003169	60	0.015	4.8163	19.31	0.000376
							0	5.023	-105.8	-79.6	0	-0.002225	-0.001325	0	0	5.023	-104.49	-0.002225
							10.1	4.897	69.8	-5.9	-3.1	0.001724	-0.000823	8	0.1244	4.774	-22.95	-0.000385
295403	4	1	AC	10.1	3414500	0.15	0	4.897	4.6	-5.9	-3.1	0.001724	-0.003069	12	0.1357	4.6285	-7.98	-0.000137
		2	BASE	4.4	281000	0.35	10.1	4.897	7.9	-2.1	-0.4	0.002078	-0.002722	18	0.1356	4.4501	0.15	0.000103
		3	SUBBASE	36	33500	0.45	14.5	4.78	-0.4	-2.1	-0.4	0.002078	-0.005112	24	0.124	4.2864	6.56	0.000268
		4	ROADBED	20	17000	0.45	14.5	4.78	-0.5	-0.7	0	7.6E-05	-0.000645	36	0.081	4.0357	14.08	0.000386
295403							50.5	4.105	-0.5	-0.7	0	7.6E-05	-0.001172	60	0.0132	3.8467	11.47	0.000333
							0	11.8	-209.8	-79.6	0	-0.007347	-0.0028	0	0	11.8	-231.92	-0.007347
							4.3	11.71	118.8	-35.6	-14.5	0.005645	-0.006109	8	0.3737	10.738	-50.47	-0.00089
							4.3	11.71	7.7	-35.6	-14.5	0.005645	-0.01623	12	0.3845	10.0525	-3.9	0.000494
295403							10.3	11.1	24.9	-7.8	-2	0.00929	-0.00788	18	0.3257	9.2398	11.98	0.001063
							10.3	11.1	0.6	-7.8	-2	0.00929	-0.02529	24	0.2654	8.6067	10.82	0.001001
							46.3	8.054	0.2	-0.9	0	0.001274	-0.003027	36	0.1449	7.7766	17.76	0.000882
							46.3	8.054	-0.3	-0.9	0	0.001274	-0.006601	60	0.0217	7.2483	10.59	0.000547
295403	4	1	AC	3.6	2766800	0.3	0	6.013	-189.1	-79.6	0	-0.004018	0.001198	0	0	6.013	-213.38	-0.004018
		2	BASE	6.5	846800	0.2	3.6	5.982	46.9	-50.4	-13.3	0.001628	-0.002941	8	0.2154	5.4525	-58.2	-0.000805
		3	SUBBASE	36	23700	0.35	3.6	5.982	4.5	-50.4	-13.3	0.001628	-0.006081	12	0.2352	5.0668	-18.37	-0.000107
		4	ROADBED	20	26200	0.35	10.1	5.736	57.1	-4.2	-4.2	0.005405	-0.003303	18	0.2237	4.6221	-1.3	0.000325
295403							10.1	5.736	-0.1	-4.2	-4.2	0.005405	-0.01632	24	0.1984	4.2239	7.06	0.000515
							46.1	3.328	-0.4	-1	0	0.000365	-0.002836	36	0.1232	3.6394	20.32	0.000636
							46.1	3.328	-0.4	-1	0	0.000365	-0.002866	60	0.0195	3.2198	15.58	0.00049

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD							RAD. MECHANISTIC RESPONSES AT DEPTH = 0.				
		TYPE	THICK	MODULU	POIS		DEF (mil)	STRESS (psi)			STRAIN	DIST. (in)	RADIAL DISPL (mil)	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN		
								RADIAL	VERT	SHR								
295413	4	1 AC	3.7	1501500	0.3	0	8.595	-184.9	-79.6	0	-0.007277	0	0	8.595	-208.17	-0.007277		
	2 BASE	5	5455000	0.2	3.7	8.534	47.8	-47.5	-12.5	0.002987	8	0.3887	7.5742	-55.77	-0.001382			
	3 SUBBASE	36	24900	0.35	3.7	8.534	8.4	-47.5	-12.5	0.002987	12	0.4191	6.9058	-14.05	2.1E-05			
	4 ROADBED	20	20100	0.35	8.7	8.205	65.1	-7.3	-5.9	0.009708	18	0.3818	6.0698	4.64	0.00086			
313028	4	1 AC	8.2	4598600	0.15	0	5.69	-144.5	-79.6	0	-0.002354	0	0	5.69	-142.92	-0.002354		
	2 BASE	2.6	142800	0.2	8.2	5.613	118.5	-5.4	-4.6	0.00216	8	0.1347	5.4288	-39.59	-0.000555			
	3 SUBBASE	36	38600	0.45	8.2	5.613	2.7	-5.4	-4.6	0.00216	12	0.1507	5.2535	-14.48	-0.000183			
	4 ROADBED	20	15100	0.45	10.8	5.524	3.8	-3	-0.3	0.002556	18	0.1489	5.0133	3.25	0.000167			
313028	4	1 AC	8.4	4941000	0.15	0	5.182	-129.4	-79.6	0	-0.001937	0	0	5.182	-127.95	-0.001937		
	2 BASE	2.2	1743300	0.2	8.4	5.107	80.7	-7.5	-5.6	0.001381	8	0.1118	4.9714	-35.85	-0.00047			
	3 SUBBASE	36	17600	0.45	8.4	5.107	28.5	-7.5	-5.6	0.001381	12	0.1261	4.8335	-15.44	-0.000202			
	4 ROADBED	20	17200	0.45	10.6	5.084	46.3	-1.7	-3.5	0.00214	18	0.1286	4.6469	-0.91	7.5E-05			
317017	4	1 AC	3.2	173900	0.35	0	12.61	-48.2	-79.6	0	-0.002803	0	0	12.61	-52.18	-0.002803		
	2 BASE	7.9	2346300	0.15	3.2	11.78	-46.2	-73.3	-7.1	-0.003049	8	0.2852	11.3141	-12.18	-0.00345			
	3 SUBBASE	5	8000	0.35	3.2	11.78	-100.6	-73.3	-7.1	-0.003049	12	0.4081	10.8575	-4.86	-0.002408			
	4 ROADBED	43.9	7800	0.45	11.1	11.65	114.8	-2.8	-4.4	0.004052	18	0.4833	10.4658	-2.36	-0.000256			
382001	4	1 AC	2.5	510800	0.3	0	10.87	-0.4	-1.4	0	0.002839	0	0	10.87	2.68	0.001412		
	2 BASE	6.2	2794400	0.2	2.5	9.498	-76.7	-79.6	-1.4	0	-0.006046	8	0.3929	8.7284	-24.79	-0.006046		
	3 SUBBASE	3	20000	0.35	2.5	9.314	-139.4	-72.3	-11.3	-0.003376	12	0.472	8.2837	-11.6	-0.001219			
	4 ROADBED	48.3	11400	0.45	8.7	9.22	170	-4.3	-7.2	0.004801	18	0.4905	7.6928	-2.38	0.000334			
						11.7	8.821	0.2	-2.3	-0.1	0.004738	36	0.2731	6.2789	8.15	0.001104		
						11.7	8.821	-0.9	-2.3	-0.1	0.004738	60	0.0426	5.6615	6.07	0.001424		

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	NO.	LAYER INFORMATION				DEPTH (in)		MECHANISTIC RESPONSES UNDER THE LOAD						RAD. MECHANISTIC RESPONSES AT DEPTH = 0.			
			TYPE	THICK	MODULU	POIS	(in)	STRESS (psi)		STRAIN		DIST. (in)	RADI. DISPL	DEFLECT (mil)	RADI. STRESS	RADIAL STRAIN		
								DEF (mil)	VERT	RADI. STRESS	VERT						SHR	RADI. STRESS
393801	4	1	AC	9	2577200	0.15	0	16.62	-85.7	-79.6	0	-0.002282	-0.001998	0	0	16.62	-84.13	-0.002282
	2	BASE	4.7	1831200	0.2	9	16.45	21.2	-18.6	-4.1	0.000779	-0.001002	8	0.1218	16.3478	-12.31	-0.000189	
	3	SUBBASE	36	56800	0.45	9	16.45	13.3	-18.6	-4.1	0.000779	-0.001297	12	0.1266	16.2125	-2.17	-2.8E-05	
	4	ROADBED	20	4100	0.45	13.7	16.4	37.8	-2.7	-2.6	0.001672	-0.000996	18	0.1242	16.0633	0.05	9.9E-05	
394018							13.7	16.4	-0.4	-2.7	-2.6	0.001672	-0.004066	24	0.1141	15.9367	4.01	0.000232
							49.7	15.9	-0.2	-0.5	0	0.000206	-0.000599	36	0.0765	15.7383	9.38	0.000348
							49.7	15.9	-0.4	-0.5	0	0.000206	-0.003819	60	0.0126	15.5925	8.25	0.000314
							0	3.285	-104.2	-79.6	0	-0.002061	-0.001264	0	0	3.285	-102.99	-0.002061
394018	4	1	AC	10	3625500	0.15	10	3.166	61	-6.8	-3.1	0.001428	-0.000726	8	0.1156	3.0556	-22.91	-0.000365
	2	BASE	3.5	744500	0.3	10	3.166	12.4	-6.8	-3.1	0.001428	-0.001882	12	0.1266	2.9218	-8.72	-0.00015	
	3	SUBBASE	36	17900	0.35	13.5	3.104	21.3	-1.7	-1	0.002068	-0.00197	18	0.1282	2.7573	-0.97	7E-05	
	4	ROADBED	20	55700	0.35	13.5	3.104	-0.3	-1.7	-1	0.002068	-0.007792	24	0.1187	2.6049	5.91	0.000237	
394018							49.5	1.534	-0.5	-0.8	0	-7.5E-05	-0.002772	36	0.079	2.3681	14.13	0.000368
							49.5	1.534	-0.5	-0.8	0	-7.5E-05	-0.00843	60	0.013	2.1858	11.99	0.000325
							0	2.454	-102	-79.6	0	-0.001215	-0.000776	0	0	2.454	-100.49	-0.001215
							10.6	2.38	63.2	-5.2	-2.6	0.000892	-0.000424	8	0.068	2.3186	-22.18	-0.000213
463013	4	1	AC	9.4	3532100	0.15	9.4	6.775	103.9	-2.9	-2.9	0.002446	-0.001026	8	0.1536	6.5955	-35.41	-0.000647
	2	BASE	3.5	9200	0.35	9.4	6.775	-0.8	-2.9	-2.9	0.002446	-0.01654	12	0.173	6.407	-14.4	-0.000258	
	3	SUBBASE	36	26200	0.45	12.9	6.249	-0.9	-1.8	0	0.000941	-0.01334	18	0.1748	6.1537	0.04	0.000126	
	4	ROADBED	20	12700	0.45	12.9	6.249	-1.1	-1.8	0	0.000941	-0.003334	24	0.1594	5.9215	9.36	0.000359	
553010							48.9	5.538	-0.5	-0.7	0	0.000193	-0.001058	36	0.1022	5.5633	19.34	0.000504
							48.9	5.538	-0.5	-0.7	0	0.000193	-0.001774	60	0.0165	5.2963	14.86	0.000412
	4	1	AC	10.7	2013100	0.15	0	5.632	-98.4	-79.6	0	-0.003454	-0.002357	0	0	5.632	-96.85	-0.003454
	2	BASE	7.8	89600	0.35	10.7	5.408	64.1	-5.7	-3.7	0.002678	-0.001294	8	0.1897	5.2383	-18.71	-0.000487	
553010	3	SUBBASE	36	26800	0.35	10.7	5.408	1	-5.7	-3.7	0.002678	-0.006424	12	0.2031	5.017	-5.07	-0.000127	
	4	ROADBED	20	21900	0.35	18.5	5.046	2.1	-2.1	-0.1	0.002337	-0.003986	18	0.1994	4.76	1.04	0.000195	
							18.5	5.046	-0.1	-2.1	-0.1	0.002337	-0.007386	24	0.1805	4.5295	6.16	0.000418
							54.5	3.764	-0.4	-0.8	0	9.7E-05	-0.001857	36	0.1163	4.1828	12.08	0.000563
							54.5	3.764	-0.4	-0.8	0	9.7E-05	-0.002259	60	0.0187	3.9242	9.58	0.000467

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)				MECHANISTIC RESPONSES UNDER THE LOAD												RAD. MECHANISTIC RESPONSES AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS		DEF (mil)	STRESS (psi)			SHR	STRAIN		DIST. (in)	RADI	DEFLECT (mil)	STRESS	RADI	STRAIN							
									RADI	VERT	RADI		VERT														
553012	4	1	AC	7	862900	0.15	0	15.1	-131.4	-79.6	0	-0.01116	-0.004143	0	0	0	15.1	-128.75	-0.01116	-0.01116							
		2	BASE	6	100000	0.35	7	14.72	86.8	-18	-7.1	0.008636	-0.005289	8	0.6042	13.7977	-26.11	-0.00165	-0.00165								
		3	SUBBASE	5.8	27000	0	7	14.72	4.2	-18	-7.1	0.008636	-0.01993	12	0.6411	12.985	-3.27	4.3E-05	4.3E-05								
		4	ROADBED	41.2	8900	0.35	13	13.83	11.8	-5	-0.5	0.009336	-0.01329	18	0.5926	11.9683	7.06	0.001156	0.001156								
553014							13	13.83	2.5	-5	-0.5	0.009336	-0.01791	24	0.5127	11.1217	9.81	0.001494	0.001494								
							18.8	13.11	2.7	-2.4	-0.2	0.009336	-0.008912	36	0.3093	9.9007	15.48	0.001644	0.001644								
							18.8	13.11	0.1	-2.4	-0.2	0.009336	-0.02793	60	0.0489	9.0415	10.8	0.001226	0.001226								
		1	AC	10.3	5228400	0.15	0	2.734	-109.5	-79.6	0	-0.001511	-0.000842	0	0	2.734	-108.08	-0.001511	-0.001511								
553015	4	2	BASE	6	76200	0.35	10.3	2.652	80.2	-3.9	-3.8	0.001286	-0.00056	8	0.085	2.5667	-25.04	-0.000283	-0.000283								
		3	SUBBASE	36	56700	0.45	10.3	2.652	-0.2	-3.9	-3.8	0.001286	-0.003918	12	0.0933	2.4657	-8.98	-0.000102	-0.000102								
		4	ROADBED	20	34400	0.45	16.3	2.464	0	-2	-0.1	0.000913	-0.002611	18	0.0933	2.3412	0.4	7.5E-05	7.5E-05								
							16.3	2.464	-0.7	-2	-0.1	0.000913	-0.002444	24	0.0849	2.2268	7.31	0.000191	0.000191								
553015							52.3	2.065	-0.5	-0.7	0	7E-05	-0.000453	36	0.0548	2.0527	14.97	0.000267	0.000267								
							52.3	2.065	-0.5	-0.7	0	7E-05	-0.000666	60	0.0088	1.923	11.77	0.000221	0.000221								
	4	1	AC	9.8	4083600	0.15	0	5.718	-117.3	-79.6	0	-0.002075	-0.001007	0	0	5.718	-114.92	-0.002075	-0.002075								
		2	BASE	8	49800	0.35	9.8	5.617	89.4	-4.3	-4.8	0.001819	-0.000802	8	0.1176	5.4893	-29.35	-0.000444	-0.000444								
553015		3	SUBBASE	36	36800	0.35	9.8	5.617	-0.3	-4.3	-4.8	0.001819	-0.005839	12	0.1305	5.3475	-10.74	-0.000159	-0.000159								
		4	ROADBED	20	18100	0.35	17.8	5.263	-0.1	-1.8	0	0.001151	-0.003515	18	0.1306	5.1651	0.62	0.000108	0.000108								
							17.8	5.263	-0.3	-1.8	0	0.001151	-0.004342	24	0.1186	4.9982	8.26	0.000273	0.000273								
							53.8	4.438	-0.3	-0.7	0	0.00011	-0.001315	36	0.0758	4.7462	16.47	0.000374	0.000374								
553015	4	1	AC	9.4	4698600	0.15	0	6.405	-124.8	-79.6	0	-0.001941	-0.000826	0	0	6.405	-122.64	-0.001941	-0.001941								
		2	BASE	8	41000	0.35	9.4	6.32	98.8	-4.1	-5.6	0.00175	-0.000755	8	0.1107	6.1914	-32.75	-0.00044	-0.00044								
		3	SUBBASE	36	40100	0.35	9.4	6.32	-0.4	-4.1	-5.6	0.00175	-0.006259	12	0.1237	6.0565	-12.4	-0.000161	-0.000161								
		4	ROADBED	20	15400	0.35	17.4	5.934	-0.4	-1.8	0	0.000949	-0.003769	18	0.1238	5.8771	0.92	0.000106	0.000106								
556354							17.4	5.934	-0.4	-1.8	0	0.000949	-0.003851	24	0.1121	5.7137	9.26	0.000264	0.000264								
							53.4	5.187	-0.3	-0.7	0	0.000139	-0.001227	36	0.0711	5.4652	18.16	0.000356	0.000356								
							53.4	5.187	-0.3	-0.7	0	0.000139	-0.002919	60	0.0114	5.2828	13.66	0.000285	0.000285								
	4	1	AC	9.6	8239901	0.15	0	2.581	-127.3	-79.6	0	-0.001132	-0.000462	0	0	2.581	-125.07	-0.001132	-0.001132								
556354		2	BASE	3.3	85600	0.35	9.6	2.533	101.3	-2.4	-2.6	0.001021	-0.000426	8	0.0654	2.4582	-35.93	-0.000284	-0.000284								
		3	SUBBASE	17.7	16600	0.35	9.6	2.533	0.4	-2.4	-2.6	0.001021	-0.00236	12	0.0741	2.3803	-15.51	-0.000123	-0.000123								
		4	ROADBED	29.4	55500	0.35	12.9	2.459	0.9	-1.3	-0.1	0.001217	-0.002272	18	0.0757	2.2724	-1.31	4E-05	4E-05								
							12.9	2.459	-0.4	-1.3	-0.1	0.001217	-0.006195	24	0.0698	2.1731	8.64	0.000146	0.000146								
556354							30.6	1.634	-0.5	-1	0	-2E-06	-0.003546	36	0.0455	2.0185	19.52	0.000219	0.000219								
							30.6	1.634	-0.5	-1	0	-2E-06	-0.001059	60	0.0074	1.9005	15.61	0.000186	0.000186								

Mechanistic responses - North Central Region (continued).

MECHANISTIC RESPONSES UNDER THE LOAD										MECHANISTIC RESPONSES AT DEPTH = 0.									
SHRP ID	NO. LAY	NO.	LAYER INFORMATION			DEPTH (in)	MECHANISTIC RESPONSES UNDER THE LOAD						RAD. DIST. (in)	MECHANISTIC RESPONSES AT DEPTH = 0.					
			TYPE	THICK	MODULU		POIS	DEF (mil)	STRESS (psi)	RADIAL	VERT	SHR		STRAIN	RADIAL	VERT	RADIAL DISPL	DEFLECT (mil)	RADIAL STRESS
833802	4	1	AC	9.8	6626200	0.15	0	7.057	-121	-79.6	0	-0.001325	-0.000604	0	0	7.057	-118.62	-0.001325	-0.000312
		2	BASE	5.8	77600	0.35	9.8	6.996	92.8	-3.6	-3.9	0.001162	-0.000502	8	0.076	6.9124	-32.4	-0.000312	-0.00013
		3	SUBBASE	6.9	90800	0.2	9.8	6.996	0	-3.6	-3.9	0.001162	-0.0003289	12	0.0854	6.822	-13.39	-0.00013	4.8E-05
		4	ROADBED	37.5	10800	0.45	15.6	6.853	0	-1.4	-0.1	0.000659	-0.001833	18	0.0869	6.7024	-1.09	0.000166	0.000249
836450							15.6	6.853	0.4	-1.4	-0.1	0.000659	-0.001719	24	0.0802	6.5913	7.79	0.000249	0.000217
							22.5	6.754	0.9	-0.8	-0.1	0.000998	-0.001339	36	0.0527	6.4188	17.74	0.000217	-0.00246
							22.5	6.754	-0.5	-0.8	-0.1	0.000998	-0.003763	60	0.0087	6.2868	14.64	0.000217	-0.000622
							0	14.21	-211.8	-79.6	0	-0.02446	0.01165	0	0	14.21	-242.68	-0.02446	0.000622
836451	4	1	AC	4.1	499100	0.32	4.1	13.88	156.2	-35.5	-13	0.02412	-0.02674	8	1.098	10.3639	-28.45	0.000622	0.000508
		2	BASE	4.5	31000	0.35	4.1	13.88	-6.5	-35.5	-13	0.02412	-0.09283	12	0.9887	8.0982	22.06	0.000508	0.00478
		3	SUBBASE	3	78600	0.35	8.6	10.67	-6	-19.1	-1.3	0.008946	-0.04759	18	0.6453	5.9389	24.28	0.00478	0.002711
		4	ROADBED	48.4	25200	0.35	8.6	10.67	0.6	-19.1	-1.3	0.008946	-0.02495	24	0.4384	4.6433	8.88	0.002711	0.001453
836454							11.6	9.92	11.1	-12.7	-1.4	0.01483	-0.0261	36	0.1946	3.3205	8.55	0.001453	0.000687
							11.6	9.92	-0.6	-12.7	-1.4	0.01483	-0.04671	60	0.027	2.6557	3.97	0.000687	-0.02328
							0	15.15	-229.9	-79.6	0	-0.02328	0.01573	0	0	15.15	-276.12	-0.02328	-0.000214
							4.1	14.86	171.4	-34.9	-20.2	0.02338	-0.02821	8	1.0682	11.4195	-41.69	-0.000214	0.004457
836454	4	1	AC	3	750400	0.3	3	7.693	-32.8	-67.5	-8.3	-0.00573	-0.006774	8	0.4106	6.838	-29.6	-0.00573	0.0004664
		2	BASE	7.9	728900	0.3	3	7.693	-36.7	-67.5	-8.3	-0.00573	-0.006221	12	0.4566	6.2903	-10.72	-0.00546	0.000409
		3	SUBBASE	36	20100	0.35	10.9	7.254	70.5	-5.4	-4.6	0.00681	-0.006806	18	0.4551	5.6662	-2.7	0.000409	0.000973
		4	ROADBED	20	22200	0.35	10.9	7.254	-0.3	-5.4	-4.6	0.00681	-0.02153	24	0.4116	5.1128	3.74	0.000973	0.001287
836454							46.9	4.01	-0.4	-1	0	0.000592	-0.00376	36	0.263	4.293	10.45	0.001287	0.001039
							46.9	4.01	-0.4	-1	0	0.000592	-0.003535	60	0.0414	3.696	8.68	0.001039	-0.0064
							0	7.791	-239.7	-79.6	0	-0.0064	0.002891	0	0	7.791	-272.49	-0.0064	-0.000612
							3.2	7.755	107.8	-50.9	-20.5	0.003867	-0.005149	8	0.3148	6.7904	-35.2	-0.000612	0.000403
836454	4	1	AC	3.2	359000	0.3	3.2	7.755	-1.4	-50.9	-20.5	0.003867	-0.01337	12	0.3209	6.155	-4.67	0.000403	0.000731
		2	BASE	7.4	23300	0.35	10.6	7.082	41.7	-5.9	-2.5	0.008461	-0.008793	18	0.2783	5.4121	8.25	0.000731	0.000743
		3	SUBBASE	36	23000	0.35	10.6	7.082	0.2	-5.9	-2.5	0.008461	-0.02398	24	0.2362	4.8264	8.78	0.000743	0.000776
		4	ROADBED	20			46.6	3.856	-0.3	-1	0	0.006627	-0.00331	36	0.1386	4.019	21.08	0.000776	0.00054
							46.6	3.856	-0.3	-1	0	0.006627	-0.003458	60	0.0215	3.4763	14.21	0.00054	

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				DEPTH (in)				MECHANISTIC RESPONSES UNDER THE LOAD				RAD. MECHANISTIC RESPONSES AT DEPTH = 0.				
		NO.	TYPE	THICK	MODULU	POIS	DEF (in)	STRESS (psi)		SHR	STRAIN		DIST. (in)	RADIAL DISPL (in)	DEFLECT (mil)	RADIAL STRESS	RADIAL STRAIN	
								(mil)	VERT		RADIAL	RADIAL						
901802	3	1	AC	7.2	199800	0.3	0	29.82	-158.1	-79.6	0	-0.04428	0.01123	0	0	29.82	-166.67	-0.04428
	2	BASE	36	6700	0.45	7.2	28.25	122.2	-13	-11.5	0	0.04595	-0.04684	8	2.4102	23.9168	-43.58	-0.008705
	3	ROADBED	20	9400	0.45	7.2	28.25	-3	-13	-11.5	0	0.04595	-0.118	12	2.589	20.16	-8.41	0.000978
							43.2	10.16	-0.7	-1.7	0	0.005572	-0.01523	18	2.2658	15.6192	8.63	0.007165
							43.2	10.16	-0.4	-1.7	0	0.005572	-0.01399	24	1.8085	12.0258	11.43	0.00775
													36	0.909	7.4527	13.64	0.0061	
901802	3	1	AC	7.4	199100	0.35	0	26.69	-164.3	-79.6	0	-0.03853	0.02117	0	0	26.69	-184.09	-0.03853
	2	BASE	36	6200	0.45	7.4	25.24	126.5	-12.3	-10.4	0	0.04244	-0.05215	8	2.1453	21.3427	-54.8	-0.009855
	3	ROADBED	20	12900	0.45	7.4	25.24	-2.7	-12.3	-10.4	0	0.04244	-0.1097	12	2.3775	17.8975	-15.53	-0.000598
							43.4	7.606	-1	-1.8	0	0.004183	-0.01374	18	2.148	13.6417	4.54	0.005795
							43.4	7.606	-0.5	-1.8	0	0.004183	-0.01057	24	1.7505	10.2131	10.26	0.006982
													36	0.912	5.7195	14.46	0.005854	
906400	3	1	AC	10.8	259900	0.3	0	14.72	-96.5	-79.6	0	-0.01618	-0.007222	0	0	14.72	-101.01	-0.01618
	2	BASE	36	24900	0.35	10.8	13.05	47.1	-10.5	-3.7	0	0.01357	-0.01544	8	0.8495	12.2434	-17.95	-0.001837
	3	ROADBED	20	10700	0.35	10.8	13.05	0.2	-10.5	-3.7	0	0.01357	-0.03945	12	0.8622	11.0275	-1.45	0.000429
							46.8	8.251	0.2	-1.1	0	0.001942	-0.004606	18	0.8022	9.8757	1.63	0.001776
							46.8	8.251	-0.2	-1.1	0	0.001942	-0.008226	24	0.6784	8.9503	4.04	0.00227
													36	0.3905	7.7292	6.21	0.002177	
906400	3	1	AC	9.5	199000	0.3	0	15.12	-89.2	-79.6	0	-0.0219	-0.008454	0	0	15.12	-103.68	-0.0219
	2	BASE	36	24300	0.35	9.5	13.11	49.5	-14.8	-4.5	0	0.01895	-0.02311	8	1.1262	11.7515	-17.4	-0.001954
	3	ROADBED	20	14200	0.35	9.5	13.11	0	-14.8	-4.5	0	0.01895	-0.05599	12	1.14	10.0657	0.89	0.001542
							45.5	6.616	0.1	-1.3	0	0.002211	-0.005428	18	0.9729	8.5047	4.13	0.003207
							45.5	6.616	-0.2	-1.3	0	0.002211	-0.008087	24	0.7756	7.3288	5.03	0.003268
													36	0.405	5.8987	5.63	0.002536	
181028	3	1	AC	15.4	821900	0.3	0	5.797	-90.3	-79.6	0	-0.004575	-0.002772	0	0	5.797	-94.19	-0.004575
	2	BASE	36	11700	0.45	15.4	5.168	40.2	-2	-2	0	0.003446	-0.003234	8	0.2462	5.0928	-18.48	-0.000729
	3	ROADBED	20	20900	0.45	15.4	5.168	-0.6	-2	-2	0	0.003446	-0.009595	12	0.2671	4.7648	-5.17	-0.000285
							51.4	3.556	-0.7	-0.8	0	-2.3E-05	-0.001741	18	0.2738	4.466	-4.18	2.4E-05
							51.4	3.556	-0.7	-0.8	0	-2.3E-05	-0.000985	24	0.2612	4.1928	0.34	0.000397
													36	0.1854	3.7654	6.44	0.000771	
													60	0.0312	3.4312	7.1	0.000777	

Mechanistic responses - North Central Region (continued).

SHRP ID	NO. LAY	LAYER INFORMATION				MECHANISTIC RESPONSES UNDER THE LOAD										RAD. MECHANISTIC RESPONSES AT DEPTH = 0.					
		NO.	TYPE	THICK	MODULU	POIS	DEPTH (in)				STRESS (psi)				STRAIN		DIST. (in)	RADI		STRESS	
							DEF (mil)	RADI	VERT	SHR	RADI	VERT	RADI	VERT	RADI	DISPL		DEFLECT (mil)	RADI	STRESS	
271085	3	1	AC	12	358500	0.34	0	15.31	-108.3	-79.6	0	-0.01205	-0.000812	0	0	15.31	-117.73	-0.01205			
		2	BASE	36	10800	0.45	12	14.1	60.8	-4.5	-3.6	0.01145	-0.01308	8	0.6816	13.5021	-29.77	-0.003185			
		3	ROADBED	20	7600	0.45	12	14.1	-0.8	-4.5	-3.6	0.01145	-0.0285	12	0.7752	12.545	-10.84	-0.001271			
							48	9.902	-0.4	-0.9	0	0.001439	-0.004466	18	0.7916	11.5275	-4.78	0.000396			
							48	9.902	-0.5	-0.9	0	0.001439	-0.005437	24	0.7314	10.605	1.72	0.001499			
276251	4	1	AC	7.9	287900	0.3	0	10.36	-103	-79.6	0	-0.0159	-0.00478	0	0	10.36	-107.32	-0.0159			
		2	BASE	10	64100	0.35	7.9	9.146	45.1	-24	-4.3	0.01302	-0.01816	8	0.8017	7.9139	-17.28	-0.001141			
		3	SUBBASE	36	24500	0.35	7.9	9.146	0.8	-24	-4.3	0.01302	-0.03617	12	0.7996	6.681	2.21	0.001452			
		4	ROADBED	20	24800	0.35	17.9	7.006	5.6	-5.7	-0.4	0.008582	-0.01489	18	0.6662	5.5634	4.51	0.002314			
							17.9	7.006	0.3	-5.7	-0.4	0.008582	-0.02379	24	0.5338	4.7418	4.41	0.002127			
							53.9	3.625	-0.3	-1.1	0	0.000707	-0.00342	36	0.294	3.731	5.36	0.001701			
							53.9	3.625	-0.3	-1.1	0	0.000707	-0.003474	60	0.0427	3.1045	3.49	0.001083			
469197	4	1	AC	5.5	278100	0.35	0	25.27	-176.8	-79.6	0	-0.03241	0.01594	0	0	25.27	-211.55	-0.03241			
		2	BASE	5	16400	0.35	5.5	24.51	127.8	-24.5	-7	0.03401	-0.0398	8	1.6387	20.4715	-47.86	-0.004096			
		3	SUBBASE	9	30400	0.35	5.5	24.51	-3.2	-24.5	-7	0.03401	-0.1198	12	1.6673	17.495	-0.81	0.00334			
		4	ROADBED	40.5	7500	0.45	10.5	20.01	-3.5	-12.5	-0.5	0.01293	-0.06081	18	1.3228	14.2392	12.77	0.005798			
							10.5	20.01	-0.7	-12.5	-0.5	0.01293	-0.03943	24	1.0183	11.9283	9.09	0.004589			
							19.5	17.24	6.9	-4	-0.4	0.01917	-0.02931	36	0.5325	9.1494	10.93	0.003255			
							19.5	17.24	-0.6	-4	-0.4	0.01917	-0.04597	60	0.0802	7.464	6.91	0.002023			